



www.gillathletics.com
800-637-3090



S4 POLE VAULT STANDARD INSTALLATION INSTRUCTIONS

Specifications:

This standard has a clamping system and a handle for ease of operation. The clamping knob is facing away from the pit making it more "official friendly". This standard's upright, riser, and offset are constructed of aluminum while the base is made from steel to provide a sturdy foundation for the standard. Dual English/Metric scale is easy to read and calibrate. This standard has a range from 7' to 18' and meets High School and NCAA (with 55mm bar rest pins) specifications.

Operation:

To adjust the riser, grab the handle and loosen the clamping knob. Position the riser at the desired height and retighten the knob. Do not lift the riser by the knob. The scale reads in both English (feet and inches) and Metric (centimeters).


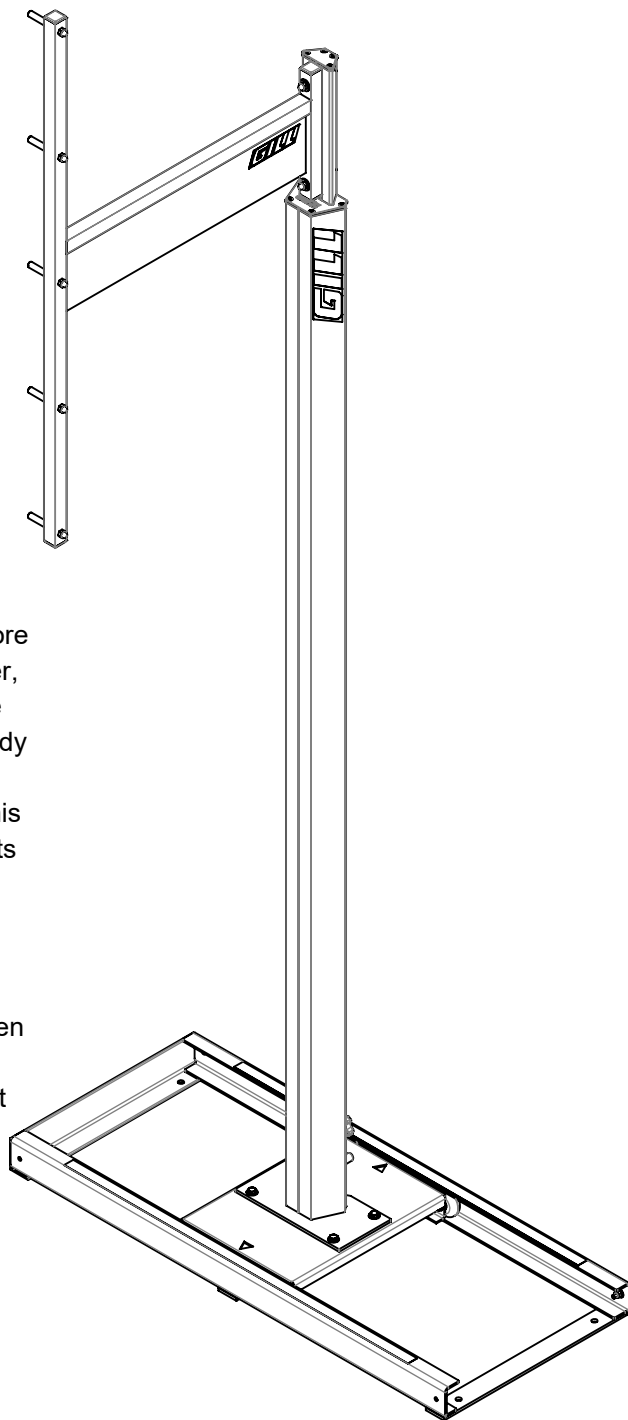
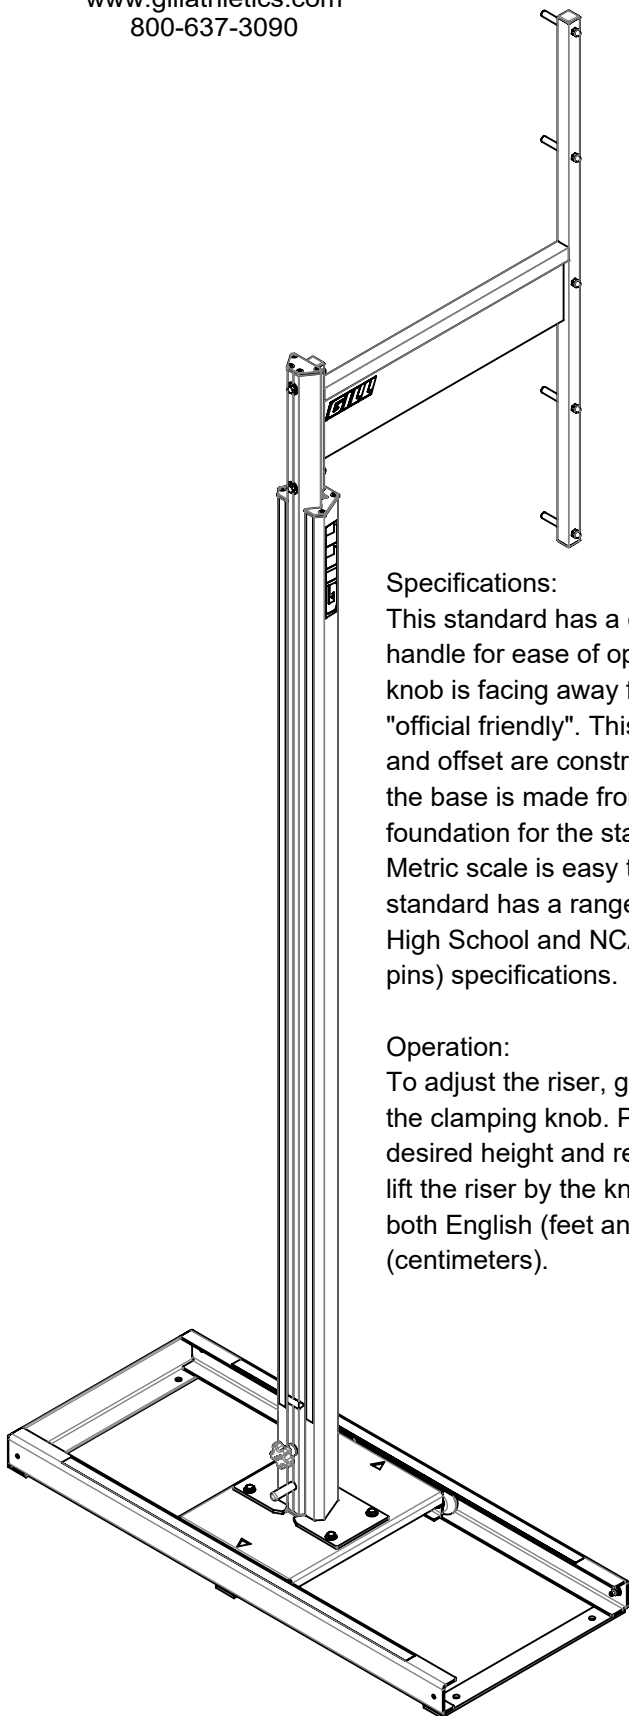


WARNING: This product can expose you to Titanium Dioxide, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.



www.gillathletics.com
800-637-3090

S4 POLE VAULT STANDARD INSTALLATION INSTRUCTIONS

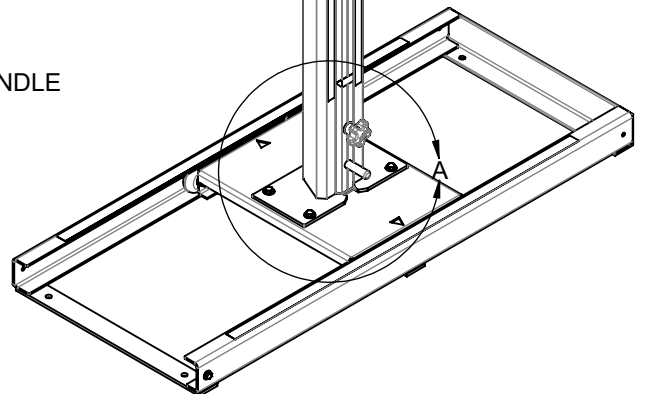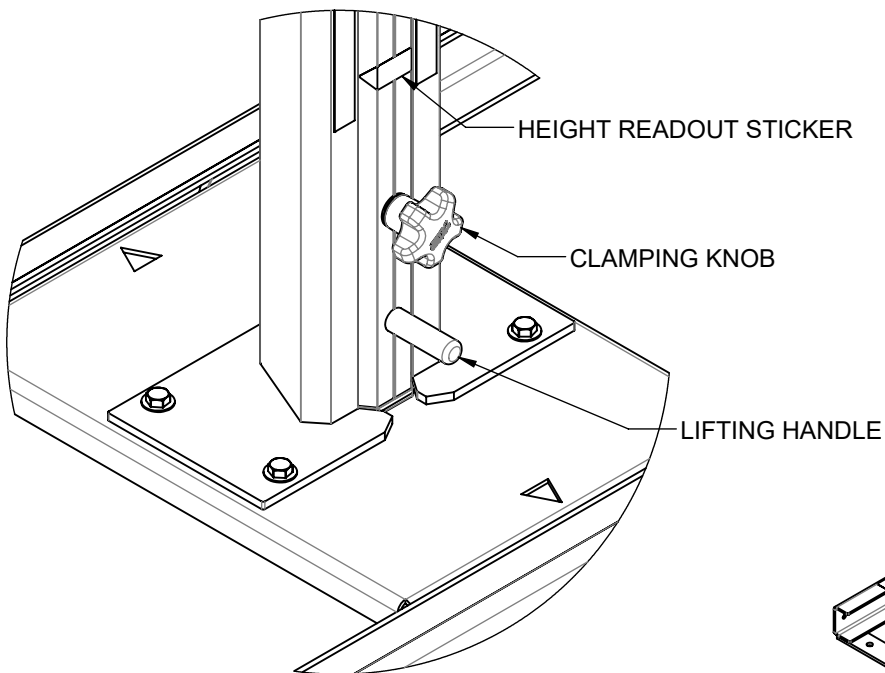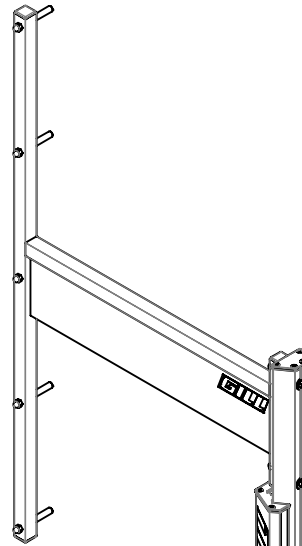




www.gillathletics.com
800-637-3090

S4 POLE VAULT STANDARD INSTALLATION INSTRUCTIONS

| # | Description | QTY. |
|---|---|------|
| 1 | 75mm bar rest pin | 5 |
| 2 | Locking Type Cap Nut - 3/8-16 | 7 |
| 3 | Hex Head Cap Screw - 3/8-16 X 3-1/4 Grade 5 | 2 |

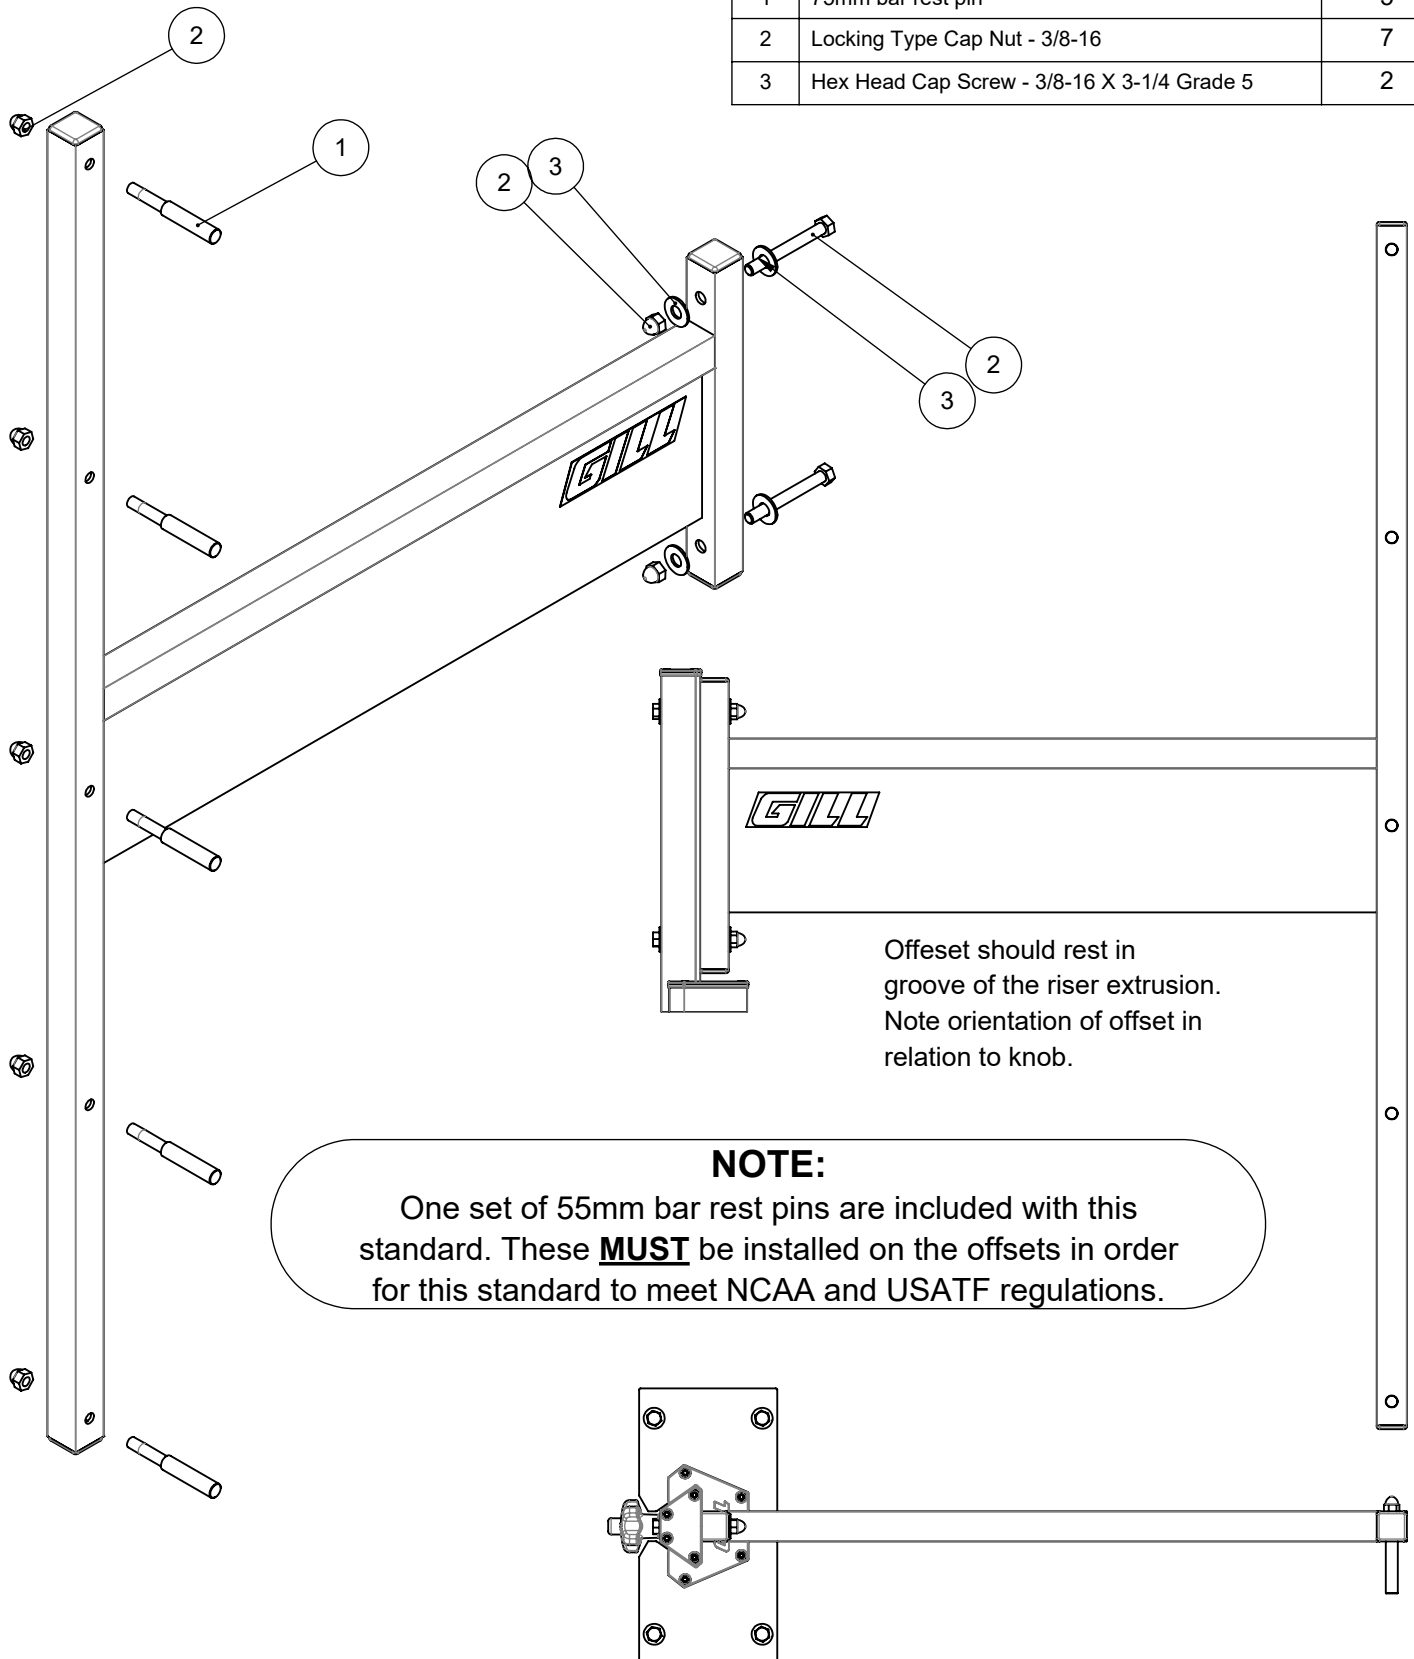




www.gillathletics.com
800-637-3090

S4 POLE VAULT STANDARD INSTALLATION INSTRUCTIONS


| # | Part # | Description | QTY. |
|---|-----------|---|------|
| 1 | REPL00056 | Washer, Flat, 3/8" SAE, .875" OD, .4" ID | 8 |
| 2 | | 3/8"-16 x 1 3/4" Stainless Steel Hex Bolt | 4 |
| 3 | | 3/8"-16 Nylock hex nut, standard height | 4 |

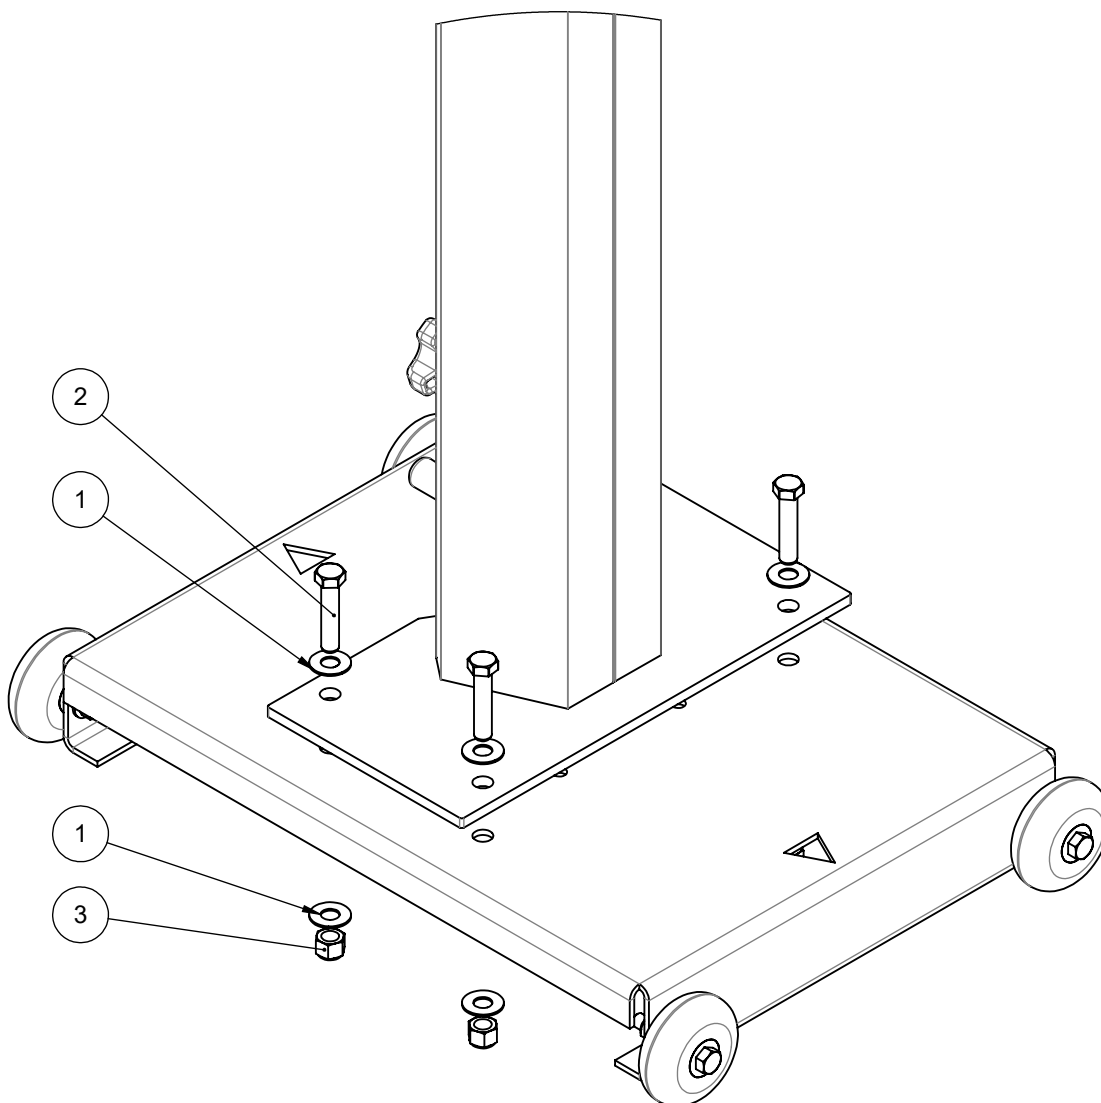



www.gillathletics.com
800-637-3090


S4 POLE VAULT STANDARD INSTALLATION INSTRUCTIONS

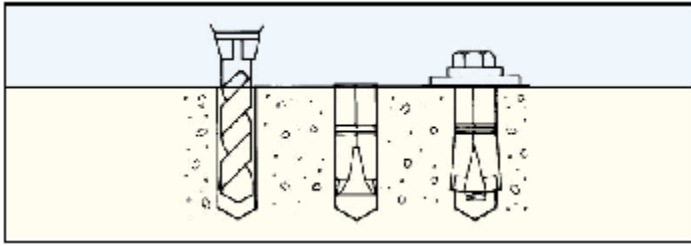


Instructional information from www.mktfastening.com.

Tools Required:

- (1) Drill
- (1) 7/8" Masonry Bit
- (1) Hammer
- (1) 3/4" Wrench or Socket

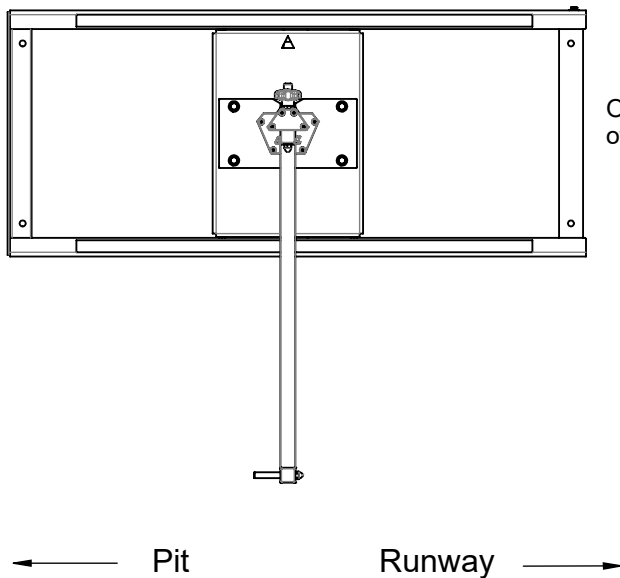

1. Proper alignment of standards is critical before drilling anchor holes. See the next page for more information. After standards have been properly positioned, mark the hole placement.
2. Drill recommended diameter hole to depth of shield.
3. Clean hole of debris.
4. Insert shield in hole threaded end first and tap with hammer for proper positioning.
5. Place base rail back over holes.
6. Insert included 1/2"-13 bolt and 1/2" washer through rails into shield and tighten.

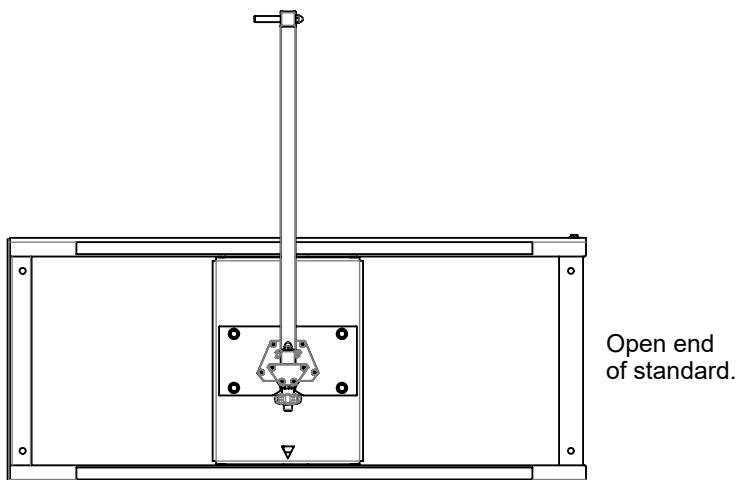

THIS WARNING IS GIVEN IN COMPLIANCE
WITH CALIFORNIA'S PROPOSITION 65:


WARNING

This product contains chemicals known to the
State of California to cause cancer, birth defects
or other reproductive harm.



www.gillathletics.com
800-637-3090

S4 POLE VAULT STANDARD INSTALLATION INSTRUCTIONS

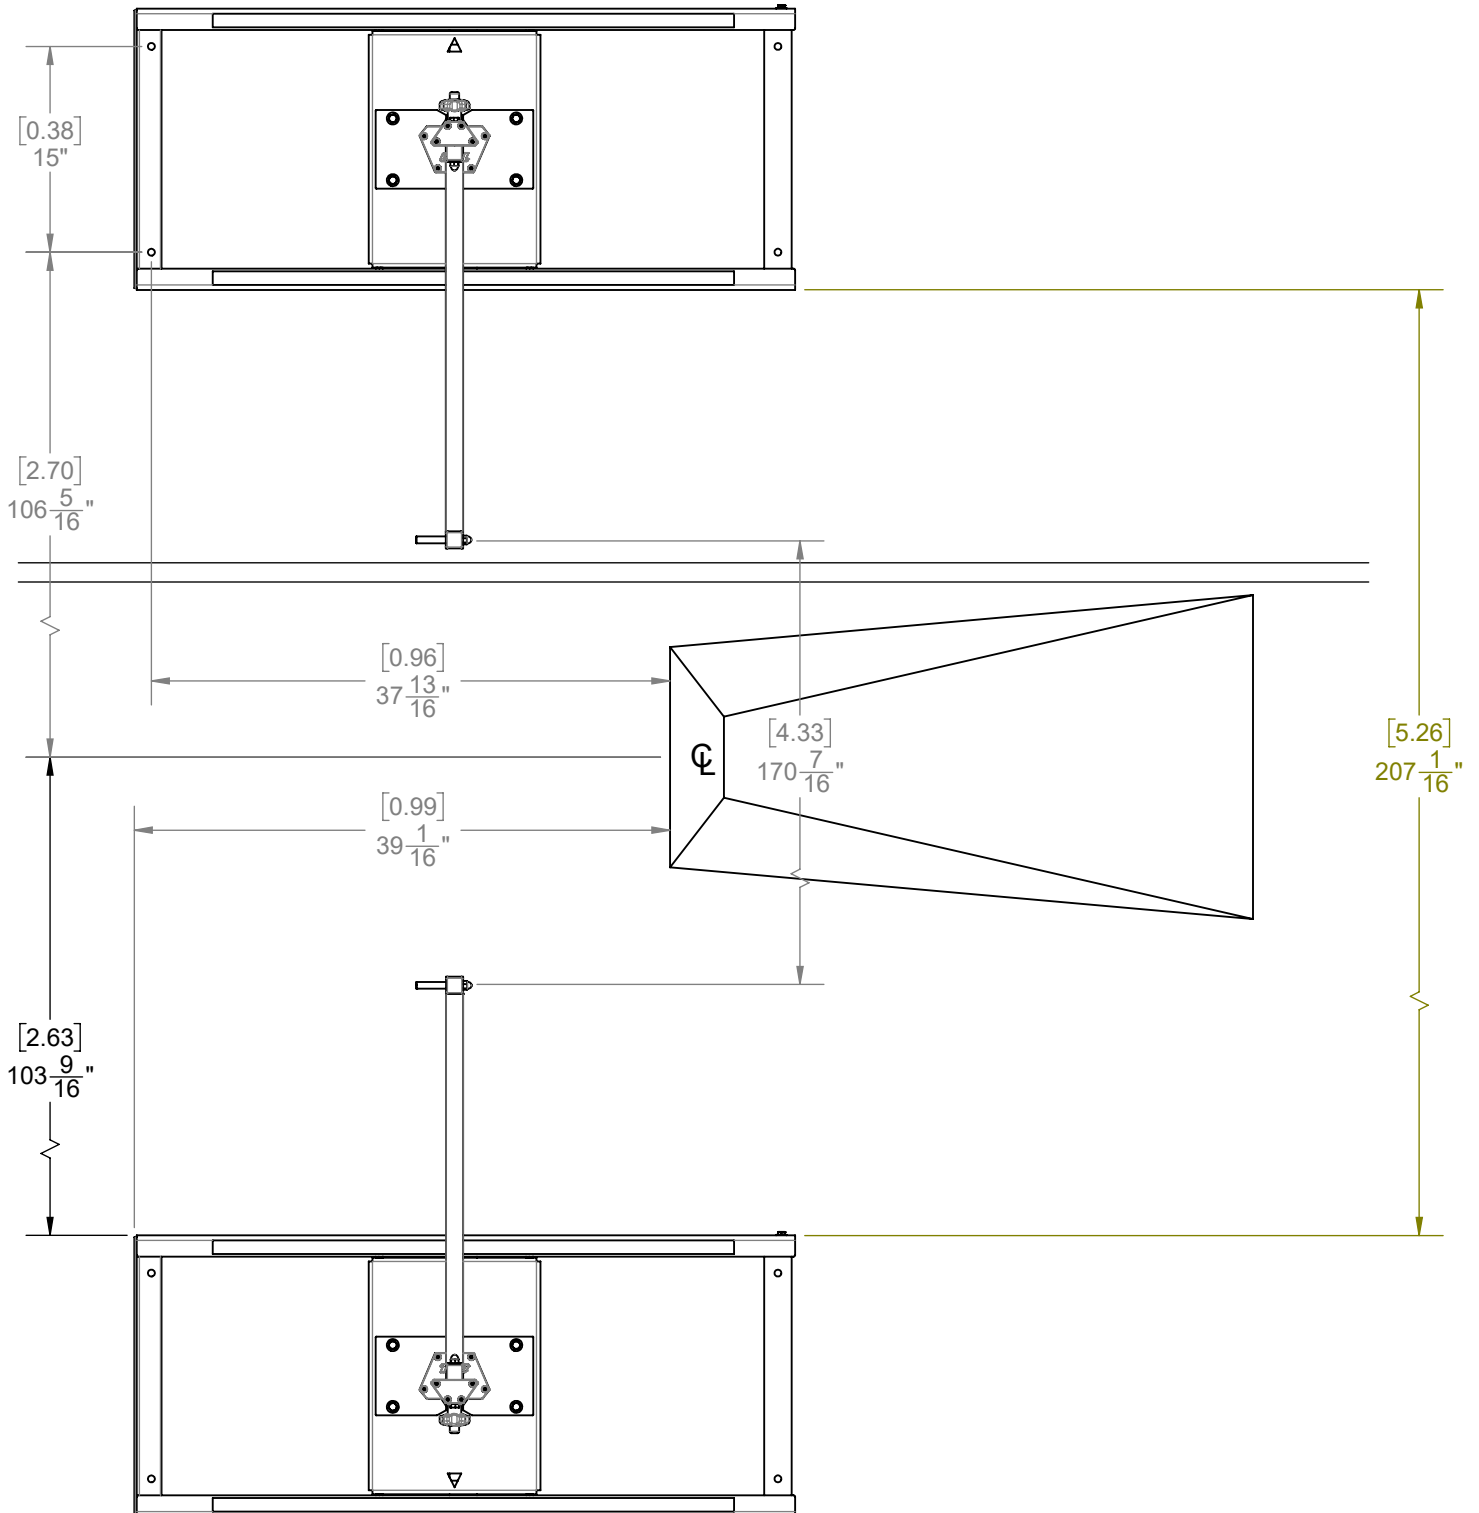



www.gillathletics.com
800-637-3090

S4 POLE VAULT STANDARD INSTALLATION INSTRUCTIONS


HEIGHT DECAL PLACEMENT

AFTER INSTALLING AND LEVELING THE BASES AND UPRIGHTS, THE HEIGHT INDICATOR DECALS NEEDS TO BE APPLIED ONTO THE RISERS.

1. WITH STANDARDS LOWERED TO THE BOTTOM, PLACE A CROSSBAR ON THE TOP PEG.
2. LEVEL THE CROSSBAR. THIS MIGHT REQUIRE RAISING THE RISER ON ONE SIDE SLIGHTLY.
3. AFTER THE CROSSBAR IS LEVEL, MEASURE FROM THE GROUND LEVEL TO THE TOP OF THE CROSSBAR.
4. APPLY THE HEIGHT INDICATOR DECAL ONTO THE RISERS AT THE HEIGHT THE CROSSBAR IS MEASURING TO.

FOR EXAMPLE; IF THE LEVELED CROSSBAR HEIGHT IS AT 10'-11 1/2", PLACE THE INDICATOR DECAL TO POINT TO 10'-11 1/2" MARK OF THE HEIGHT DECALS ON THE UPRIGHT. ENSURE THE INDICATOR DECAL IS APPLIED LEVEL (SEE **DETAIL B**).


NOTE: ALL CROSSBARS HAVE DIFFERENT SAG. WHEN ZERO-ING THE STANDARDS WITH ONE CROSSBAR, THE HEIGHT INDICATOR DECAL MIGHT BE IN THE WRONG LOCATING WHEN USING A DIFFERNT CROSSBAR.

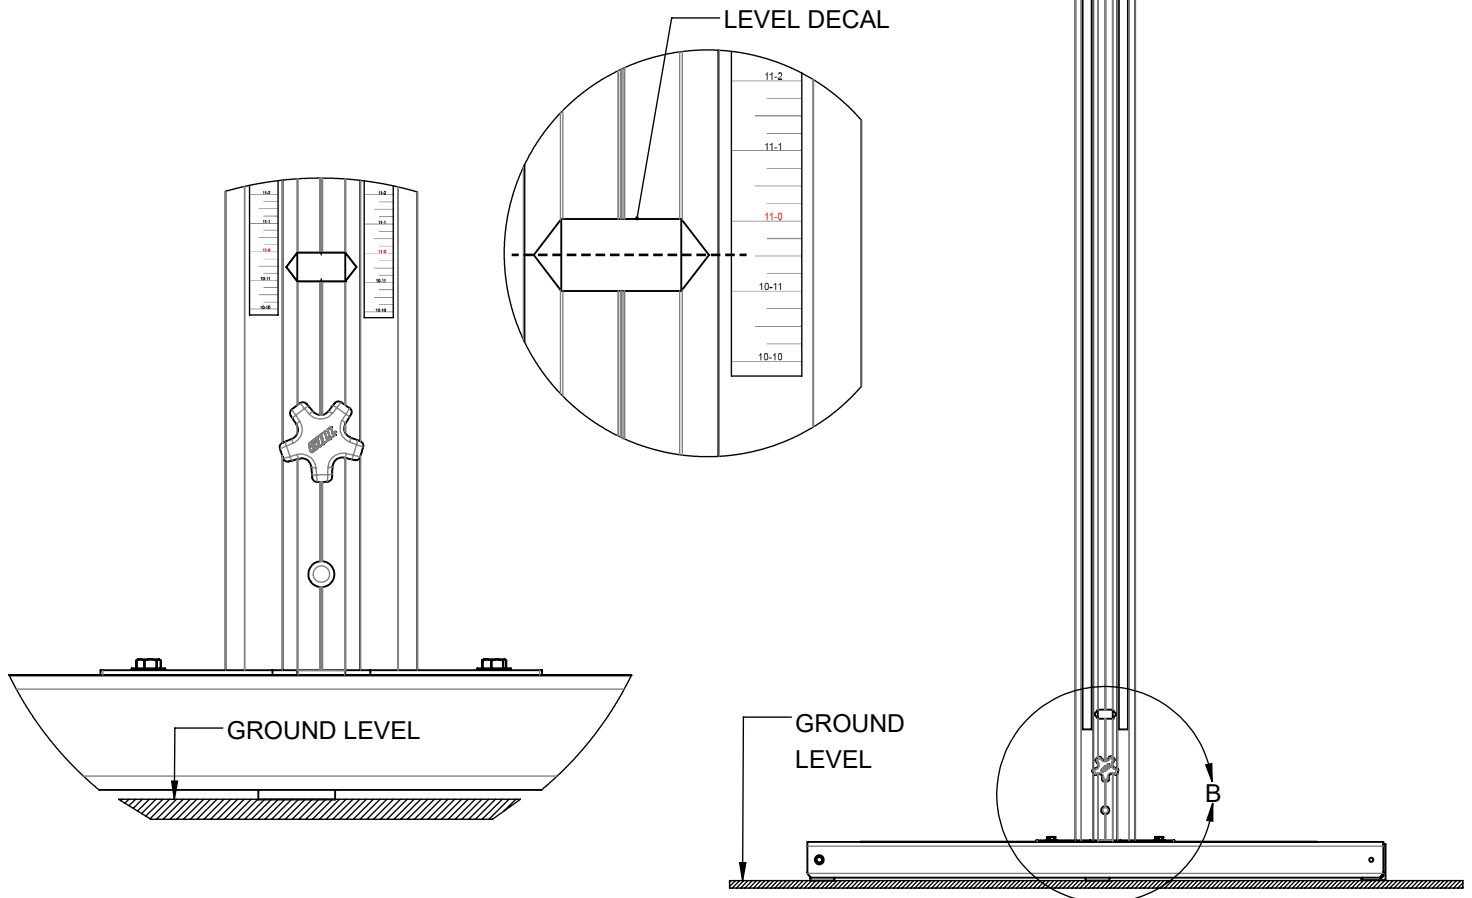




www.gillathletics.com
800-637-3090

S4 POLE VAULT STANDARD INSTALLATION INSTRUCTIONS

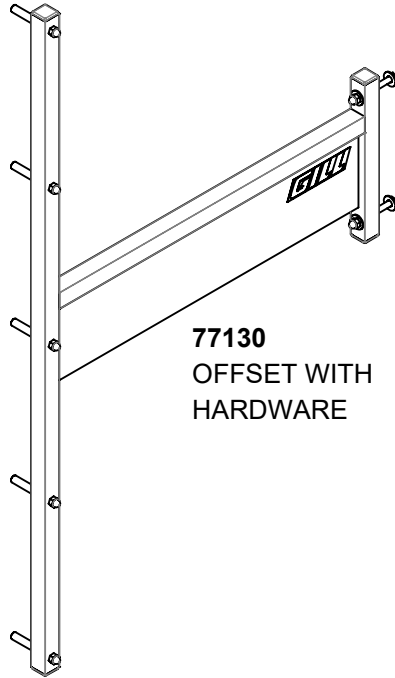

77130
OFFSET WITH
HARDWARE

77150
UPRIGHT/ RISER
ASSEMBLY

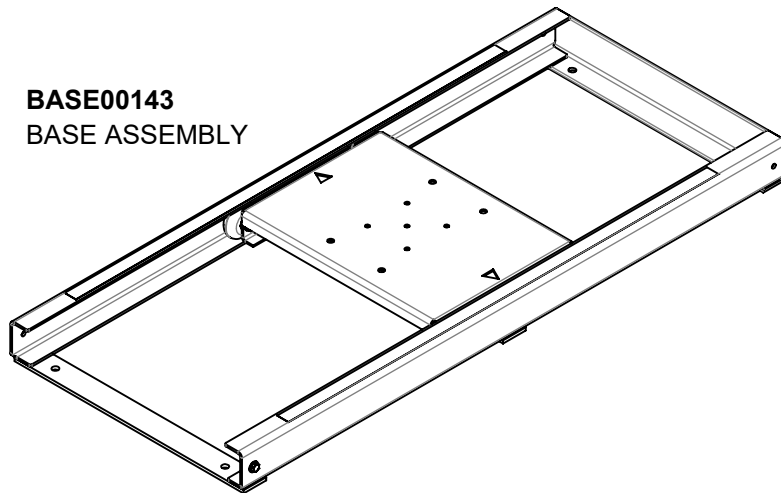

BASE00143
BASE ASSEMBLY

HAND00106
CLAMPING KNOB

