




www.gillathletics.com  
800-637-3090

## 403 - S2 Hurdle ASSEMBLY INSTRUCTIONS

	Description	Qty	Part #	
1	403 Base Leg - Alum	2	40320	
2	Leg Weight 403	2		
3	Crossbrace	1		
4	5/16"-18 x 2" Hex Bolt	4		
5	5/16"-18 Hex Nut	4		
6	403 End Cap	2		
7	Bracket, Gate Tube, Plastic	2		
8	1/4"-20 x 2 3/4" Screw	4		
9	1/4"-20 Nylock Thin Hex Nut	4		
10	41" Gateboard	1		P40346
11	Capped Gate Tube	2		40344
12	Spring Button, Hurdle	2	M1278	

It is recommend that gate board (#9) is attached to gate tubes (#8) with bracket (#10) and screws (#11) before sliding gate tubes onto legs. Tighten nuts (#12) just enough to allow screws to freely turn in gate board.

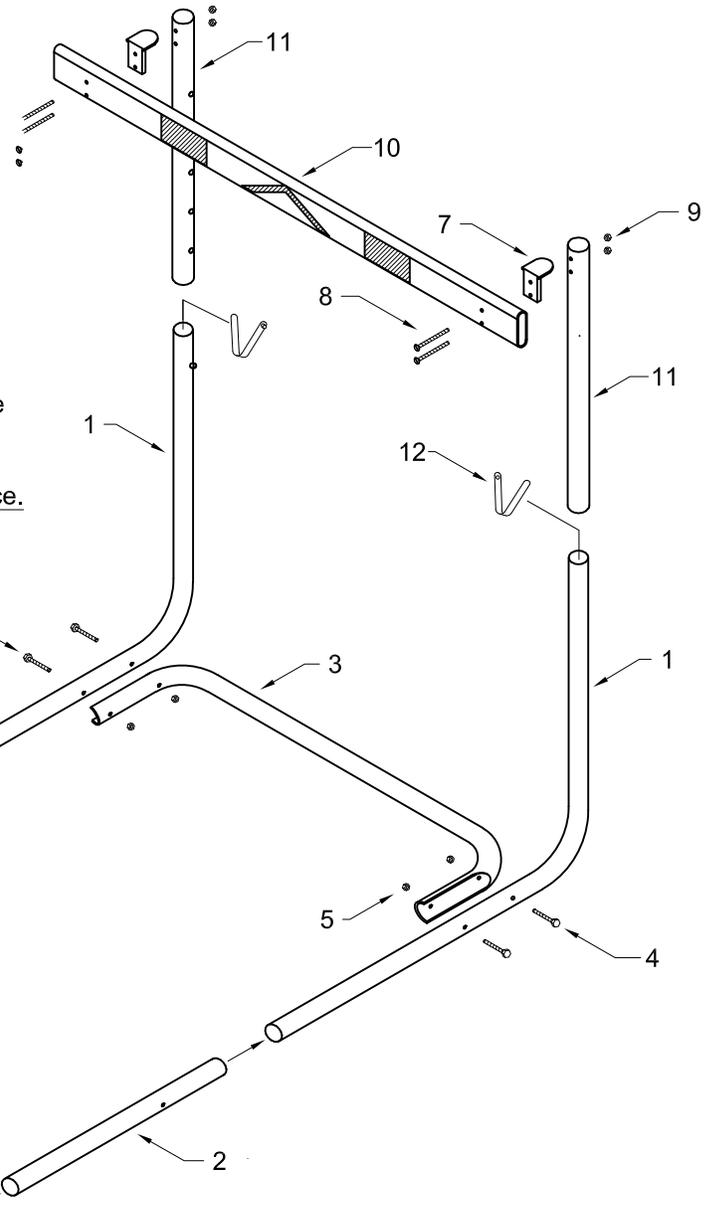

Legs are boxed with leg weights installed and held in place with orange plugs. To remove plastic plugs, insert a bolt (#4) into the opposite side and push the plug out.

Leave the bolt in place while lining the leg up with the crossbrace.

If necessary, remove the bolt and insert it from the other side before bolting the leg to the crossbrace.

Install the spring buttons with spring fold down and buttons facing inward. If the spring buttons are installed with the spring fold up and exposed, they may be dislodged if the gateboard is lowered past the 30" position.

### Tools required:

- 1 x Flat Head Screwdriver
- 1 x 7/16" Wrench
- 2 x 1/2" Wrench

**▲ WARNING:** This product can expose you to Titanium Dioxide, which is known to the State of California to cause cancer. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).