




www.gillathletics.com
800-637-3090


732145 - IAAF 6M STADIUM DISCUS CAGE SPECIFICATIONS

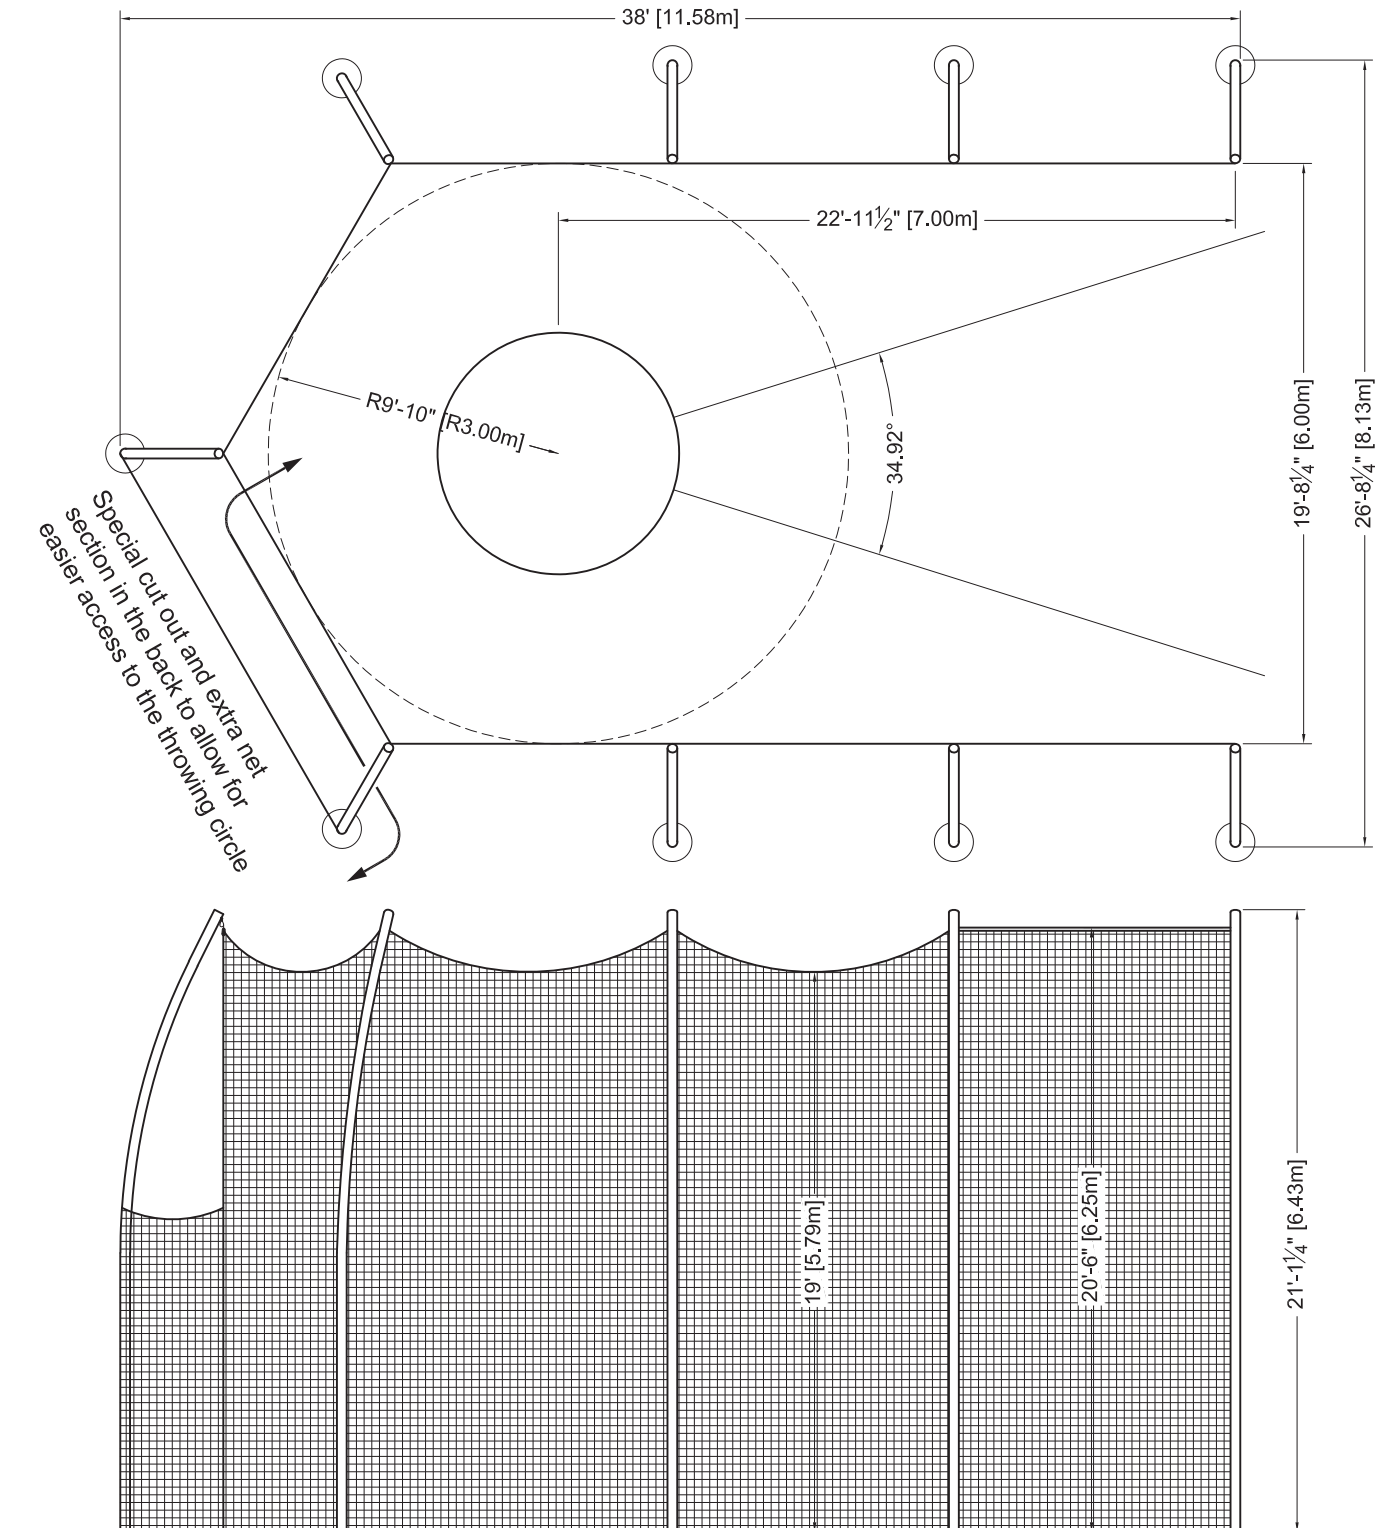

The 732145, IAAF 6m Stadium Discus Cage, consists of nine, 6.4 meter tall, rolled aluminum net poles with ground sleeves and a weather treated nylon net. The poles are 4" OD, 0.226" wall, aluminum tube. Each pole stands in a 1m deep ground sleeve. Galvanized steel tubes support the net between the first two poles on each side. Nine hinged net arms, at ground level, hold the bottom of the net in place. The net is 340 lb. test nylon which has been weather treated for extended service life. The net has a special cut out and extra section in the back to allow for easier access to the throwing circle.

Copyright ©2018 by Gill Athletics. All rights reserved.

GILL ATH
01-10-18
732145_spec




1. Stake out and mark with string the sector center line crossing the circle center. Stake out a second line perpendicular to the sector center line at the circle center. Measure and mark the sleeve centers for each post as shown below.

2. Dig nine 46" [120cm] deep holes at marked locations. The minimum recommended diameter of these holes is 18" [46cm]. Soil conditions at your sight may require larger diameter concrete bases for each pole.

3. Place approximately 6" [15cm] of rock in the bottom of each hole. The rock should support the sleeve at the proper height and allow water in the sleeve to drain away.

4. Mark the hole centers with crossed strings. Set each ground sleeve in place so the top edge is 1/2" [1cm] above the surrounding ground level. Position the sleeves so the poles will face in the directions indicated by the arrows as shown. Note the detail showing the orientation of the sleeve pin to the pole axis arrow. As the sleeves must remain vertical, secure them in place with wire and short sections of rebar.

5. Carefully pour cement around the ground sleeves. Check with a level to ensure sleeves have remained vertical. The concrete should slope away from the top edges of the sleeves to ground level to help keep water and debris out of the sleeves.

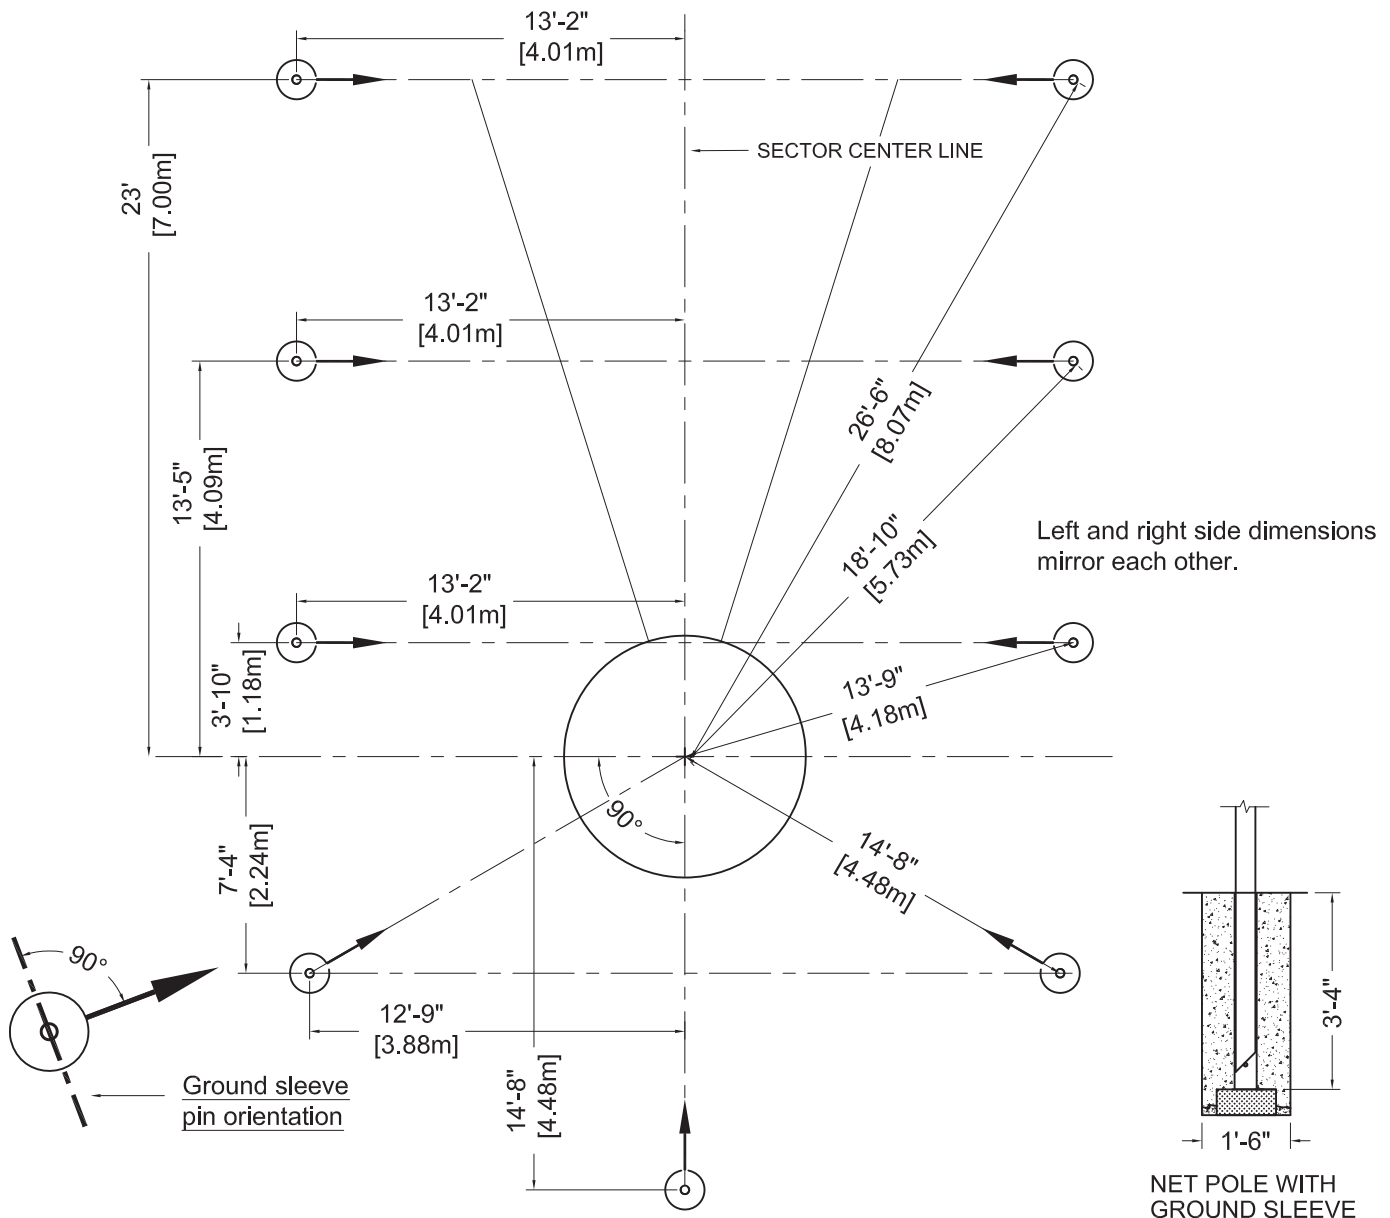

NOTICE: All installations should be conducted by experienced contractors and in accord with all applicable codes, laws and regulations. Suggested instructions herein are illustrative only and should be adapted to suit local requirements. Gill Athletics is not responsible for the manner in which these products are installed.

Copyright ©2017 by Gill Athletics. All rights reserved.

GILL ATH
10-27-17
732145 inst1




www.gillathletics.com
800-637-3090

73210020 - NCAA HAMMER/DISCUS CAGE NET POLE NET POLE INSTALLATION

Install the pipe cap (PCAP00158002)
at the top of the net pole.

Install net pole pulley (73210042) with
 $\frac{5}{16}$ "-18 nylock hex nut (M1254) at the
top of the net pole, install the eyebolt
so the open end of the eye is up.

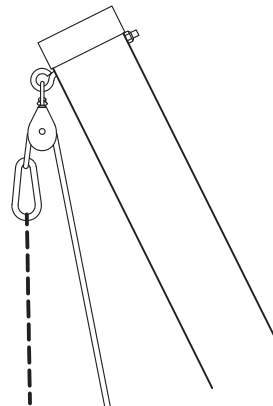


On the two rear most poles only,
install eyebolt (M2745) with nylock
nut (M1254) at hole 11ft from the
ground. These will be used to
secure the rear door flap.

Install eyebolt (M2745) with nylock
nut (M1254) at hole 8ft from the
ground. Hook rubber strap (M733)
between eyebolt and main net.

Install rope cleat (M2244) with nylock nuts
(M1254), $\frac{5}{16}$ " washers (HDWE050020E0)
and $\frac{5}{16}$ "-18 x 6" hex bolts (HDWE01314).

Install net flip arms (73210043) at ground level on
each net pole with u-bolt (M2298), washers
(M2263), and $\frac{1}{2}$ "-13 nuts (HDWE030030E0). Clip
the rope edge of the net to the end of the net arm.

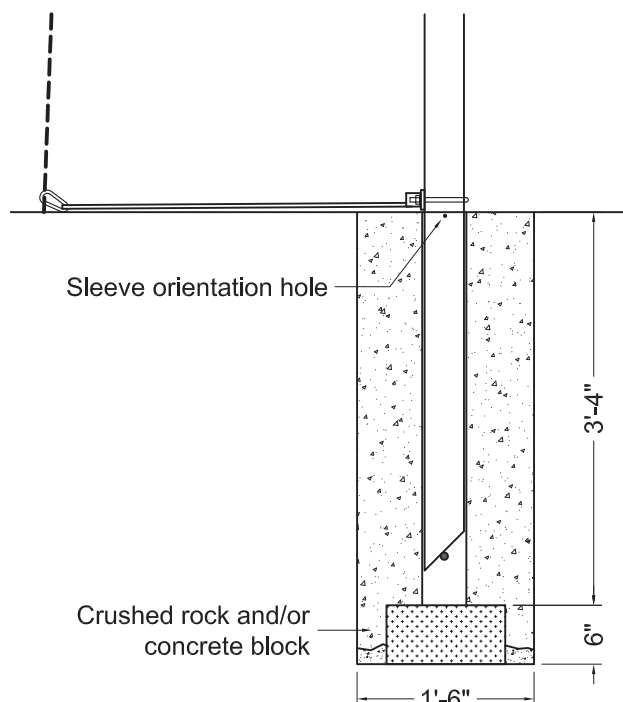

Ground Sleeve Caps are
available but sold separately.

Works with Ground Sleeve Cap
#73119021

← Center of Cage



www.gillathletics.com
800-637-3090

732145 - IAAF 6M DISCUS CAGE NET INSTALLATION


1. To minimize sag between the first two poles, the net is supported by a galvanized steel support tube on each side. To install the tube, attach a short 1/4" eyebolt (M27711) with a nylock hex nut (M1290) at one end of each tube. At the top corner of the net, weave the tube in and out through every 4th net opening just below the top edge of the net. The installed eyebolt should now be even with the corner of the net. Install the second eyebolt in each tube.

2. To ensure the net is evenly spaced when it is installed, mark each hook position on the net according to the diagram below. Stretch the net out flat and stake one upper corner to the ground along with the end of a 100 ft. long measuring tape. Stretch the net and tape to 82' [25m] and stake the corner to hold it's position next to the tape. Mark the top of net and the cable at the dimensions shown.

4. Lay out the net inside the cage poles with each marked position next to the appropriate net rope hook. At each position hook both the net binding and the cable. At each end be sure the hook is through the cable loop.

5. Install the rear net support tube between the two poles indicated in the drawing. The tube is installed in the same fashion as the front two support tubes and is meant to support the net above the rear entry cut out.


6. Raise the net to the top of the poles and tie off the ropes. Hook the bottom of the net to the flip arms. A sand bag or other weight can be placed on the arm to increase the arms resistance. The bottom 6" of the net is supposed to lay on the ground to help trap a discus.

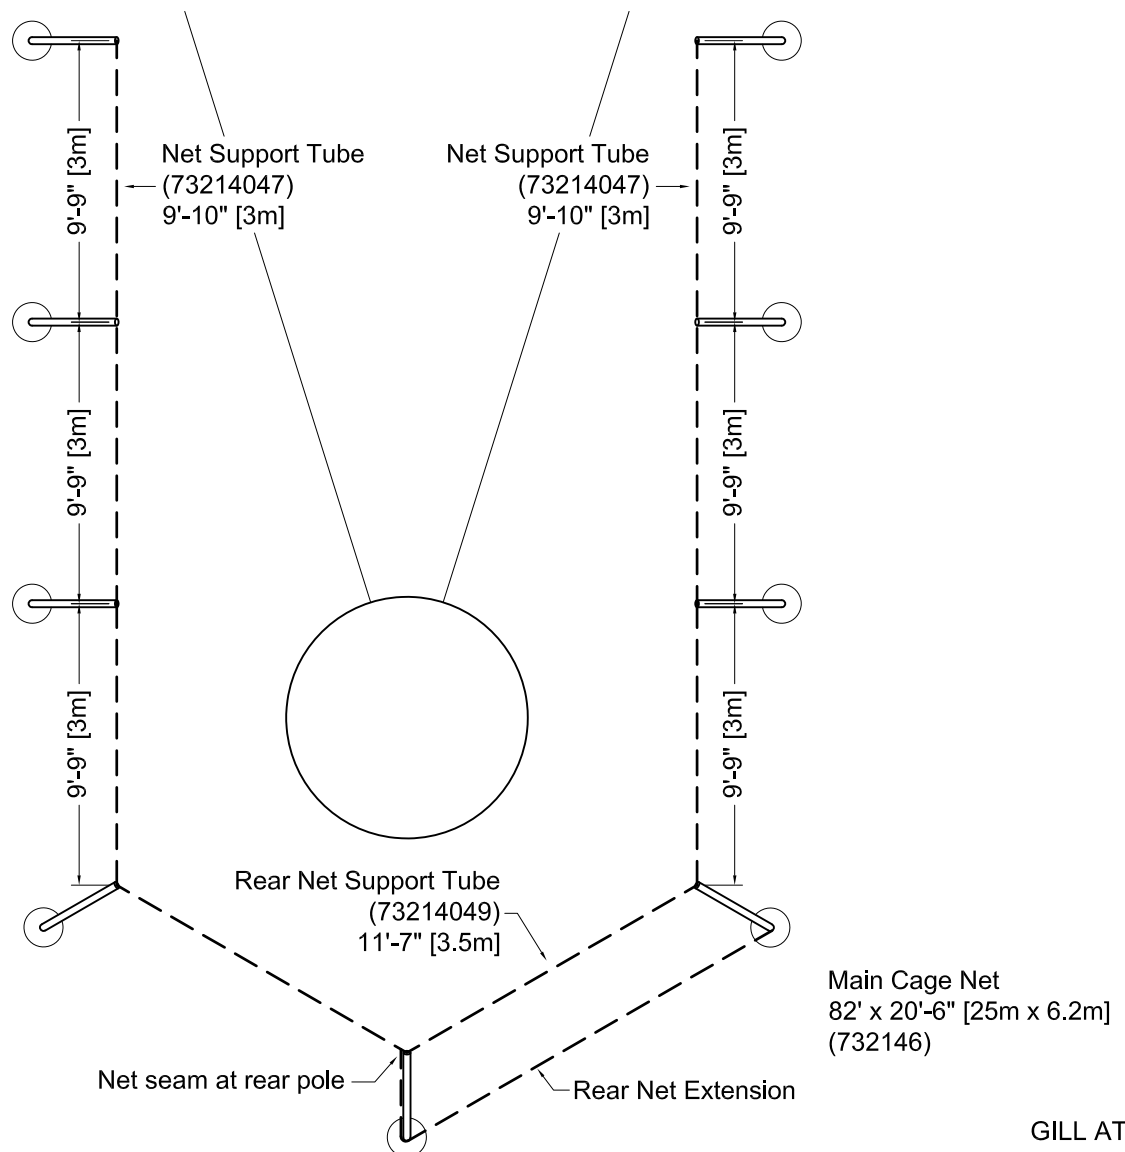



www.gillathletics.com
800-637-3090

732145 - IAAF 6M DISCUS CAGE NET INSTALLATION

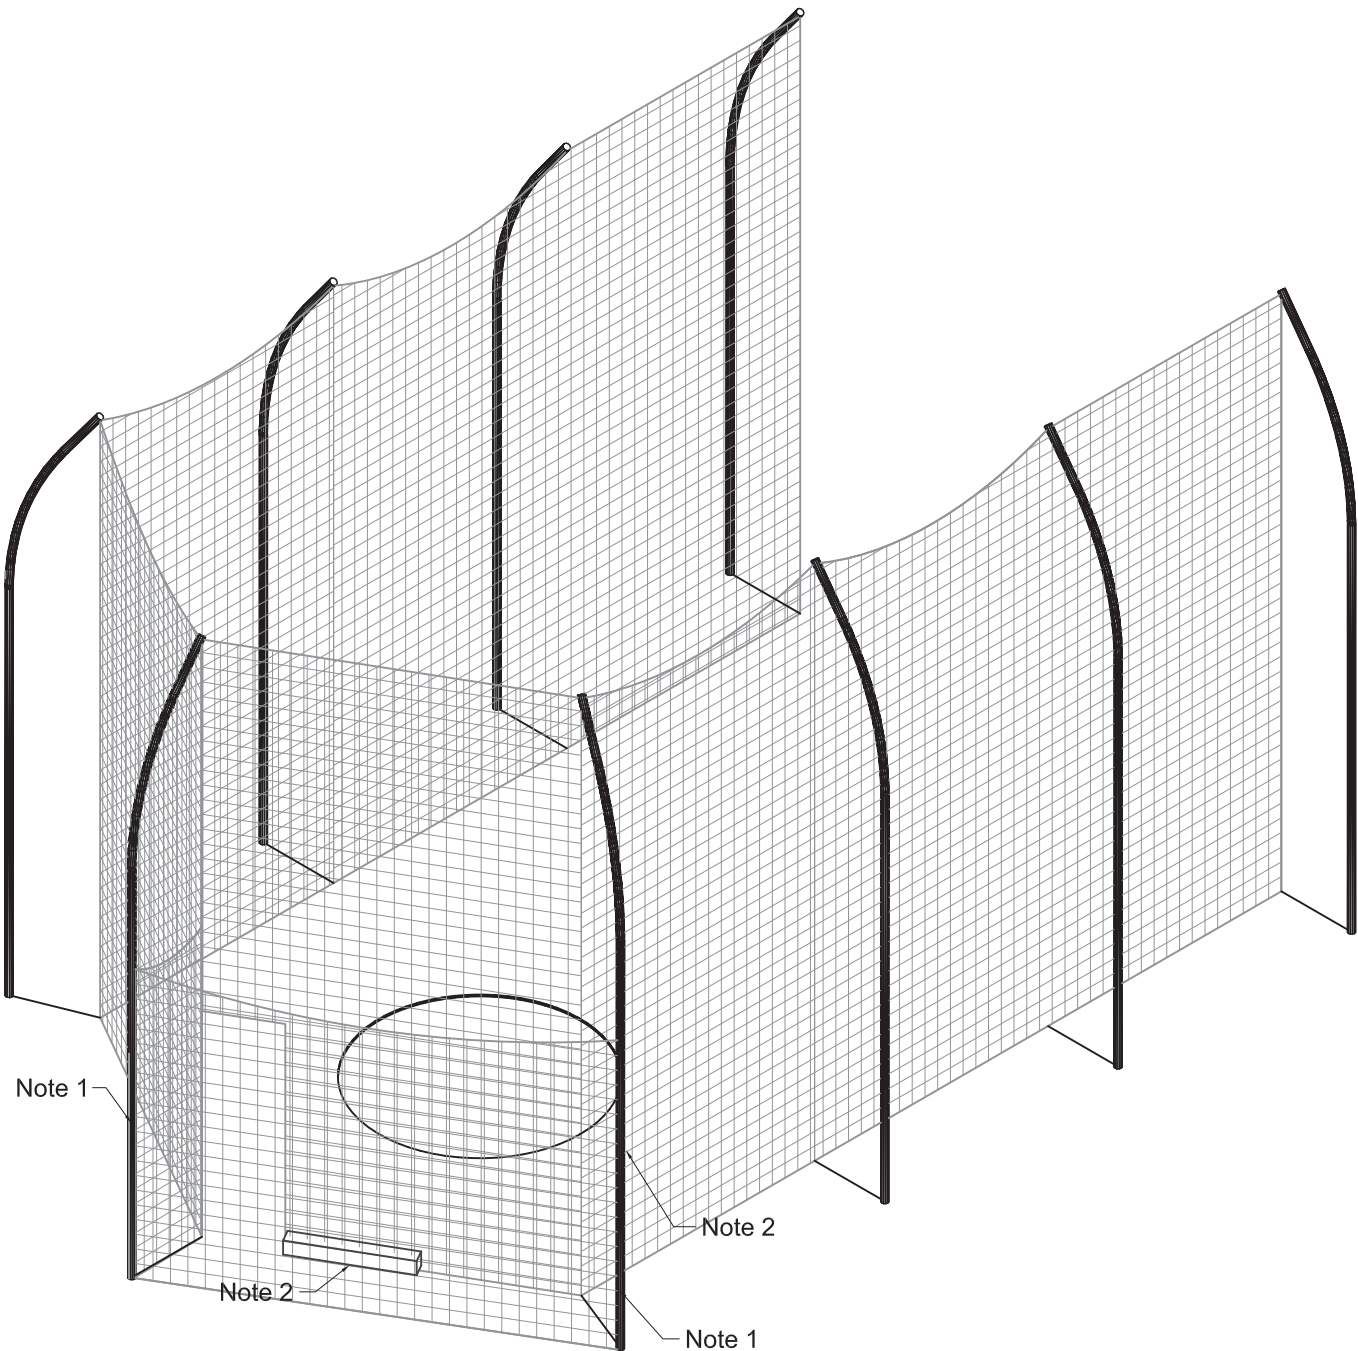

NOTES:

1. Wrap the rear access net extension around the outside of the two rear most net poles. Hook the net to the poles at the eyebolt 11ft from the ground.
2. Lace the entire end of the net extension to this pole using rope.
3. Clip the door flap weight (73210050) to the bottom net edge rope next to the entry way to keep the net from moving in the wind.

WARNING: This product can expose you to Titanium Dioxide, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.


suggestions@gillathletics.com

Copyright ©2018 by Gill Athletics. All rights reserved.

GILL ATH
01-10-18
732145_net2

For the protection of athletes, spectators, and coaches install warning signs according to the diagram below.

Attach signs (M2322) to the cage net with the included 1.25" rings (M1250) in each corner. Signs should face away from the cage toward spectators.

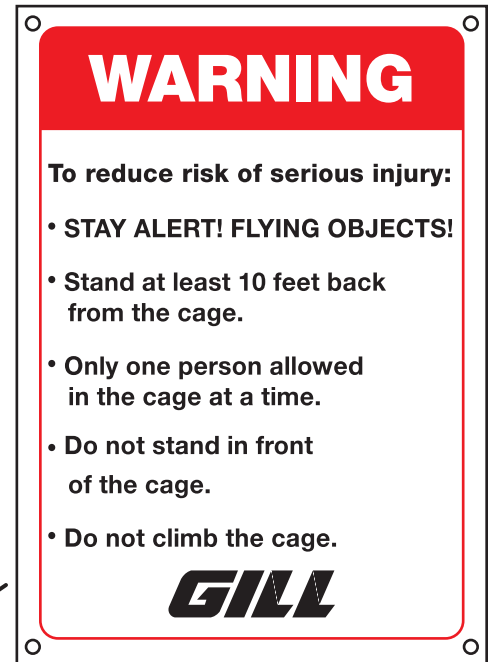

Center Back: Attach sign to the outside of the net at eye level in the middle of the back of the cage.



Left Front Side: Attach sign to the outside of the net at eye level near the front left side of the cage.



Right Front Side: Attach sign to the outside of the net at eye level near the front right side of the cage.







www.gillathletics.com
800-637-3090

732145 - IAAF 6M STADIUM DISCUS CAGE SHIP LIST


Main Net
732146
x1

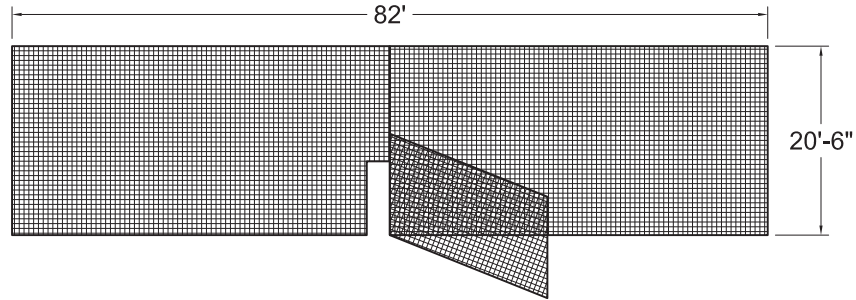


Aluminum Net Pole
73210020
x9

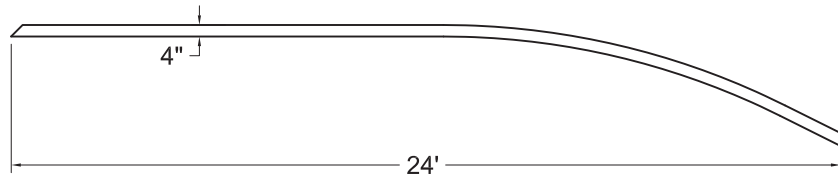


Steel Net Support Tube
73214047
x2




Steel Rear Net Support Tube
73214049
x1



Steel Ground Sleeve
73210015
x9

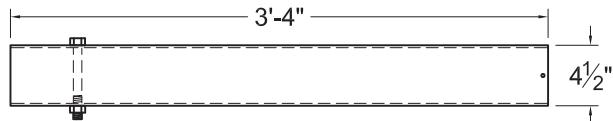

Door Flap Weight
73210050
x1



Cage Components Box - 73214540

Warning Sign
M2322
x3

Snap Ring
M1250
x12




Pipe Caps
PCAP00158002
x9



1/4" Polyester Rope
M2005
x450ft

Net Arm
73210043
x9



HARDWARE BAG x 1:		
QTY.	M#	DESCRIPTION
38	M1254	5/16"-18 Nylock Hex Nut
9	73210042	Pulley & Eyebolt Assembly
11	M2745	5/16"-18 x 5" Eyebolt
11	M2223	3/8" Snap Hook
6	M27711	1/4"-20 x 1 1/2" Eyebolt
6	M1290	1/4"-20 Nylock Hex Nut
9	M2244	Galvanized 8" Rope Cleat
18	HDWE01314	5/8"-18 x 6" Hex Head Cap Screw
18	HDWE050020E0	3/8" Flat Washer