

IAAF/NCAA Implement Certification Kit

All gauges, excluding indoor weight gauge, are laser cut stainless steel for extreme accuracy and permanency. Meets new 2007 rule updates.

Kit Includes:

93020	20K scale	93043	Javelin Balance Gauge
93021	Scale Ring	93045	1.0K Discus Gauge
93040	Hammer Length and Center of Gravity Gauge	93049	2.0K Discus Gauge
930422	Javelin Grip Gauge	93030	4K Shot Gauge
930421	Javelin Tip Gauge	93032	16lb Shot Gauge
930441	Javelin Diameter Chart	93036	Indoor Shot Max Gauge
93044	Digital Caliper		




Discus and shot gauges feature a tab system for easy identification.



20K scale and ring simplify weight measurements.

WARNING: This product can expose you to Urethane, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



Copyright © 2013 by Gill Athletics. All rights reserved.




www.gillathletics.com
800-637-3090

93090 - HAMMER LENGTH GAUGE CUSTOMER INSTRUCTIONS


Assembly Instructions

1. Unscrew the four screws of the Center Section
2. Lift Flat Bar up and slide Front and Rear Sections against the Mid Section.
3. Place Threaded Clamping Plate so that it is centered between two sections (see **Detail A**).
4. Place Flat Bar back onto the Center Section and align all four holes with the holes of the Threaded Clamping Plate.
5. Insert the four screws and tighten them

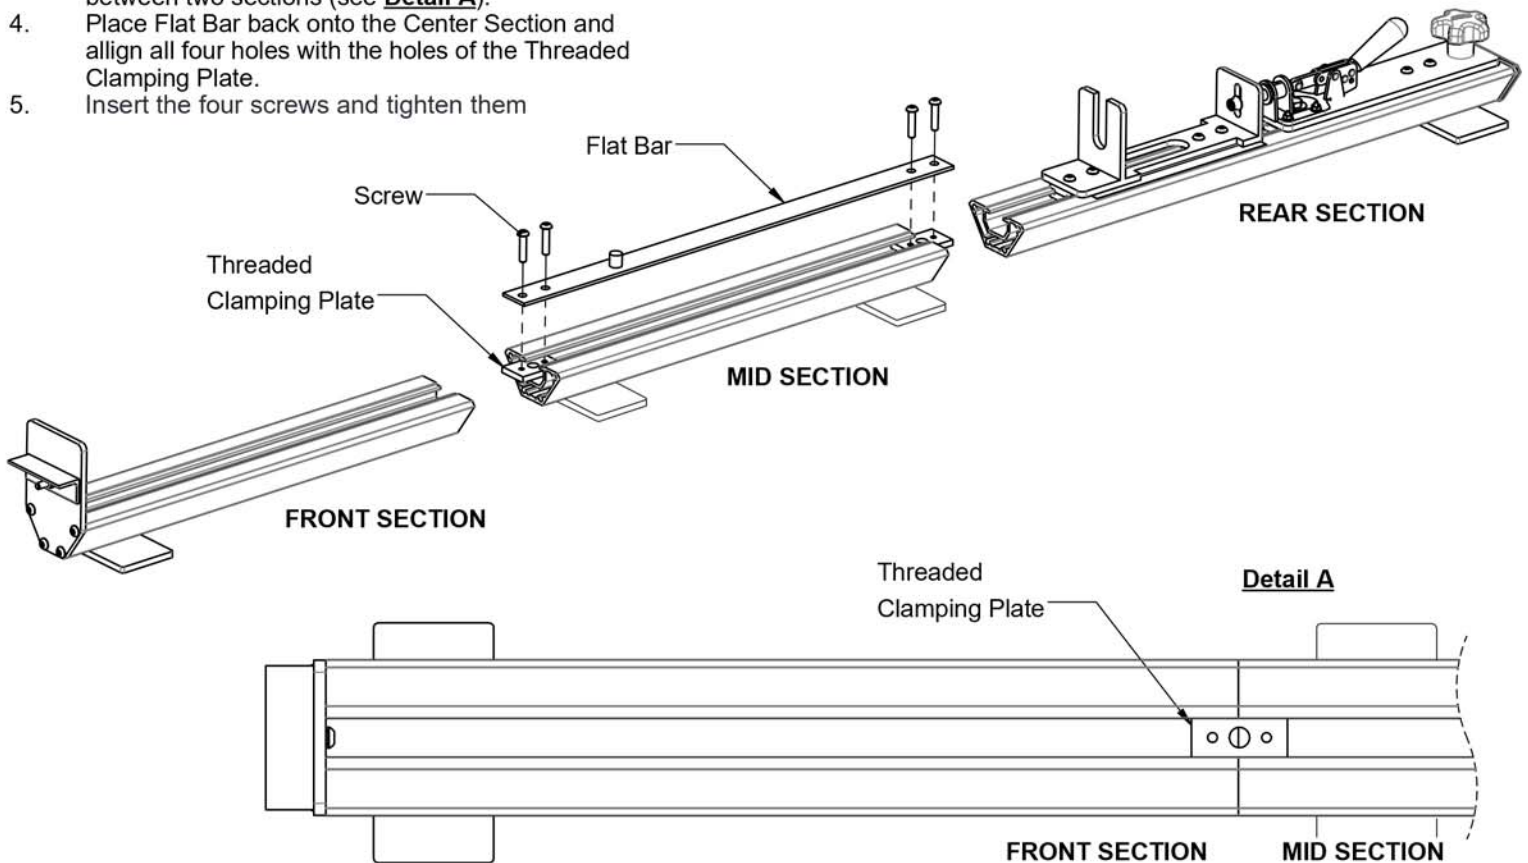

Included in the Product:

- Hammer Length Gauge
- Two C-Clamps
- Read-out Bracket
- Soft Carrying Case

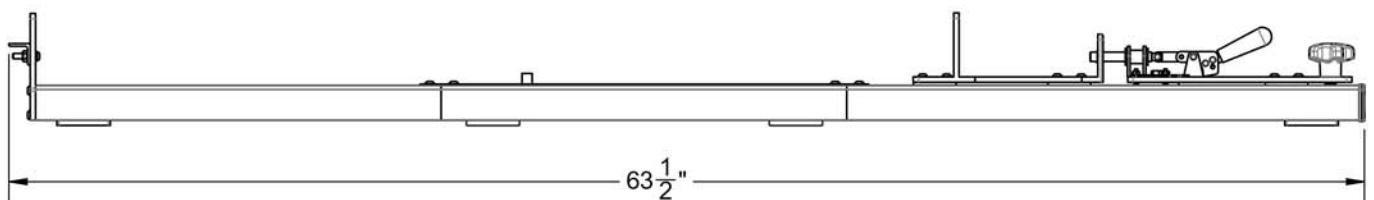




www.gillathletics.com
800-637-3090


93090 - HAMMER LENGTH GAUGE CUSTOMER INSTRUCTIONS

Setup & Use Instructions


1. Place Hammer Gauge onto flat and level surface
2. Clamp Gauge to the table using provided C-Clamps

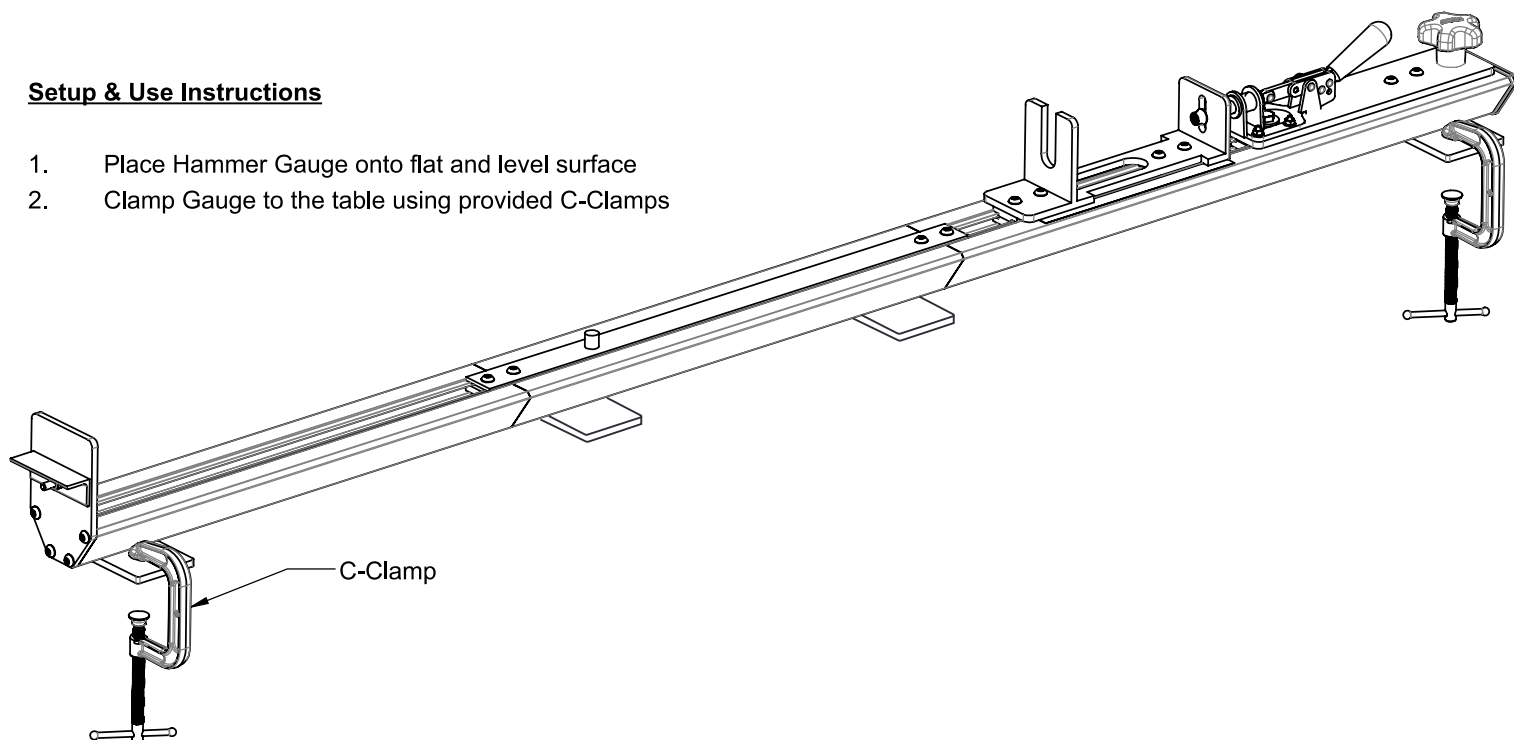

3. Place Hammer Ball onto Sled Assembly
4. Loop Handle over Handle Bracket
5. Slide Sled Assembly to stretch the Hammer Wire

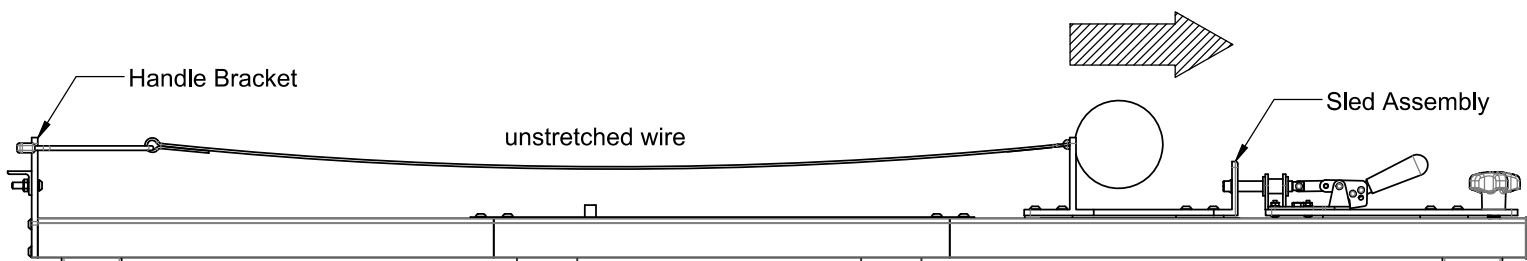


6. Tighten the Clamping Knob
7. Flip Toggle Clamp Handle up
Ensure Hammer Wire is stretched straight when
Toggle Clamp is engaged (flipped up).

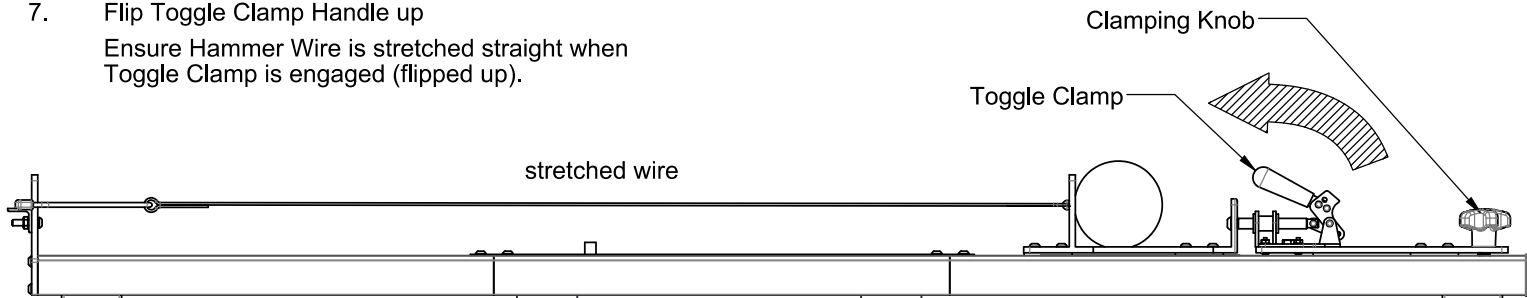





www.gillathletics.com
800-637-3090


93090 - HAMMER LENGTH GAUGE CUSTOMER INSTRUCTIONS

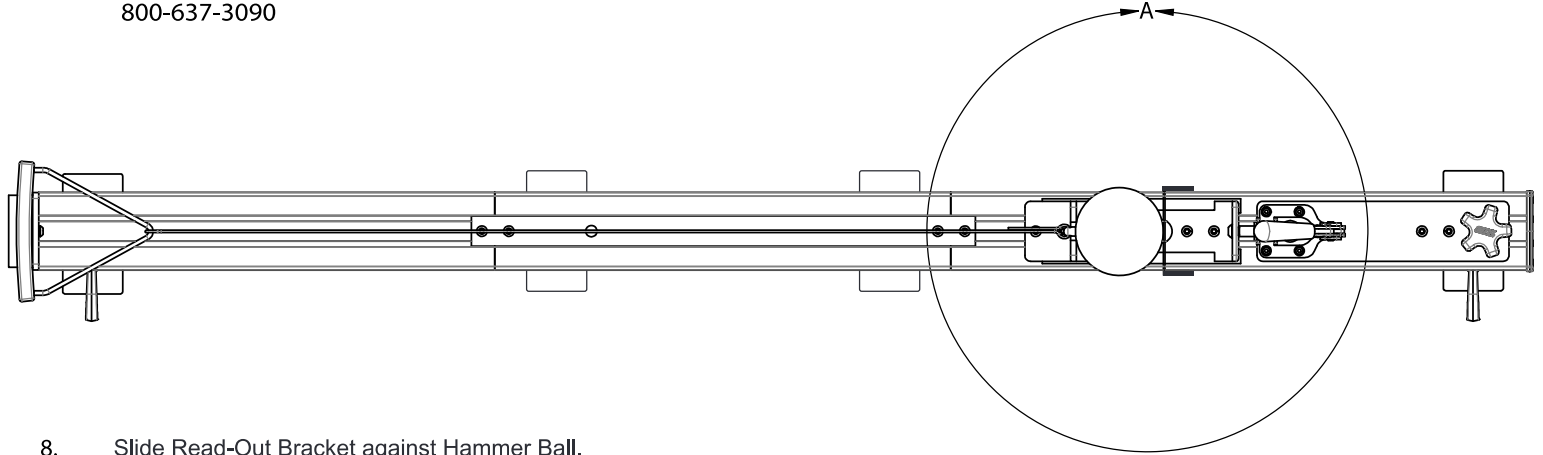


8. Slide Read-Out Bracket against Hammer Ball.
Ensure Bracket is perpendicular to the Hammer Gauge.
Standing directly over the Hammer Ball and Read-out Bracket, find where the inside of the Read-out Bracket meets the Ruler Label.

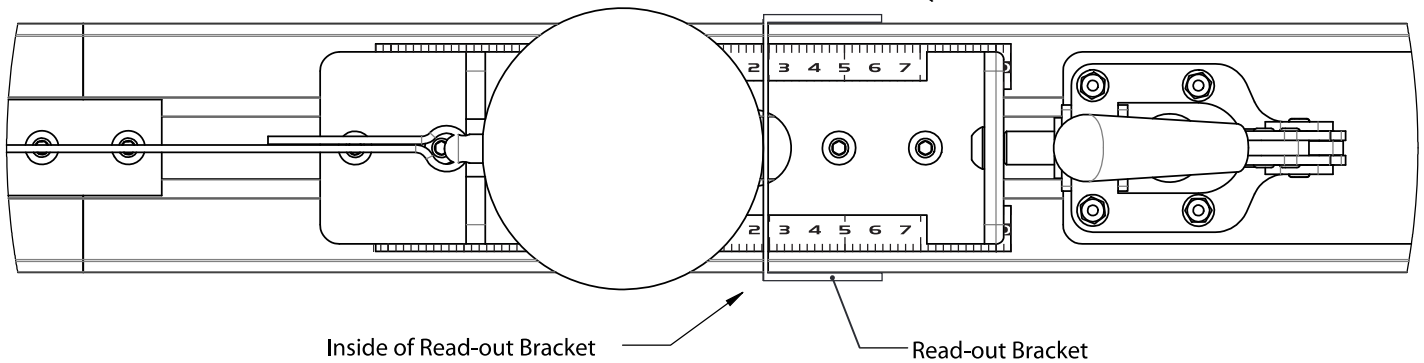

9. Check the Balance of the Hammer Ball by using the provided Center of Gravity Checker.

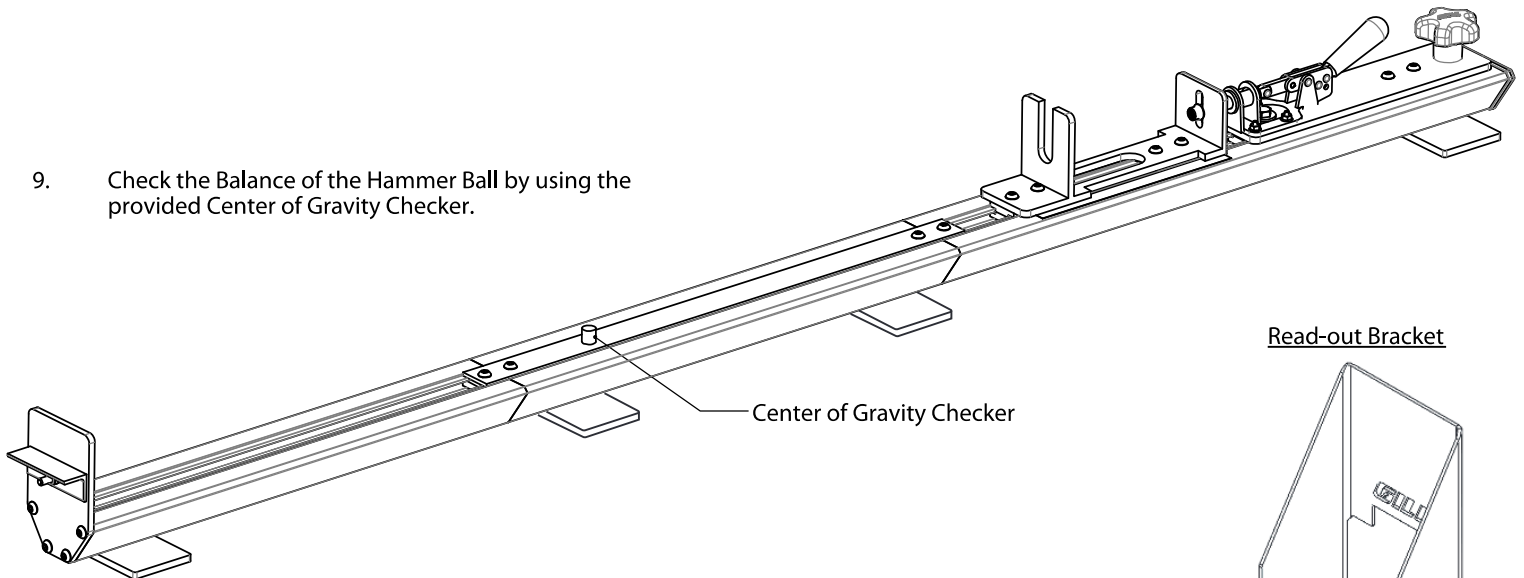

Read-out Bracket





www.gillathletics.com
800-637-3090

93090 - HAMMER LENGTH GAUGE CUSTOMER ASSEMBLY INSTRUCTIONS

SAFETY INSTRUCTIONS

- Read all instructions before use to avoid injury.
- Improper use of product can result in serious injury.
- Read all product safety labels.
- Keep this instruction manual for future reference.

WARNING

Equipment can fall and cause injury.
Clamping the gauge to a solid surface is recommended.

Implement can fall and cause injury.

NOTICE

Product Damage can occur when the equipment is not used or stored properly.

Hammer Gauge might not work properly if damage occurs.

Customer Notes: _____

 **WARNING:** This product can expose you to Titanium Dioxide, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

E