



*It's What the Pros Play On!®*

## ASSEMBLY INSTRUCTIONS

### *LACROSSE GOALS* *No. 261100 Portable* *No. 262100 Stationary*

#### **WARNING**

READ ALL WARNINGS THOROUGHLY BEFORE USING THIS EQUIPMENT.

FAILURE TO COMPLY WITH THE FOLLOWING INSTRUCTIONS AND WARNINGS MAY RESULT IN SERIOUS INJURIES AND/OR PROPERTY DAMAGE.

- Unsecured portable lacrosse goals can fall or tip over causing serious injuries or even death.
- Securely anchor portable lacrosse goals at ALL times.
- Remove nets when goals are not in use.
- Use extreme caution when moving goals. Portable lacrosse goals should be moved only by authorized personnel familiar with, and physically capable of moving these goals.
- Check all components for structural integrity. Replace damaged components immediately.
- Check all connecting hardware before every use. Replace damaged or missing fasteners immediately.
- Fully disassemble goals for seasonal storage.
- Do not use or store goals on a sloped surface.
- **NEVER CLIMB ON GOALS.**

THE OWNER OF THIS EQUIPMENT IS RESPONSIBLE TO ENSURE THAT ALL INDIVIDUALS FOLLOW THE SAFETY AND OPERATING INSTRUCTIONS TO AVOID INJURIES OR PROPERTY DAMAGE. PROPER USE AND SUPERVISION OF THIS EQUIPMENT IS ESSENTIAL TO HELP REDUCE THE POSSIBILITY OF ACCIDENTS OR INJURIES.

#### **WARNING**

READ ALL INSTRUCTIONS THOROUGHLY BEFORE ATTEMPTING TO ASSEMBLE THIS EQUIPMENT. ASSEMBLY OF THIS EQUIPMENT MUST BE DONE BY PHYSICALLY CAPABLE ADULTS ONLY.

#### PARTS LIST (For PAIR of Goals)

##### *261100 PORTABLE LACROSSE GOAL – See Page 2*

Item #	Qty.	Part Number	Description
1	2	FRME 261 01 7	Crossbar
2	4	FRME 261 02 7	Post
3	8	HDWE 09017 0E0	3/8" x 1/2" Lg. Set Screw
4	4	PCAP 00067 002	Inside Cap Plug
5	2	NETS 00033 000	Net with Lacing Cord
6	18	ANCR 00040 0E0	Tie-Down Stake ♦
7	4	FRME 261 03 7	Base
8	2	HDWE 01101 0E0	1/2" x 1-1/2" Lg. Hex Head Cap Screw
9	2	HDWE 03008 0E0	1/2" Locking Cap Nut

##### *262100 STATIONARY LACROSSE GOAL – See Pages 3 and 4*

Item #	Qty.	Part Number	Description
1	2	FRME 261 01 7	Crossbar
2	4	FRME 262 02 7	Post
3	4	HDWE 09017 0E0	3/8" x 1/2" Lg. Set Screw
4	4	PCAP 00067 002	Inside Cap Plug
5	2	NETS 00033 000	Net with Lacing Cord
6	14	ANCR 000400E0	Tie-Down Stake ♦♦

- ♦ Tie-down stakes provided to secure net to ground (7 per goal), and to secure goal to ground (2 per goal).
- ♦♦ Tie-down stakes provided to secure net to ground (7 per goal).


Upon completion of the assembly/installation of these goals, make sure this instruction manual is on the possession of the owner or facility manager, to save for future reference, and to order replacement parts.

# No. 261100 PORTABLE LACROSSE GOAL

1. Check all items against Parts List on Page 1 to ensure all have been included.



2. Assemble base sections as shown in Detail "A".

3. Insert inside cap plugs into each end of crossbar. See Detail "B".

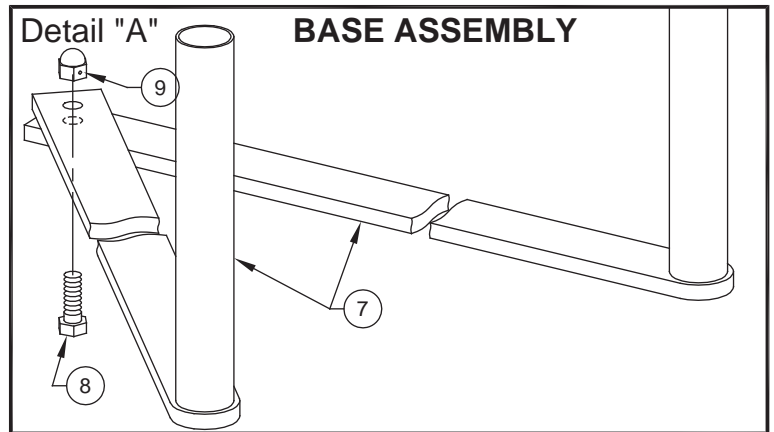

4. Assemble posts to base sections. Assemble crossbar to posts. Note – orient posts and crossbar so that attachment hardware is toward the rear of the goal. See Detail "B". Tighten all set screws.

5. The assembled goals must be secured to the ground using the tie-down stakes provided. Each base section contains a slot for a tie-down stake. Locate the portable lacrosse goals in their final position on the playing field, and drive a tie-down stake thru each slot (two per goal) to secure them to the ground. See Detail "C".

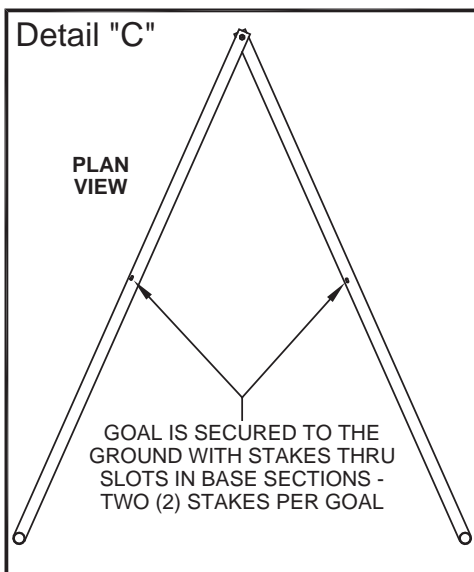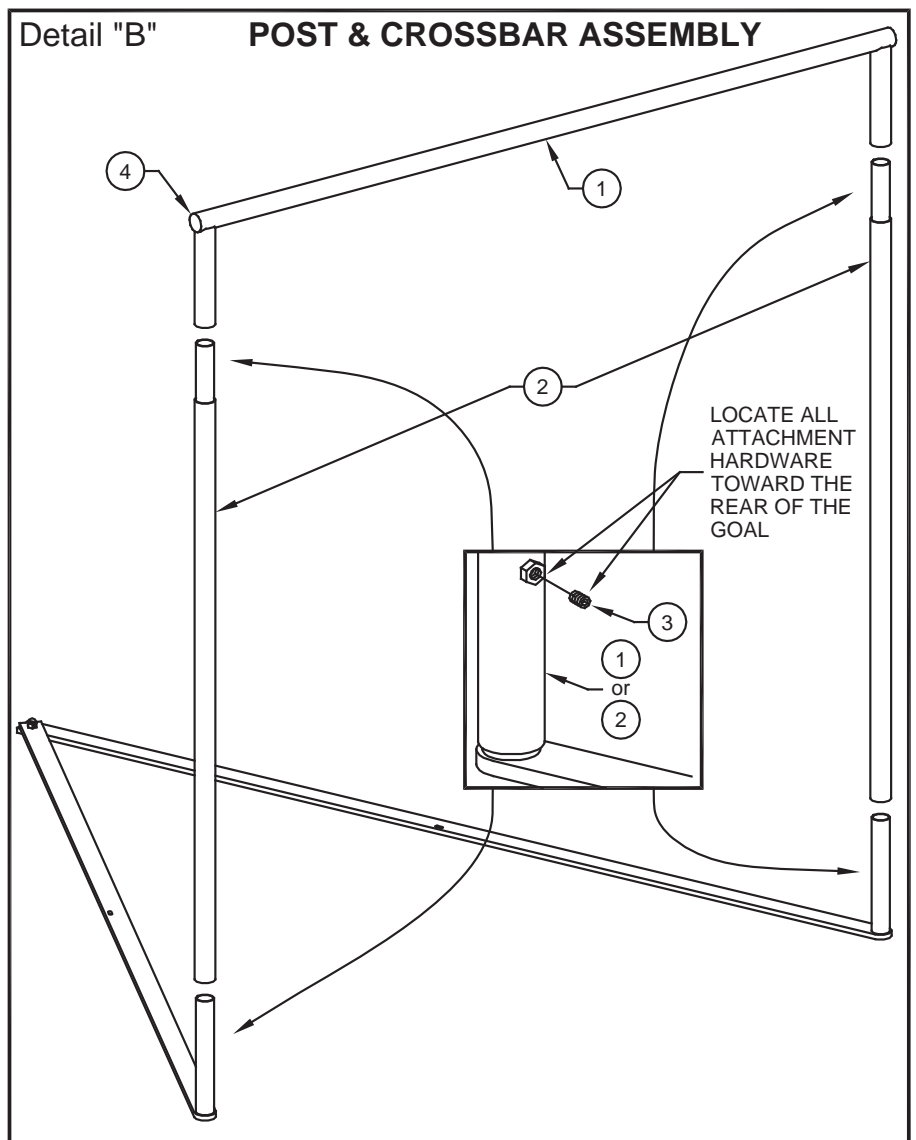

6. Install net to frame using lacing cord provided with net. Secure the net to the ground using the tie-down stakes provided. Locate one tie-down stake at the back end of the net. Use three tie-down stakes (evenly spaced) along each side of the net.



7. Assembly of goal is now complete.

# No. 262100 STATIONARY LACROSSE GOAL


1. Check all items against Parts List on Page 1 to ensure all have been included.
2. The lacrosse goals will be pre-assembled on the ground, before being installed in the concrete footings.
3. Insert inside cap plugs into each end of crossbar. See Detail "D".
4. Assemble crossbar to posts as shown in Detail "D". Tighten set screws.

If lacrosse goals are being used with outdoor ground sleeves, follow the installation instructions provided with the ground sleeves. If lacrosse goals are being installed permanently into concrete footings, proceed to Step No. 4.

5. Locate and dig footings for uprights. **CAUTION** – Contact your local utility companies to locate buried electrical, gas and water lines before digging holes for footings. Also, check for overhead utilities. See Detail "E".

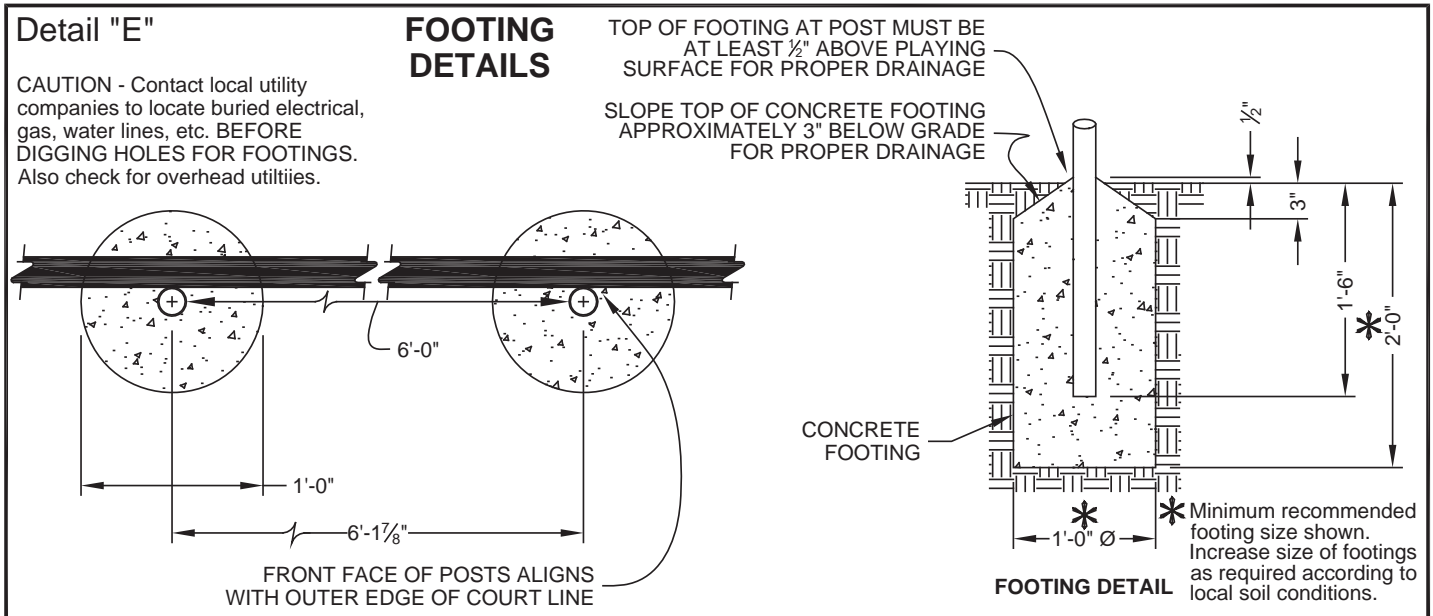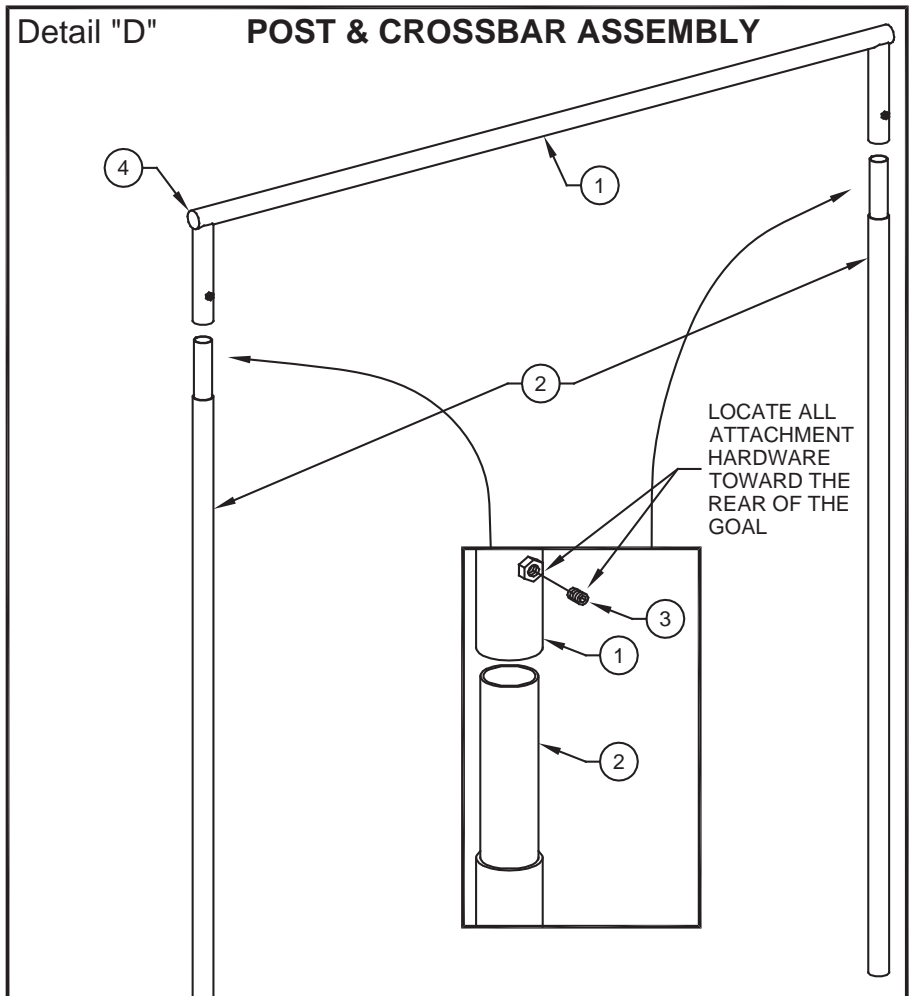

6. Raise the assembled lacrosse goal into position, with the bottom end of the uprights suspended in the holes for the footings. Support the goal assembly at the proper location and height, with 2x4's, etc. The bottom of the crossbar must be located exactly 6'-0" above the playing surface, with the face of the goal even with the outer edge of the court line. See Detail "E".
7. After double-checking the position of the lacrosse goal, pour the concrete footings.
8. Allow the concrete footings to cure for a minimum of three days before assembling the lacrosse net to the goal. The net is secured to the goal with the lacing cord provided with the net.
9. Secure the net to the ground using the tie-down stakes provided. Locate one tie-down stake at the back end of the net. Use three tie-down stakes (evenly spaced) along each side of the net.
10. Assembly of goal is now complete.

 **WARNING:** This product can expose you to Titanium Dioxide, which is known to the State of California to cause cancer. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

**porter**<sup>®</sup>

**Porter Athletic, Inc.**

2500 South 25<sup>th</sup> Avenue, Broadview, IL U.S.A., 60155

Toll Free: (888) 277-7778 • Phone: (708) 338-2000 • Fax: (708) 338-2060

[www.porterathletic.com](http://www.porterathletic.com)

**SAVE THESE INSTRUCTIONS FOR FUTURE USE**