



www.gillathletics.com
800-637-3090

7082 - LANDING SYSTEM TIE-DOWN KIT INSTRUCTIONS for EARTH ANCHORS

WARNING: Anchors must be removed while the landing system is in use.


The tie-down straps help prevent wind damage to landing systems, but are not a guarantee against damage.

Anchors should be located as close to the landing system as possible.

The anchors could pose a small tripping hazard. Take this into account when determining the locations.

Straps are sold individually. A single tie-down kit includes the following:

- 1x 2" Wide Strap 29ft Long
- 2x Three Bar Buckle
- 2x Spiral Stake Earth Anchor

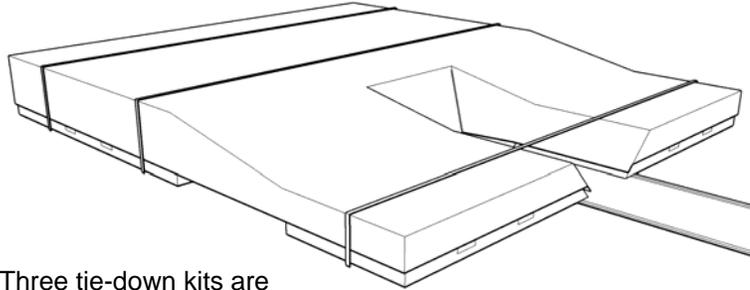

Three tie-down kits are used in this set-up.



Determine the location of the anchors. It is suggested that the anchors be as close to the landing system as possible to reduce the tripping hazard.

Screw the earth anchor into the ground as far as possible.

Use the three bar buckles to attach the straps to the anchor u-bolts.

Lace the strap through the top slot, then the bottom slot.

Next run the strap under the anchor.

Then lace in back through the bottom slot.

Pull the remaining strap to tighten.

Demo video available online.

