




www.gillathletics.com  
800-637-3090

# 730145B - ALUMINUM WATER JUMP BARRIER SEAL INSTRUCTIONS

**Tools Required:**

- 1/2" Wrench or Socket
- Drill
- 21/64" Drill Bit
- Two Adults

First, mark and drill holes in both gussets as shown below.


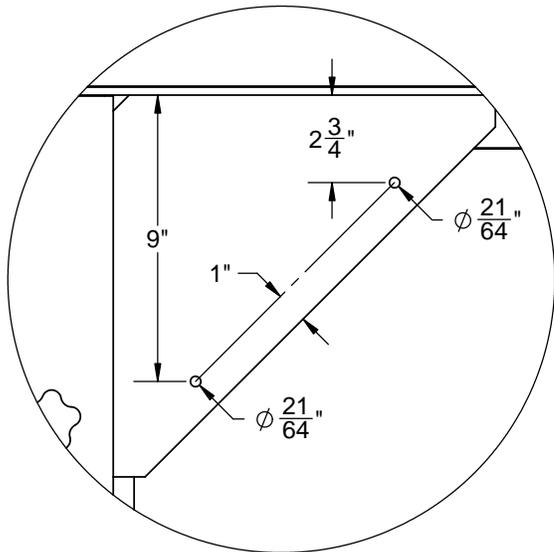


Second, mount the aluminum barrier seal to the gussets.

Insert the carriage bolt through the slot of the grooved plate so the head sits on the flat side of the grooved plate.

Match the grooves in the plate to the ribs on the underside of the bleacher planking.

Align the bolts with the holes in the gusset and secure them with provided nuts.

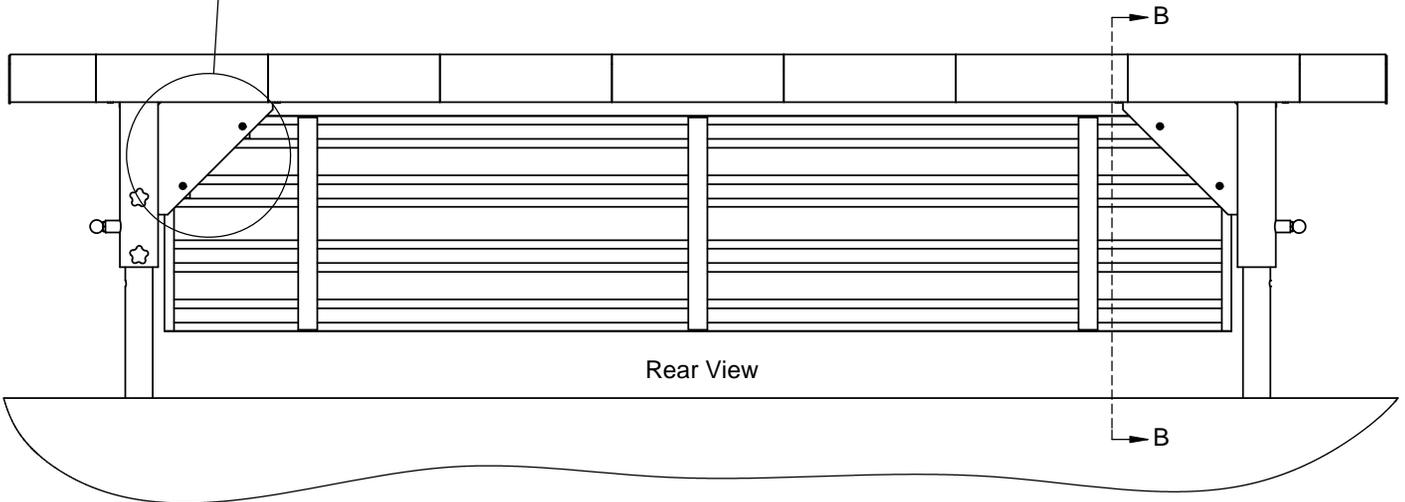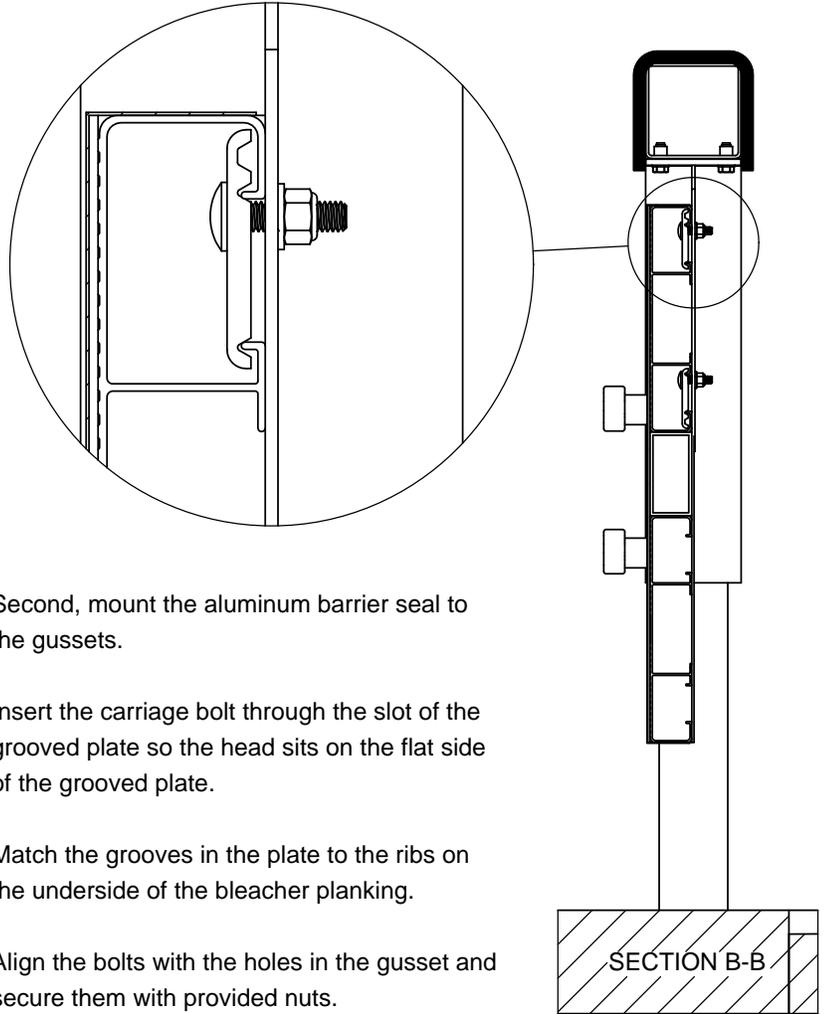

suggestions@gillathletics.com

Copyright © 2013 by Gill Athletics.  
All rights reserved.

**WARNING:** This product can expose you to Titanium Dioxide, which is known to the State of California to cause cancer. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

9/19/2015  
INST730145B  
Page 1 of 1