

## FIBERGLASS BACKBOARD


**Porter**  
www.porterathletic.com/facility

WWW.PORIERAITHLEIC.COM/FACILITY

# BASKETBALL SPECIFICATION SHEET

B-216

6/11/2015

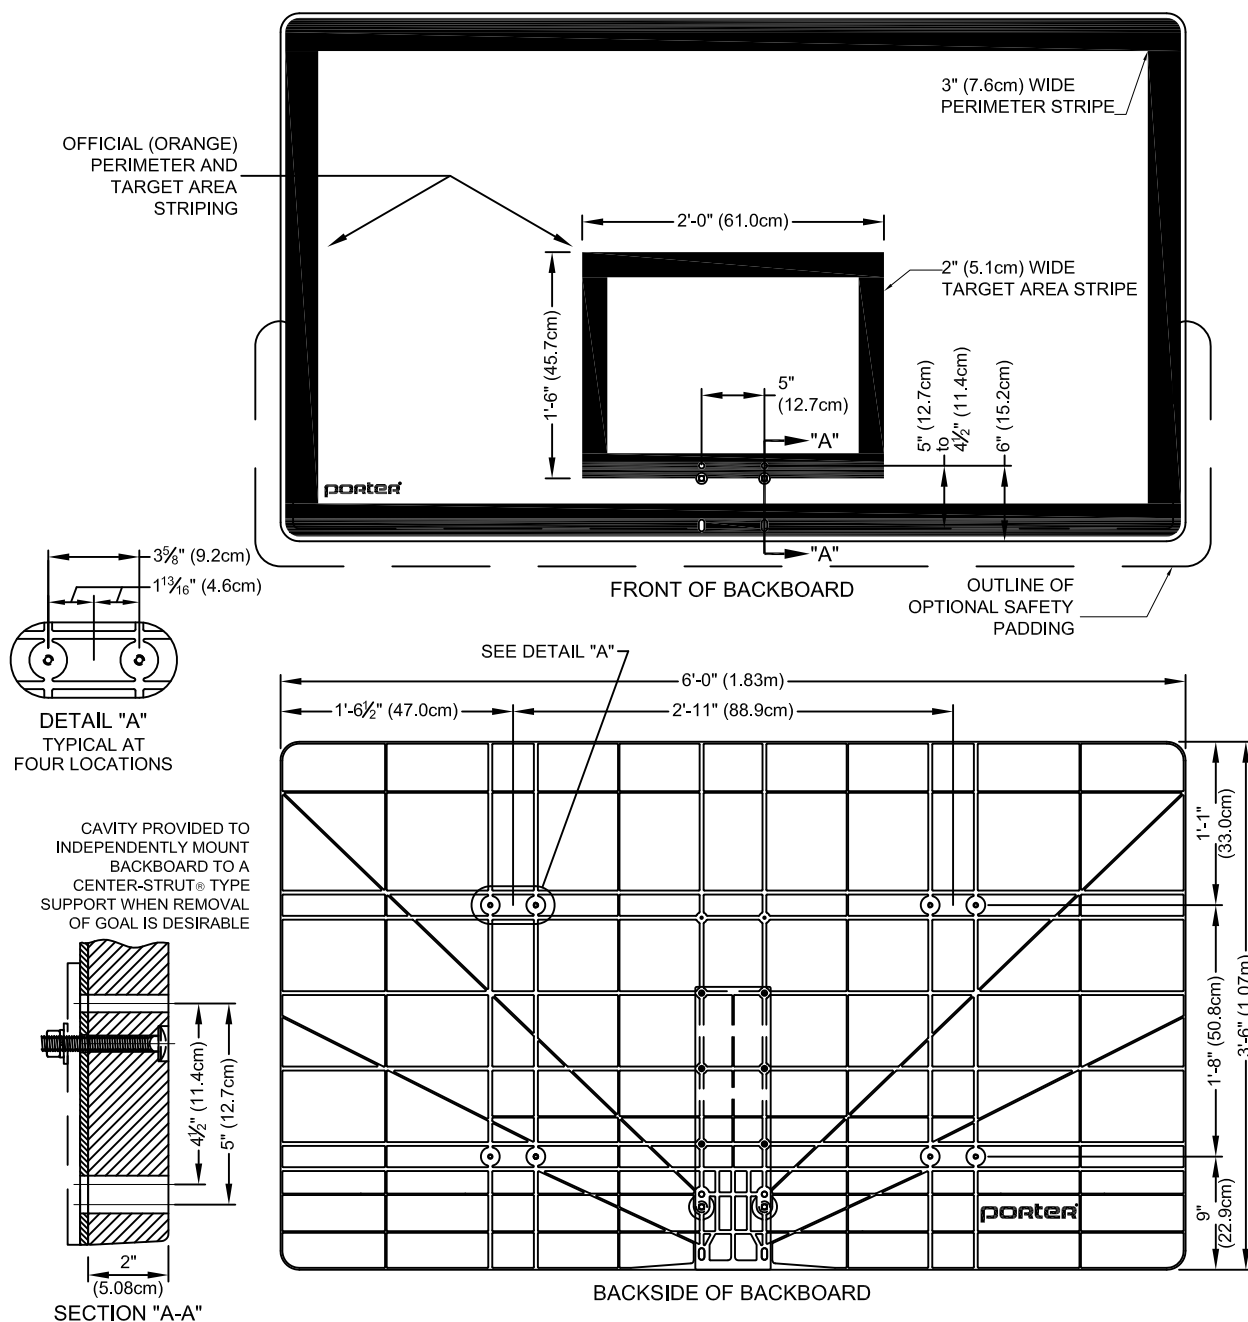

- \_\_\_\_ - 216 FIBERGLASS BACKBOARD  
\_\_\_\_ - FITG00220000 SPACER KIT FOR UNITS WITH NO HEIGHT ADJUSTER  
\_\_\_\_ - FITG00222001 SPACER KIT FOR UNITS WITH HEIGHT ADJUSTER  
SEE B-200 FOR GOAL AND PADDING OPTIONS

# porter®

PROJECT NUMBER

888-277-7778 PORTER@PORTERATHLETIC.COM

©COPYRIGHT 2015 PORTER ATHLETIC - ALL RIGHTS RESERVED PROJECT NAME

## PROJECT NAME

# 216 - RECTANGULAR FIBERGLASS BACKBOARD

## FIBERGLASS BACKBOARD

### SPECIFICATIONS

Backboard size shall be 42" x 72" x 2" (1.07m x 1.83m x 5cm), with official orange perimeter and target area markings. Backboard is molded from high tensile strength fiberglass Sheet Molded Compound (SMC) with heavy perimeter flange and structural rib patterns to provide maximum rigidity and superior rebound qualities. Laminated backboards with a wood or honeycomb type core will not be accepted as equal. Goal mounting area shall be structurally reinforced with a heavy 3/16" x 6" x 1' 10-1/2" (.5cm x 15.2cm x 57.2cm) galvanized steel plate secured to backside of backboard."

Backboard shall also be provided with two additional counter-bored holes behind goal mount area for independently mounting backboard to a Center-Strut® type support system when removal of goal is desirable. Direct mount hardware (two, 3/8" x 3" Lg. plated carriage bolts) is provided with backboard. Goal mounting centers shall be slotted to accommodate goals with a 5" (12.7cm) horizontal x 4 1/2" to 5" (11.4cm to 12.7cm) vertical spacing. Backside of backboard shall be provided with eight (8) 3/8"-16 x 1" deep threaded stainless steel mounting inserts which are located in place at standard 2'-11" (88.9cm) horizontal x 1'-8" (50.8cm) vertical spacing during the molding process. Backboard attachment to support structure utilizing through bolt type installation shall not be considered equal. (see B-200 for goal options)

### WARRANTY

- 216 backboards protected by a limited 10-year warranty against structural defects when installed on Porter Center-Strut® support systems.

### OPTIONAL ITEMS (SEE SPECIFICATION SHEETS FOR DETAIL)

- Padding (see B-200)
- FITG00022000 Spacer kit for units with no height adjuster when used as direct mount
- FITG00222001 Spacer kit for units with height adjuster