

267 - FAN FIBERGLASS BACKBOARD


MOLDED FIBERGLASS BACKBOARD

Porter

WWW.PORTERATHLETIC.COM/FACILITY

BASKETBALL SPECIFICATION SHEET

B-267

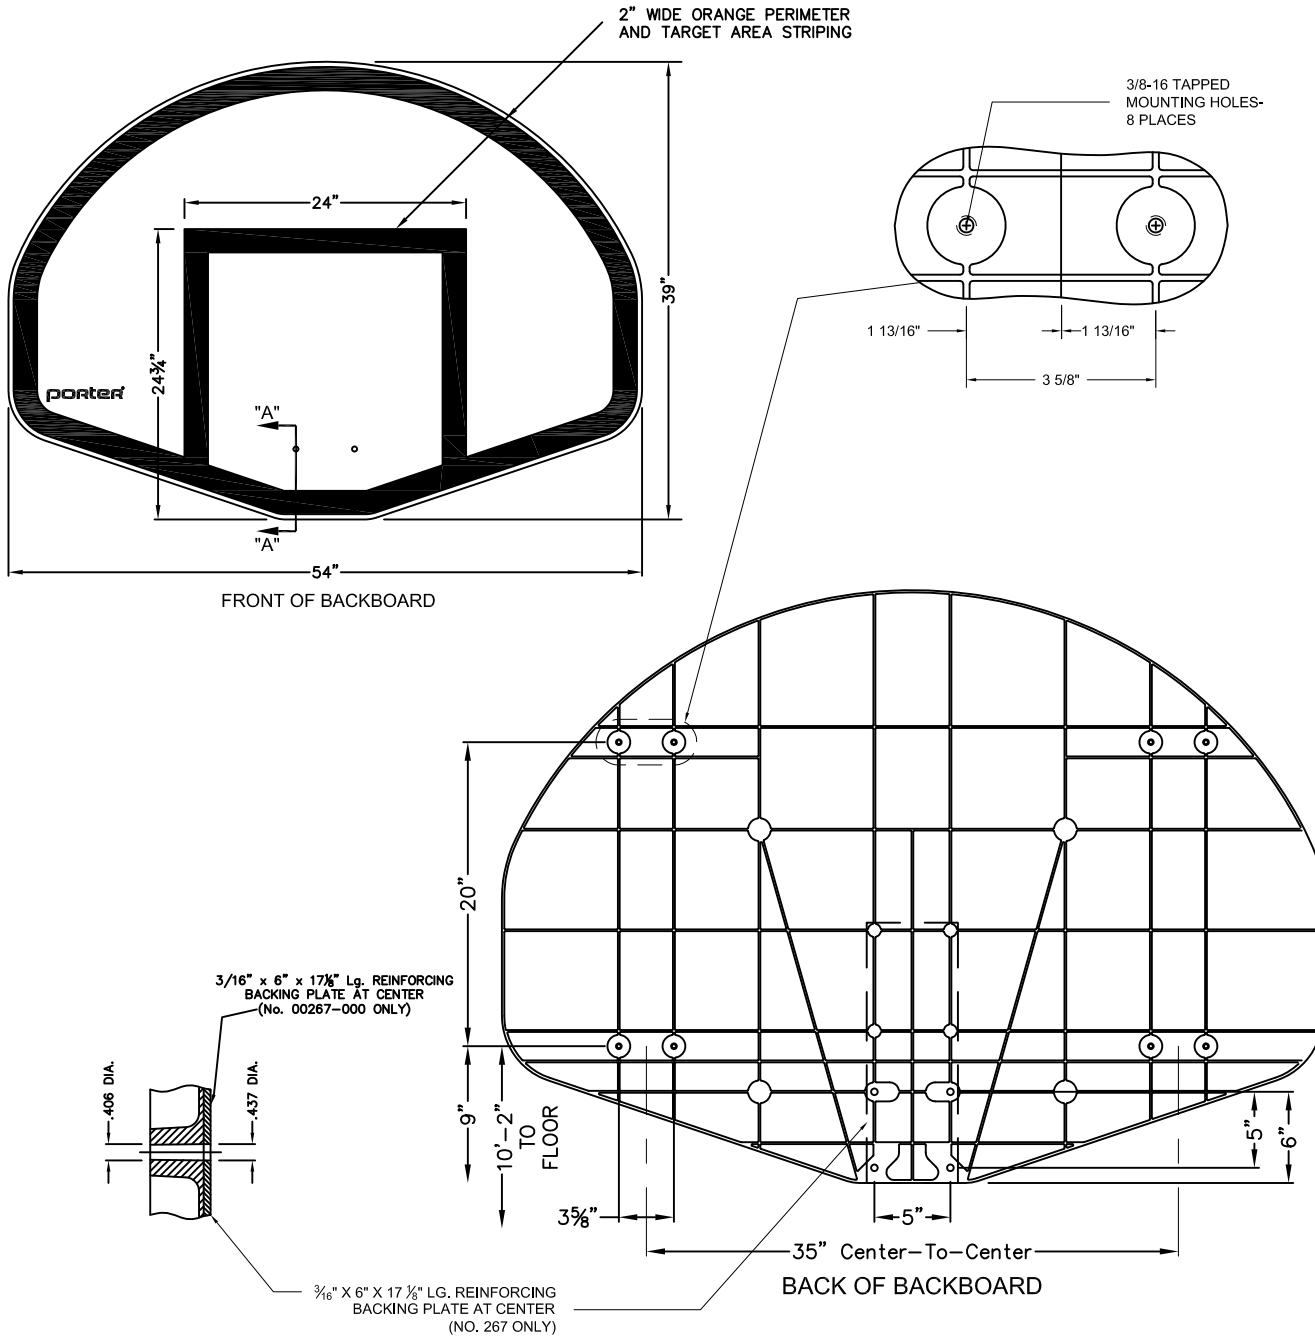

- 267 MOLDED FIBERGLASS BACKBOARD (4 CORNER MOUNT)

- 267A MOLDED FIBERGLASS BACKBOARD (DIRECT MOUNT)

SEE B-200 FOR GOAL OPTIONS

Porter[®]

888-277-7778 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2015 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER

PROJECT NAME

6/11/2015

267 - FAN FIBERGLASS BACKBOARD

MOLDED FIBERGLASS BACKBOARD

SPECIFICATIONS

Molded fiberglass board shall be official size (54" x 39") and shape, with orange perimeter and target area markings. Perimeter flange and structural rib pattern shall be 1-1/2" deep. Tensile strength of board shall be 8,900 - 11,700 PSI with a 23% to 27% fiberglass content by weight. Goal mounting shall be reinforced with a 3/16" x 6" wide plated steel plate secured to backside of board. Eight (8) 3/8-16 stainless steel threaded inserts shall be molded into backside of backboard at standard mounting centers (see B-200 for goal options).

WARRANTY

- 267 backboards protected by a 1-year limited warranty.