


# 9572 - BIG SHOT PRO SYSTEM

4'-0" OFFSET, HEIGHT ADJUSTABLE, BACKSTOP WITH GLASS BACKBOARD, FLEX GOAL, UPRIGHT & BACKBOARD PADDING

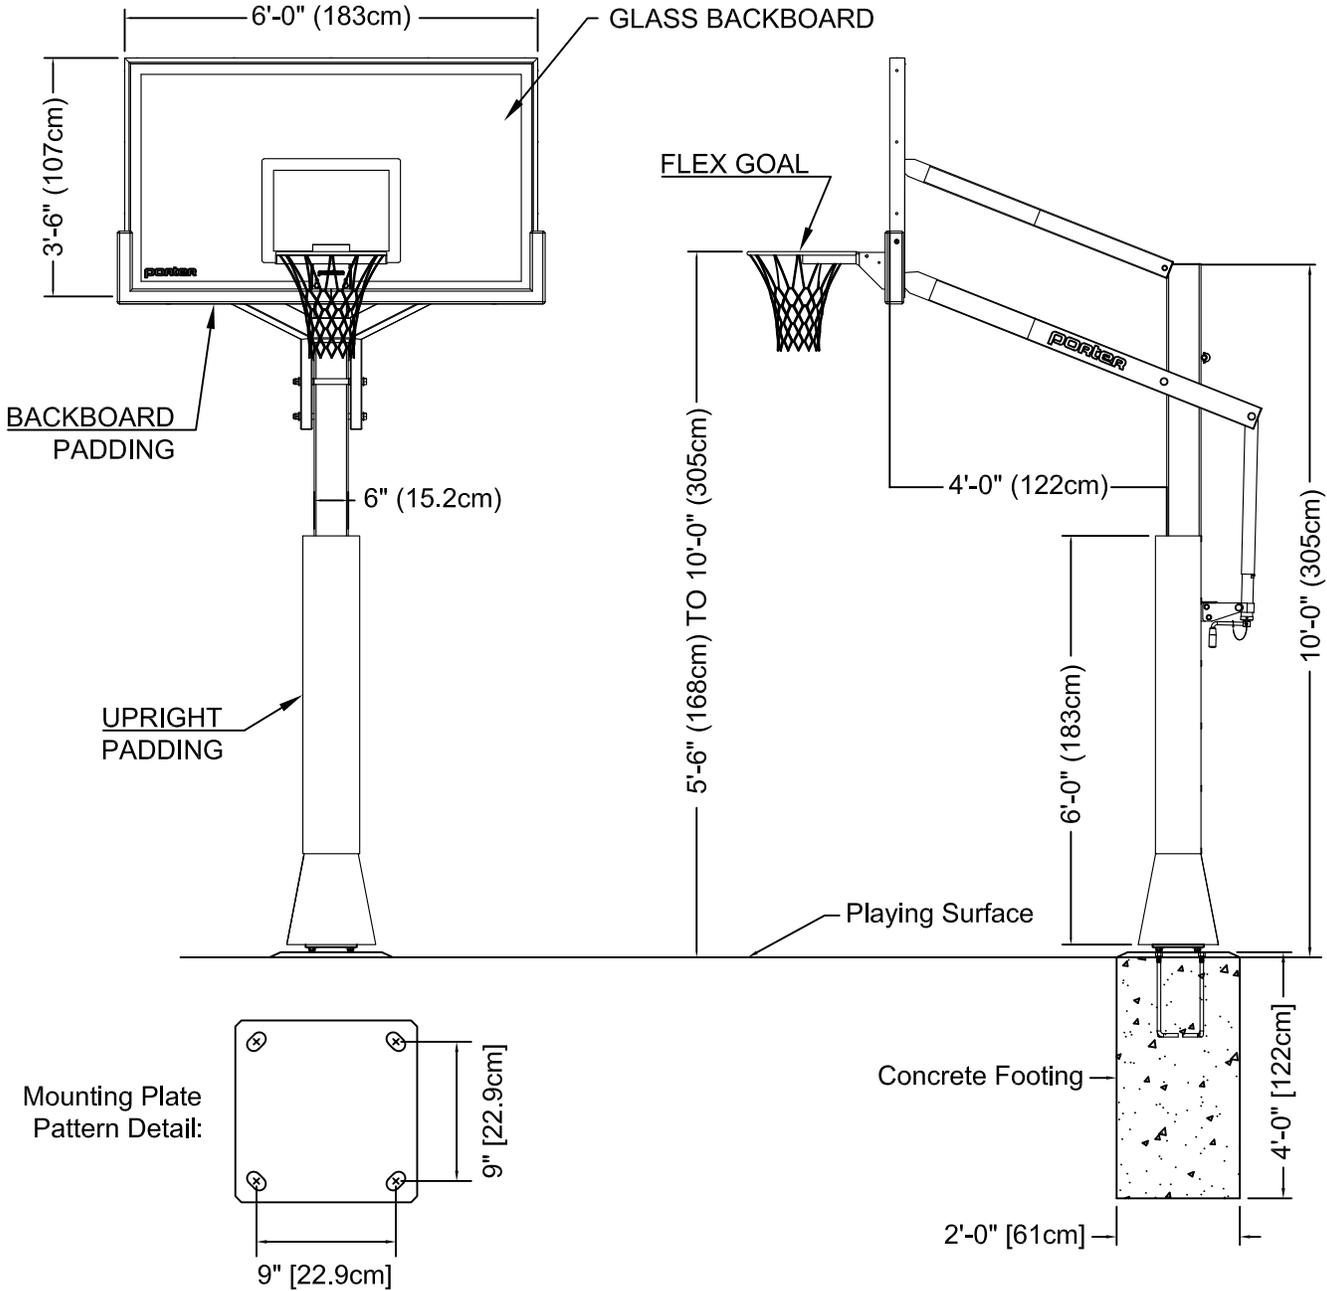

**Porter**

WWW.PORTERATHLETIC.COM/FACILITY

BASKETBALL SPECIFICATION SHEET

R-9572

- 9572

4'-0" OFFSET, HEIGHT ADJUSTABLE, BACKSTOP WITH GLASS BACKBOARD, FLEX GOAL, UPRIGHT & BACKBOARD PADDING

**Porter**<sup>®</sup>

888-277-7778 PORTER@PORTERATHLETIC.COM  
© COPYRIGHT 2018 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

6/21/2018

# 9572 - BIG SHOT PRO SYSTEM

4'-0" OFFSET, HEIGHT ADJUSTABLE, BACKSTOP WITH GLASS BACKBOARD, FLEX GOAL, UPRIGHT & BACKBOARD PADDING

## SPECIFICATIONS

### **PORTER No. 9572 – 4'-0" EXTENDED OUTDOOR BACKSTOP WITH CRANK-TYPE HEIGHT ADJUSTMENT**

Backstop shall be designed for infinite height adjustments from 5'-6" (168cm) to 10'-0" (305cm). From 5'-6" (168cm) to 10'-0" (305cm) goal heights, face of bank shall be supported 4' (122cm) in front of a single 6" (15.2cm) square, heavywall steel vertical support tube. Support tube shall include a heavy, gusseted mounting plate for anchoring to a concrete footing by means of four 18mm dia. steel anchor bolts. Anchor bolt system provides precise plumbing of support system and adjustment of goal height. Installation template is provided for ease of installation.

Two (2) unitized backboard extension assemblies shall extend from and pivot on the vertical support tube to form a parallelogram to hold backboard plumb at all goal height settings. The lower extension assembly shall extend behind the vertical support tube where it shall be pivotally connected to an integral crank/screw, which incorporates a hardened roller thrust mechanism. Crank/screw provides easy adjustment of the goal height. Handle is removable to prevent unauthorized adjustment.

Upright shall be finished in a durable black, powder-coated finish over top of hot-dip galvanized undercoating. Remaining structure shall be finished in a durable black, powder-coated finish over top of zinc undercoating.

Backboard shall be 3'-6" (107cm) x 6'-0" (183cm). Backboard frame shall be of a welded, unitized construction fabricated from heavy-wall rectangular steel tubing. Entire unitized frame structure shall be powder coated in a durable weather-resistant finish before final assembly. Goal mounting holes (4) to be on a 5" x 5" hole pattern.

**PORTER**  
WWW.PORTERATHLETIC.COM/FACILITY

**BASKETBALL SPECIFICATION SHEET**

R-9572