


# 90917000 - FORWARD FOLD BACKSTOP

CEILING SUSPENDED, FORWARD FOLD, REAR BRACED UNIT  
17'-9" TO 28'  $\phi$  OF MAST PIPE TO FINISHED FLOOR

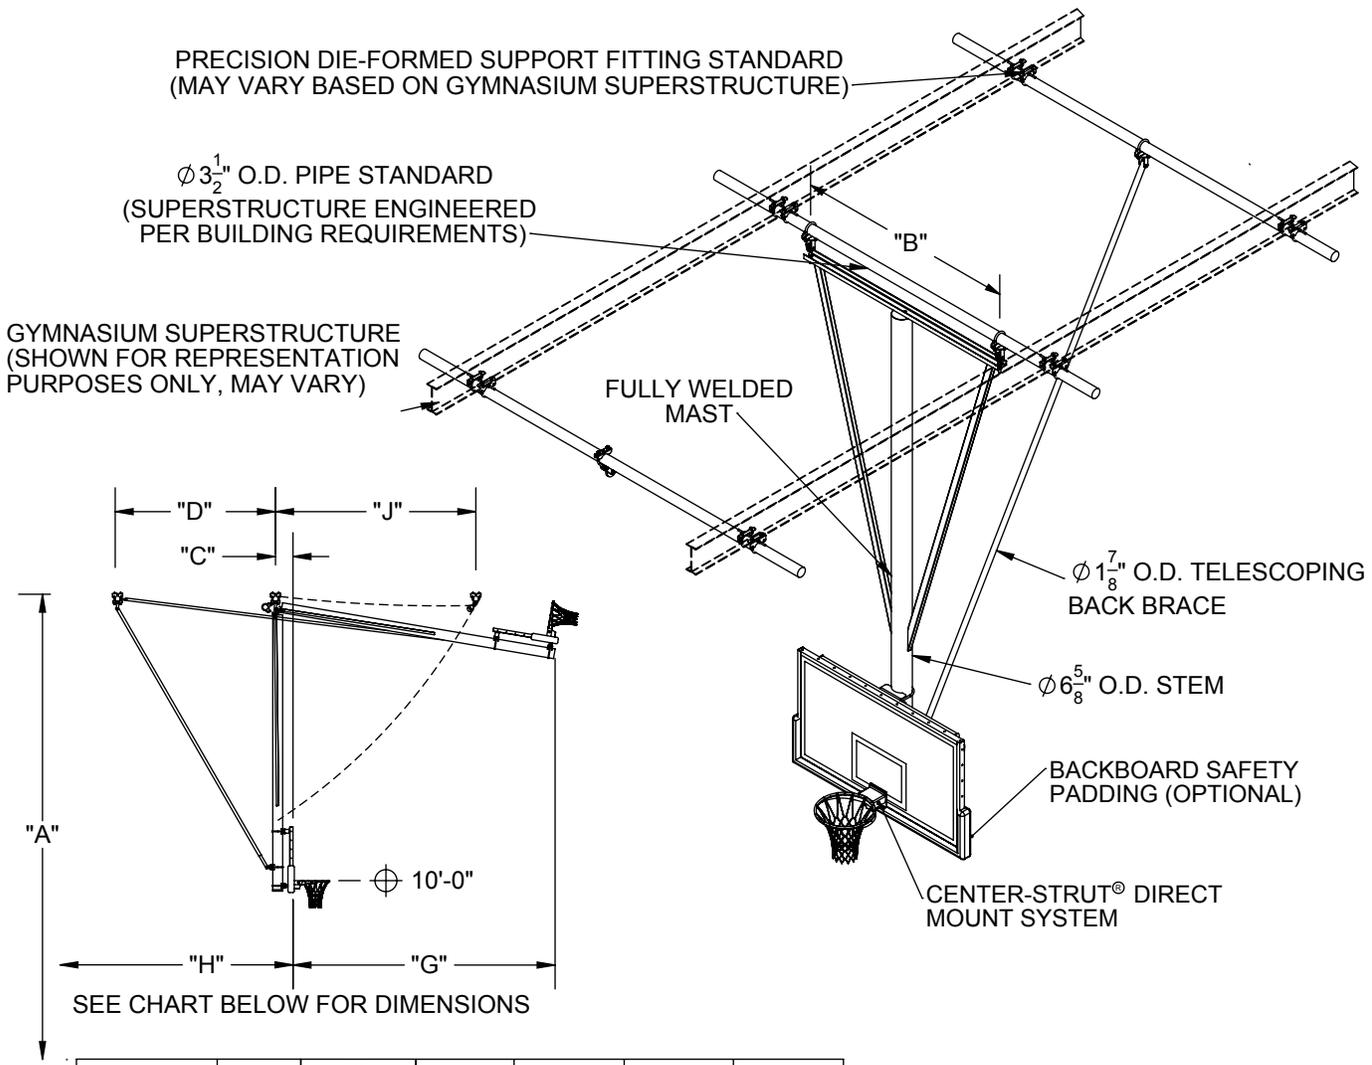

"A" $\phi$ OF MAST PIPE TO FINISHED FLOOR	"B" MAST CENTERS	"C" FACE OF BACKBOARD TO $\phi$ MAST HANGER	* "D" BACK BRACE DIMENSION	"G" HORIZONTAL FOLD DIMENSION	"H" MINIMUM FACE OF BACKBOARD TO WALL	"J" PULLEY DIMENSION (WITHIN 6" $\pm$ )
18'-0" to 19'-0"	5'-0"	SEE "C" DIMENSION CHART	5'-0"	8'-0"	4'-6"	4'-7"
19' 0-1/8" to 20'-0"	5'-0"		5'-6"	9'-0"	5'-0"	5'-7"
20' 0-1/8" to 21'-0"	5'-6"		6'-2"	10'-0"	5'-6"	6'-7"
21' 0-1/8" to 22'-0"	5'-6"		6'-9"	11'-0"	5'-11"	7'-7"
22' 0-1/8" to 23'-0"	6'-0"		7'-4"	12'-0"	6'-5"	8'-7"
23' 0-1/8" to 24'-0"	6'-0"		7'-11"	13'-0"	6'-10"	9'-7"
24' 0-1/8" to 25'-0"	6'-6"		8'-6"	14'-0"	7'-4"	10'-7"
25' 0-1/8" to 26'-0"	6'-6"		9'-1"	15'-0"	7'-10"	11'-7"
26' 0-1/8" to 27'-0"	7'-0"		9'-8"	16'-0"	8'-4"	12'-7"
27' 0-1/8" to 28'-0"	7'-0"		10'-3"	17'-0"	8'-9"	13'-7"

"C" DIMENSION CHART- FACE OF BACKBOARD TO CENTERLINE OF MAST HANGER			
BACKBOARD MODEL NUMBER	DESCRIPTION	WITHOUT HEIGHT ADJUSTER	WITH HEIGHT ADJUSTER
208	RECTANGULAR GLASS	11-5/8"	14-3/16"
216	RECTANGULAR FIBERGLASS	11-3/8"	13-15/16"
234A	FAN ALUMINUM	10-13/16"	13-3/8"
267A	FAN FIBERGLASS	10-3/4"	13-5/16"

\*OPTIMUM DIMENSION GIVEN; SEE DIMENSION "H" FOR MINIMUM REQUIREMENTS

\*UNITS UNDER 20' BOTTOM OF STRUCTURE  
REQUIRE 3 1/2" ADDITIONAL OFFSET

- 9091700 CEILING SUSPENDED, FORWARD FOLD, REAR BRACED UNIT
- BACKBOARD SELECTION
- GOAL SELECTION
- PADDING SELECTION

PROJECT NUMBER \_\_\_\_\_  
PROJECT NAME \_\_\_\_\_

# 90917000 - FORWARD FOLD BACKSTOP

CEILING SUSPENDED, FORWARD FOLD, REAR BRACED UNIT  
17' -9" TO 28' ATTACHMENT HEIGHT

## SPECIFICATIONS

Basketball backstop shall consist of a main center mast of 6-5/8" O.D. heavy-wall structural steel tube with diagonal side sway braces of 2-1/2" x 1-1/2" rectangular steel tubing. Ends of diagonal brace tubes shall be fully welded to main mast. Top horizontal mast member to be of a heavy 4" structural channel to support adjustable suspension hangers. Mast shall be fully welded and suspended by adjustable hangers (2) to provide for precise plumbing of frame during installation. Support hangers shall be offset a minimum of 1-1/2" behind centerline of welded mast to properly weight lock unit in playing position.

Goal shall mount directly through backboard and into a heavy structural steel Center-Strut® weldment which shall be clamped to the vertical 6-5/8" O.D. center support to eliminate any strain on backboard should a player hang on the front mounted goal (conforms to the NCAA latest rules). All fittings shall be attached to the 6-5/8" O.D. vertical drop tube by heavy 1/4" thick precision saddle die-cut formed steel fittings secured in place by 5/8" diameter U-Bolt type hardware.

Back brace assembly shall consist of heavy-wall 1-7/8" O.D. pipe, with internal telescoping tube arrangement to facilitate raising of backstop to overhead storage position. Brace shall be provided with adjustable collar to precisely plumb face of backboard during installation.

Backstop shall be supported from pipe anchored to roof framing members by precision die formed support fittings or custom attachments as required. All cap screws shall be rated a minimum SAE Grade 5. Grade 2 cap screws will not be approved as equal. Bridged pipes may be required when spans exceed 14'.

All metal parts shall be powder coated. See swatch card SMPL00048037 for standard color options. (contact Porter for custom color requests)

Backstop provided with specified backboard and goal (see B-200 for options).

See winch specifications for more information on included Porter winch system and control options. (manual- see B-700, electric- see B-701)

### WARRANTY

- No. 900 Center-Strut® series backstop structure comes with a 25 year limited warranty.
- Limited Lifetime warranty on all Porter backboards when used in conjunction with the No. 900 Center-Strut® series backstop.
- Other components may be covered by their own warranty (see corresponding specifications for more details).

### OPTIONAL ITEMS (SEE SPECIFICATION SHEETS FOR DETAIL)

- Backboard safety padding (see B-200)
- Height Adjuster (8' to 10' adjustable goal height) (see chart below)
- Saf-Strap (No. 797)
- Retractor Reel (No. 10799100, 10799110); with Saf-Strap (No. 10799200, 10799210)

### CENTER-STRUT® HEIGHT ADJUSTER

- |   |                                |                        |
|---|--------------------------------|------------------------|
| • For Manual Operation, See Page No.:         | B-900-506 (Rectangular Boards) | B-900-211 (Fan Boards) |
| • For Key Switch Operation, See Page No.:     | B-901-506 (Rectangular Boards) | B-901-211 (Fan Boards) |
| • For Powr-Stick Operation, See Page No.:     | B-902-506 (Rectangular Boards) | B-902-211 (Fan Boards) |
| • For Sportsonic® II Operation, See Page No.: | B-903-506 (Rectangular Boards) | B-903-211 (Fan Boards) |
| • For Powr-Touch Operation, See Page No.:     | B-904-506 (Rectangular Boards) | B-904-211 (Fan Boards) |

### LEED® SUBMITTAL INFORMATION

Credit	Measure
MRc4-Recycled Content	Post Consumer Average 25.0%      Post Industrial 0%
MRc5-Regional Materials	Raw materials originate from multiple sources so origin point cannot be determined. Final Manufacturing/Assembly in Champaign, IL 61822

### CERTIFICATIONS

- Certified by the NCAA and NFHS