

No. 560 - DuraSafe Wall Pad

GYMNASIUM WALL PAD

PORTER
 WWW.PORTERATHLETIC.COM/FACILITY





WALL PAD SPECIFICATION SHEET

G-560

WARNING
 This wall pad meets the level of protection per ASTM Standard Specification F2440. This pad is provided to reduce the possibility of minor injuries. However, any activity involving motion and severe impacts may result in serious injuries, including but not limited to paralysis or death. No wall pad can guarantee the prevention of serious head or neck injuries that are due to a violent impact while participating in various sports activities.


xx - COLOR SELECTION

| | |
|------------------|------------------|
| 01 - Light Blue | 09 - Gray |
| 02 - Royal Blue | 10 - Maroon |
| 03 - Red | 11 - Purple |
| 04 - White | 12 - Black |
| 05 - Orange | 13 - Navy Blue |
| 06 - Yellow Gold | 14 - Kelly Green |
| 08 - Tan | 15 - Dark Green |

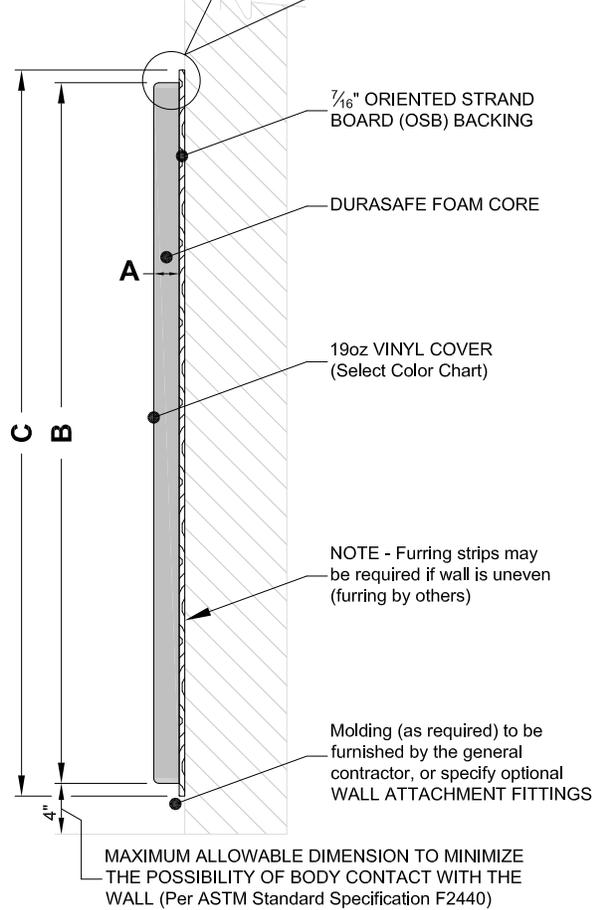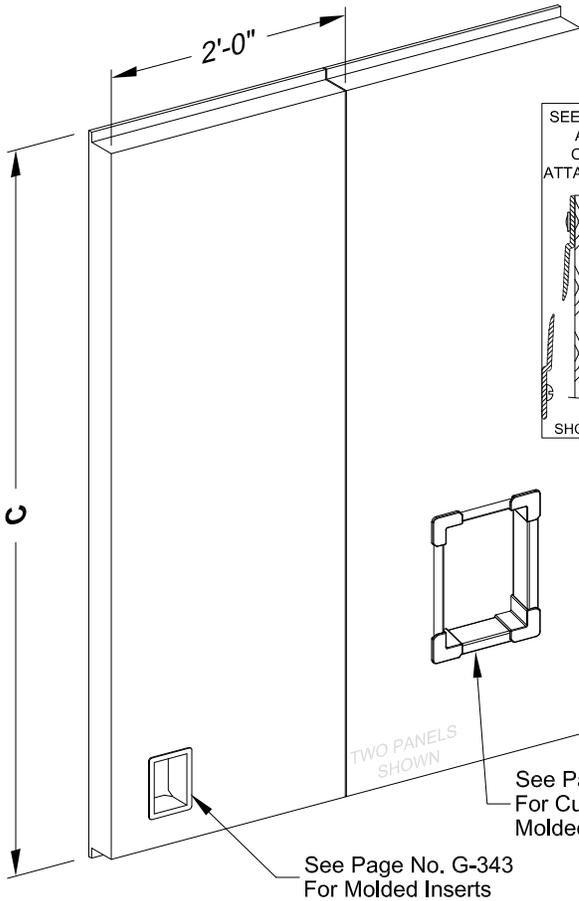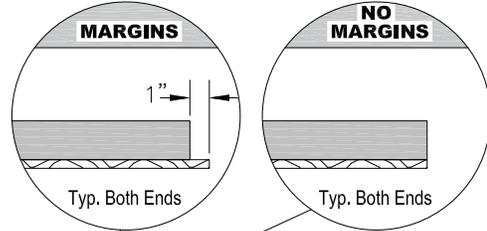

| QTY | PART NUMBER | A FOAM THICKNESS | B FOAM HEIGHT | C OSB HEIGHT | NAILING MARGINS | CUSTOM GRAPHICS |
|-----|-------------|---------------------|------------------|-----------------|-----------------|-----------------|
| | 5600xx | 2" | 70" | 72" | YES | NO |
| | 5600xxSP | 2" | 70" | 72" | YES | YES |
| | 5601xx | 2" | 70" | 70" | NO | NO |
| | 5601xxSP | 2" | 70" | 70" | NO | YES |
| | 5610xx | 3" | 70" | 72" | YES | NO |
| | 5610xxSP | 3" | 70" | 72" | YES | YES |
| | 5611xx | 3" | 70" | 70" | NO | NO |
| | 5611xxSP | 3" | 70" | 70" | NO | YES |
| | 560280xx | 2" | 94" | 96" | YES | NO |
| | 560280xxSP | 2" | 94" | 96" | YES | YES |
| | 560281xx | 2" | 96" | 96" | NO | NO |
| | 560281xxSP | 2" | 96" | 96" | NO | YES |

NOTE: ADD SP TO PART NUMBER FOR GRAPHIC PRINTED WALL PAD

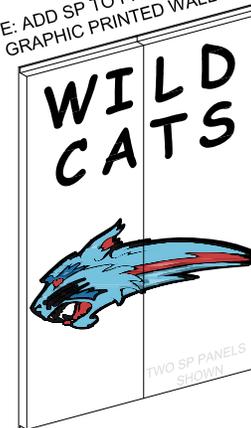

PORTER[®]

888-277-7778 PORTER@PORTERATHLETIC.COM
 © COPYRIGHT 2020 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER _____

PROJECT NAME _____

5/5/2020

No. 560 - DuraSafe Wall Pad

GYMNASIUM WALL PAD

SPECIFICATIONS

PORTER No. 5600xx DURASAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 6'-0" X 2" WITH NAILING MARGINS

Panel shall meet the min. ASTM F2440 Standard Specification for impact performance requirements. The maximum gmax values for the padding shall not exceed 200 and the HIC shall not exceed 1000 when tested at a 4'-0" drop height. Panels that have not been tested to this minimum standard shall not be considered as equal.

Wall pad shall be 2'-0" wide x 6'-0" high, with a 1" nailing margin top and bottom for securing panels to the wall. Panels shall be constructed with a 2" thick foam. Interior foam shall be bonded to a 7/16" oriented strand wood board to minimize warping.

Entire face of panel, including the 1" nailing margins, shall be upholstered in a heavy (19-oz.) fire-retardant, high tensile, vinyl-coated polyester fabric material. Wall pads using less than 19oz vinyl shall not be considered equal. Cover material shall be designated as flame resistant in accordance with NFPA 701, and State of California. The cover material shall have a tear strength of 100 P.S.I. and shall be mildew and rot resistant and fortified with an infection combating fungicide. Vinyl covering shall be folded and stapled securely to backside of oriented strand board. Vinyl covering is available in 14 colors - see color chart for options.

The installing contractor shall be responsible for proper inspection and installation of all panels. Installation shall be made in accordance with current factory procedures, and ASTM Standard Specification F2440. Also, the *NCAA MEN'S AND WOMEN'S BASKETBALL RULES AND INTERPRETATIONS* book states: "It is recommended that padding that meets current ASTM standards be used on walls and other facility features in or around the playing area that a student-athlete might contact during play. Padding should be installed no more than 4 inches from the floor up to 6 feet".

Custom wall pad sizes are available. Custom wall pad worksheets can be found online at www.porterathletic.com

PORTER No. 5601xx DURASAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 5'-10" X 2" WITHOUT NAILING MARGINS

Same specification as No. 5600xx above, except without nailing margins

PORTER No. 5610xx DURASAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 6'-0" X 3" WITH NAILING MARGINS

Same specification as No. 5600xx above, except with 3" thick foam

PORTER No. 5611xx DURASAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 5'-10" X 3" WITHOUT NAILING MARGINS

Same specification as No. 5600xx above, except with 3" thick foam and no nailing margins

PORTER No. 560280xx DURASAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 8'-0" X 2" WITH NAILING MARGINS

Same specification as No. 5600xx above, except 8'-0" high

PORTER No. 560281xx DURASAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 8'-0" X 2" WITHOUT NAILING MARGINS

Same specification as No. 5600xx above, except 8'-0" high and no nailing margins