
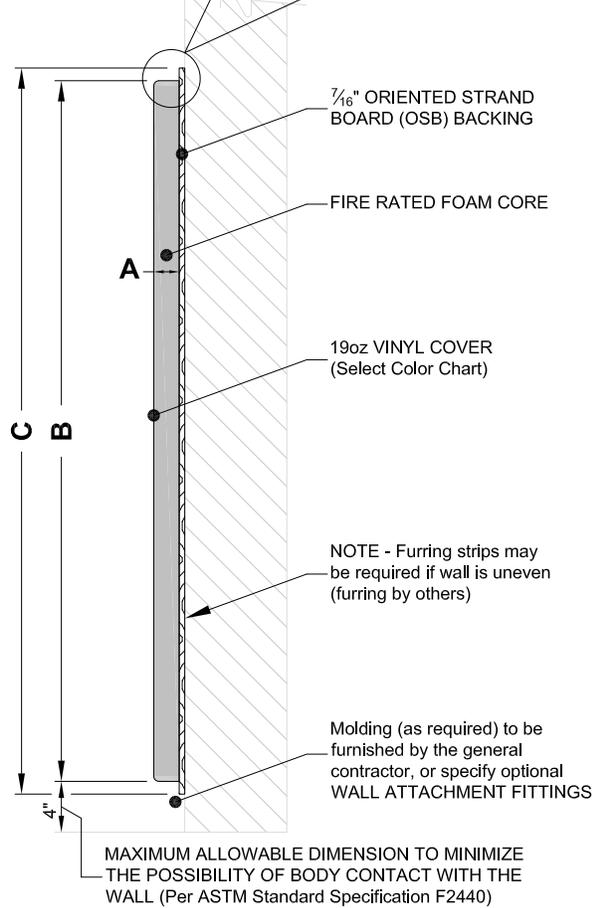
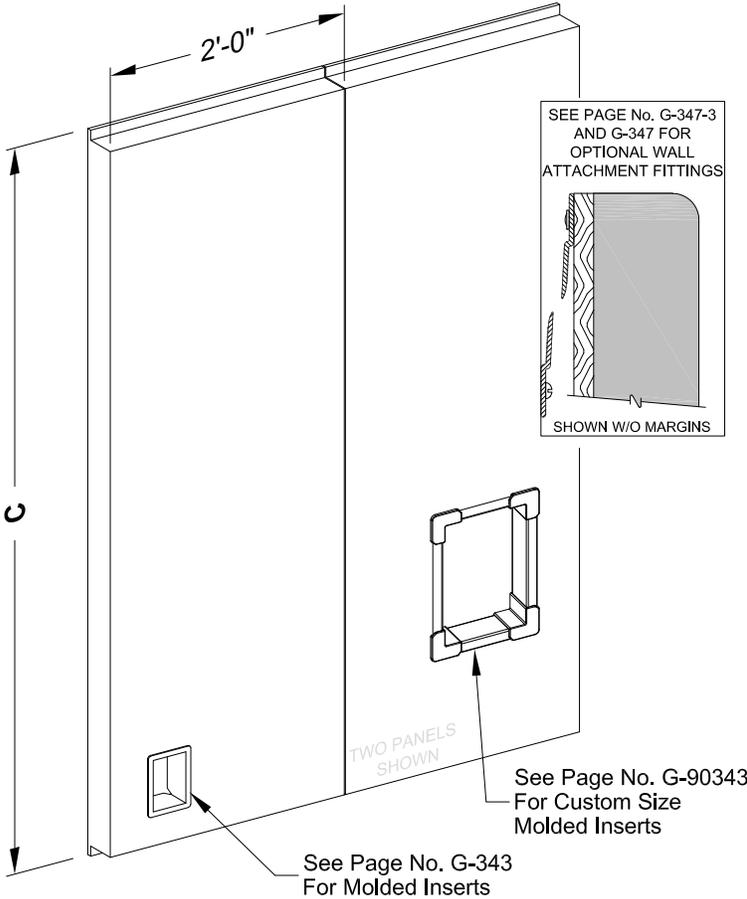


# No. 575 - FireSafe Wall Pad

## FIRE RATED WALL PAD


**xx - COLOR SELECTION**

|                  |                  |
|------------------|------------------|
| 01 - Light Blue  | 09 - Gray        |
| 02 - Royal Blue  | 10 - Maroon      |
| 03 - Red         | 11 - Purple      |
| 04 - White       | 12 - Black       |
| 05 - Orange      | 13 - Navy Blue   |
| 06 - Yellow Gold | 14 - Kelly Green |
| 08 - Tan         | 15 - Dark Green  |

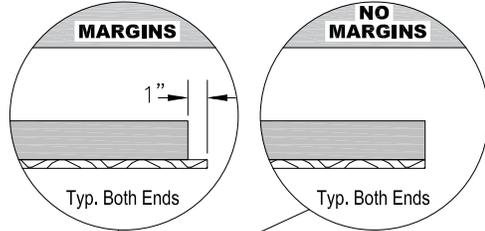

| QTY | PART NUMBER | A<br>FOAM THICKNESS | B<br>FOAM HEIGHT | C<br>OSB HEIGHT | NAILING MARGINS | CUSTOM GRAPHICS |
|-----|-------------|---------------------|------------------|-----------------|-----------------|-----------------|
|     | 5750xx      | 2"                  | 70"              | 72"             | YES             | NO              |
|     | 5750xxSP    | 2"                  | 70"              | 72"             | YES             | YES             |
|     | 5751xx      | 2"                  | 70"              | 70"             | NO              | NO              |
|     | 5751xxSP    | 2"                  | 70"              | 70"             | NO              | YES             |
|     | 5760xx      | 3"                  | 70"              | 72"             | YES             | NO              |
|     | 5760xxSP    | 3"                  | 70"              | 72"             | YES             | YES             |
|     | 5761xx      | 3"                  | 70"              | 70"             | NO              | NO              |
|     | 5761xxSP    | 3"                  | 70"              | 70"             | NO              | YES             |
|     | 575280xx    | 2"                  | 94"              | 96"             | YES             | NO              |
|     | 575280xxSP  | 2"                  | 94"              | 96"             | YES             | YES             |
|     | 575281xx    | 2"                  | 96"              | 96"             | NO              | NO              |
|     | 575281xxSP  | 2"                  | 96"              | 96"             | NO              | YES             |

NOTE: ADD SP TO PART NUMBER FOR GRAPHIC PRINTED WALL PAD

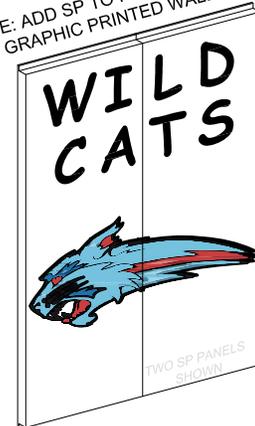

**Porter**

WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-575

**Porter**<sup>®</sup>

888-277-7778 PORTER@PORTERATHLETIC.COM  
© COPYRIGHT 2020 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER

PROJECT NAME

5/5/2020

# No. 575 - FireSafe Wall Pad

## FIRE RATED WALL PAD

### SPECIFICATIONS

#### PORTER No. 5750xx FIRESAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 6'-0" X 2" WITH NAILING MARGINS

Entire pad assembly has been tested and meets the requirements of NFPA 101 Life Safety Code when tested in accordance with NFPA 286. Entire pad assembly has been tested and meets the criteria set forth in the International Building Code (2003 IBC section 803.2.1) when tested in accordance with NFPA 286. ASTM E-84 test is not considered an equal test to NFPA 286.

Wall pad shall be 2'-0" wide x 6'-0" high, with a 1" nailing margin top and bottom for securing panels to the wall. Panels shall be constructed with a 2" thick flame retardant foam. Interior foam shall be bonded to a 7/16" oriented strand wood board to minimize warping.

Entire face of panel, including the 1" nailing margins, shall be upholstered in a heavy (19-oz.) fire-retardant, high tensile, vinyl-coated polyester fabric material. Wall pads using less than 19oz vinyl shall not be considered equal. Cover material shall be designated as flame resistant in accordance with NFPA 701, and State of California. The cover material shall have a tear strength of 100 P.S.I. and shall be mildew and rot resistant and fortified with an infection combating fungicide. Vinyl covering shall be folded and stapled securely to backside of oriented strand board. Vinyl covering is available in 14 colors - see color chart for options.

The installing contractor shall be responsible for proper inspection and installation of all panels. Installation shall be made in accordance with current factory procedures, and ASTM Standard Specification F2440. Also, the *NCAA MEN'S AND WOMEN'S BASKETBALL RULES AND INTERPRETATIONS* book states: "It is recommended that padding that meets current ASTM standards be used on walls and other facility features in or around the playing area that a student-athlete might contact during play. Padding should be installed no more than 4 inches from the floor up to 6 feet".

Custom wall pad sizes are available. Custom wall pad worksheets can be found online at [www.porterathletic.com](http://www.porterathletic.com)

#### PORTER NO. 5751XX FIRESAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 5'-10" X 2" WITHOUT NAILING MARGINS

Same specification as No. 5750xx above, except without nailing margins

#### PORTER NO. 5760XX FIRESAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 6'-0" X 3" WITH NAILING MARGINS

Same specification as No. 5750xx above, except with 3" thick foam

#### PORTER NO. 5761XX FIRESAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 5'-10" X 3" WITHOUT NAILING MARGINS

Same specification as No. 5750xx above, except with 3" thick foam and no nailing margins

#### PORTER No. 575280xx FIRESAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 8'-0" X 2" WITH NAILING MARGINS

Same specification as No. 5750xx above, except 8'-0" high

#### PORTER No. 575281xx FIRESAFE GYMNASIUM WALL PADDING PANEL SIZE: 2'-0" X 8'-0" X 2" WITHOUT NAILING MARGINS

Same specification as No. 5750xx above, except 8'-0" high and no nailing margins