



# 779100 - JUDGE'S STAND

FOR USE ON No. 1791 POWR-STEEL VOLLEYBALL SYSTEM

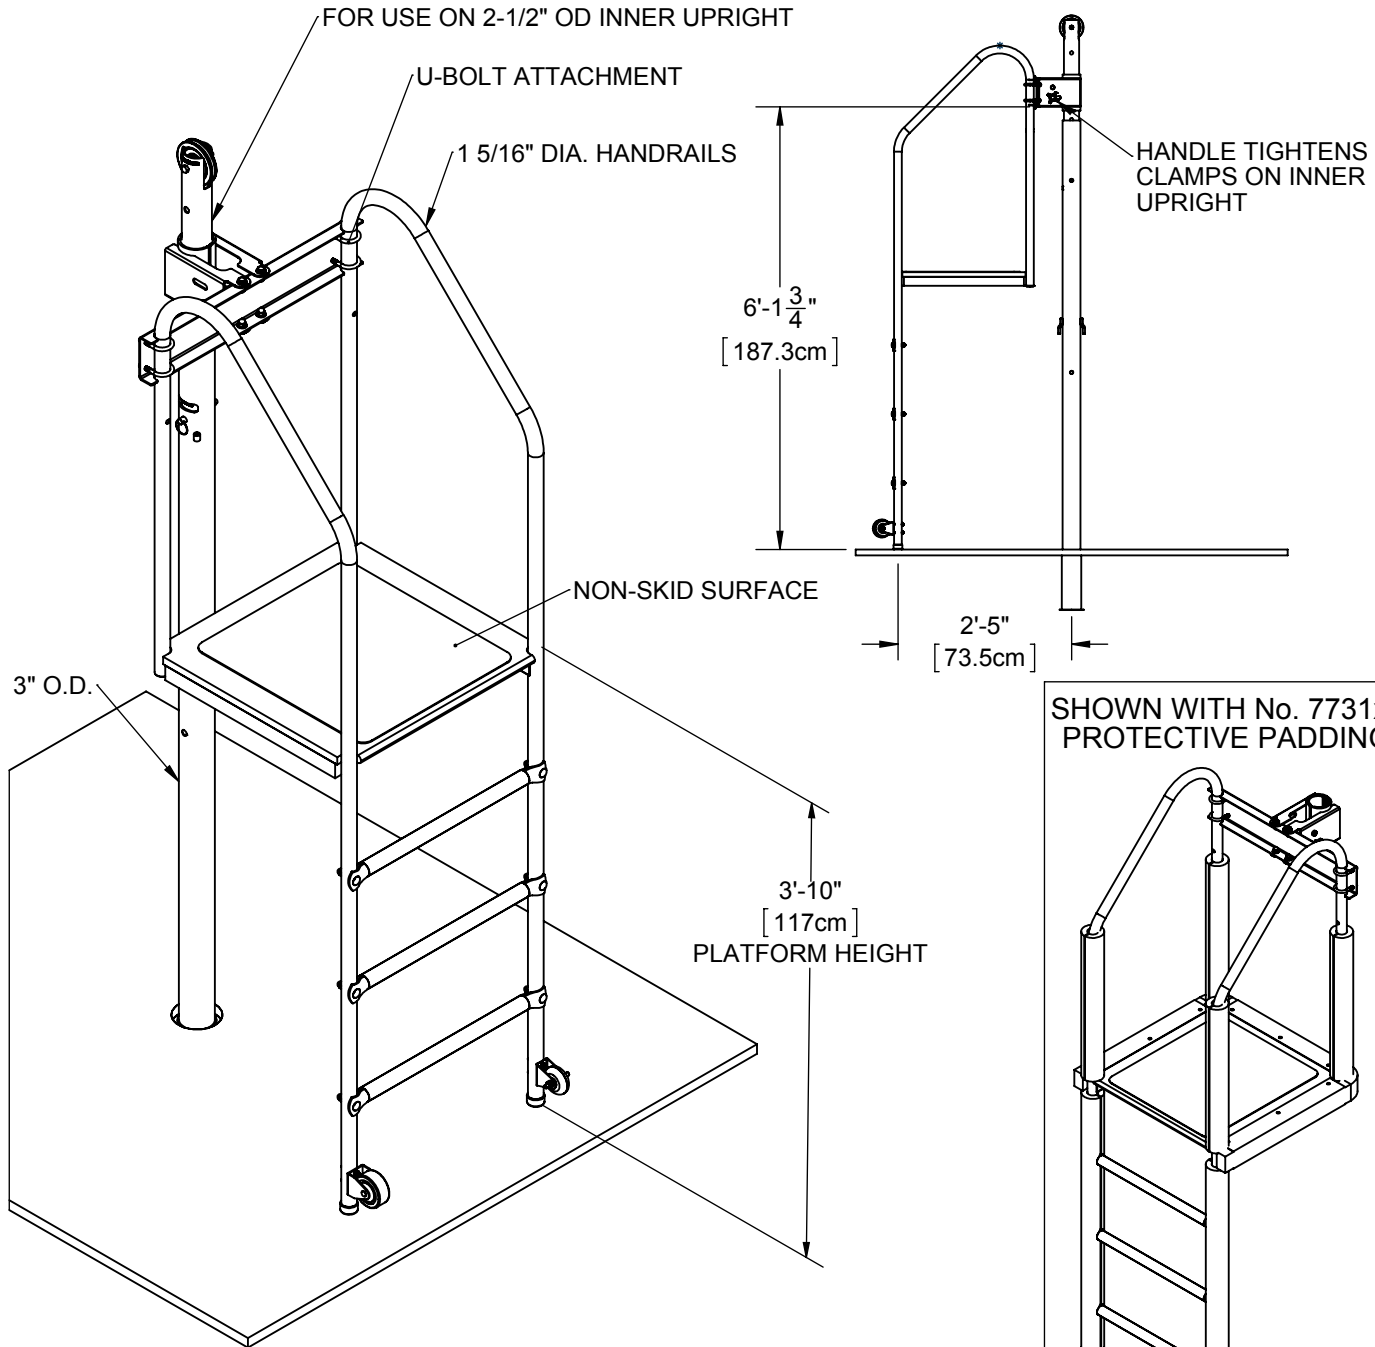

SHOWN WITH No. 7731xx  
PROTECTIVE PADDING

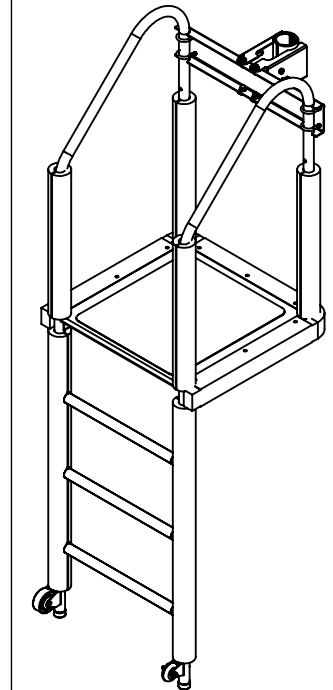

\_\_\_\_\_ - 779100 JUDGE'S STAND FOR No. 1791 POWR-STEEL VOLLEYBALL SYSTEM

\_\_\_\_\_ - 7731xx SET OF PROTECTIVE PADS FOR No. 779100 JUDGE'S STAND

# 779100 - JUDGE'S STAND

FOR USE ON No. 1791 POWR-STEEL VOLLEYBALL SYSTEM

## SPECIFICATIONS

### PORTER No. 779100 JUDGE'S STAND

#### FOR USE ON No. 1791 3" SLEEVE TYPE POWR-STEEL VOLLEYBALL SYSTEM

Judge's Stand shall be designed with a special attachment fitting to clamp onto the inner upright of the No. 1791 Powr-Steel Volleyball System. Entire clamp assemble shall be at a minimum of 6'-0" (183cm) above the floor to comply with the latest requirements as specified by the USAV, NFHS, and NCAA for player protection and safety.

Platform support side frames shall consist of formed 1-5/16" (3.3cm) O.D. steel tube handrail/ladder sections with a heavy angle weldment for the support of the platform. Formed handrails shall extend 38" (96.5cm) above the platform. Three (3) special, formed, 1-5/16" (3.3cm) O.D. ladder rung sections shall be equally spaced to allow for ease of mounting platform. Lower end of ladder side frames shall be equipped with heavy-duty diameter, nonmarking rubber pads. Side frames are also equipped with 3" (7.6cm) diameter, non-marking caster wheels positioned for ease of tipping and transporting to storage areas. Side frames and ladder rungs shall be finished in a durable powder-coated finish.

Platform shall be 23-5/16" x 23-5/16" (59.2cm x 59.2cm), constructed of a high quality 3/4" (1.9cm) thick birch laminate, with a reinforced understructure. Platform shall be finished in a clear lacquer with a non-slip top surface. Top of platform shall be positioned 3'-10" (1.17m) above playing surface when in use.

### PORTER No. 7731xx SET OF PROTECTIVE PADS FOR No. 779100 JUDGE'S STAND

Pads recommended for use on No. 779100 Judge's Stands for player safety as required for all competition volleyball activities.

Set of pads shall consist of a wrap around platform pad (1), ladder upright pads (2), and railing pads (4).

Wrap around platform pad shall be of 1-1/4" (3.2cm) thick polyethylene shock absorbing foam, covered in a polyester reinforced vinyl cover, with grommet flaps for securing to wood platform by means of phillips, flat-head wood screws. Pad shall cover the front and two side edges of the platform.

Ladder upright and railing pads shall consist of 2-7/8" (7.3cm) O.D. shock absorbing polyethylene foam with special Velcro-attached, polyester reinforced vinyl covers.

Protective pads meet the latest requirements as specified by the USAV, NFHS, and NCAA for player protection and safety.