


175-8 - GOOSENECK OUTDOOR BACKSTOP

5' EXTENDED OUTDOOR BACKSTOP FOR RECTANGULAR FIBERGLASS BACKBOARDS

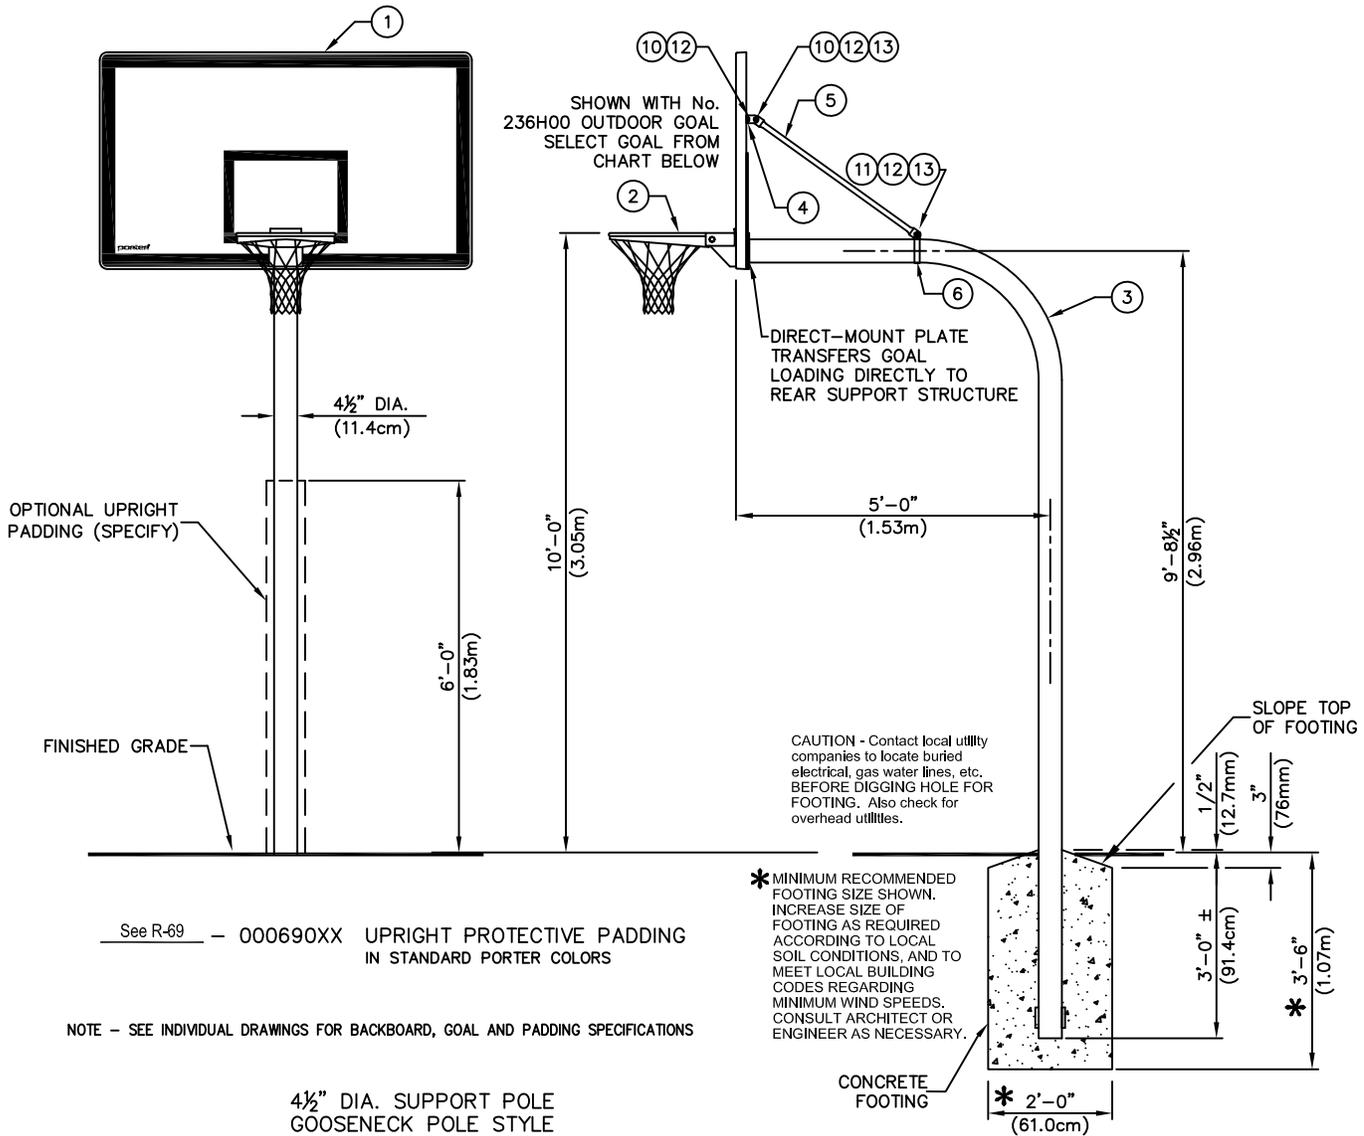

Porter
 WWW.PORTERATHLETIC.COM/FACILITY

BASKETBALL SPECIFICATION SHEET

R-175-8

PART NUMBER:

_____ — **1758** _____
 (Galvanized)

_____ — **1758_CXX** _____
 (Powder-coat, select color)

GOAL BOARD	00235000	00202H00	00251H00	236H00
216	82	83	84	85

EXAMPLE: No. 17582 - INCLUDES 216 FIBERGLASS BACKBOARD AND 00235000 SUPER GOAL

COLOR SELECTION (FOR 1758_CXX only)

01 - Light Blue	10 - Maroon
02 - Royal Blue	11 - Purple
03 - Red	12 - Black (Gloss)
04 - White	13 - Navy Blue
05 - Orange	14 - Kelly Green
06 - Yellow Gold	15 - Dark Green
07 - Silver	22 - Arch. Gray
08 - Gold	23 - Arch. Black
09 - Gray	

NOTE - Upright can be provided in Porter's standard powder-coat colors at additional cost. Refer to Porter's power-coat color chart.

Porter[®]

1-800-637-3090 PORTER@PORTERATHLETIC.COM
 © COPYRIGHT 2017 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER _____

PROJECT NAME _____

6/27/2017

175-8 - GOOSENECK OUTDOOR BACKSTOP

5' EXTENDED OUTDOOR BACKSTOP FOR RECTANGULAR FIBERGLASS BACKBOARDS

SPECIFICATIONS

PORTER No. 1758 __ (CXX) – 5' EXTENDED SINGLE POST BACKSTOP WITH RECTANGULAR FIBERGLASS BACKBOARD AND GOAL

Face of backboard shall be 5'-0" (1.53m) extended from the centerline of the formed upright support. Upright support shall be 4-1/2" (11.4cm) O.D., 7ga. wall (0.180", 4.57mm), zinc Flo-Coated steel tube, formed to an approximate 24" (61.0cm) radius. Vertical section shall extend 3'-0" (91.4cm) into a concrete footing and shall be secured by welded anchor lugs. Horizontal section shall be fabricated with a special, slotted mounting plate to level the backboard and goal. Bolts from the front mounted goal shall mount directly through the backboard and into the Center-Strut® mounting plate to eliminate any strain on the backboard should a player hang on the front mounted goal.

Backboard shall be supported by two, 1" (2.54mm) O.D., 14ga wall, steel sway braces that terminate on the horizontal support tube approximately 32" behind the backboard. Diagonal sway brace tubes shall be secured to the horizontal support tube by means of a heavy steel clamping band, which is adjustable to plumb backboard. Sway brace tubes have a zinc Flo-coat finish.

__ designates goal required – see chart on opposite side of this sheet for selection – specify. For specifications of backboard and optional goals, see specific page in backboard/goal section.

CXX designates optional powder-coat color - see chart on opposite side of this sheet for selection - specify. Upright and brace tubes can be provided in Porter's standard powder-coat colors. Refer to Porter's powder-coat color chart.

OPTIONAL ITEMS TO SPECIFY

See Page No. B-324-72 for specifications on Porter No. 00324672 Backboard Padding (Each).

See Page No. R-69 for specifications on Porter No. 000690XX Upright Padding (Each).

PORTER
WWW.PORTERATHLETIC.COM/FACILITY

BASKETBALL SPECIFICATION SHEET

R-175-8