


2" Sewn I Beam Pads

STANDARD	3560xx	3562xx	3563xx
FIRE RATED	4560xx	4562xx	4563xx

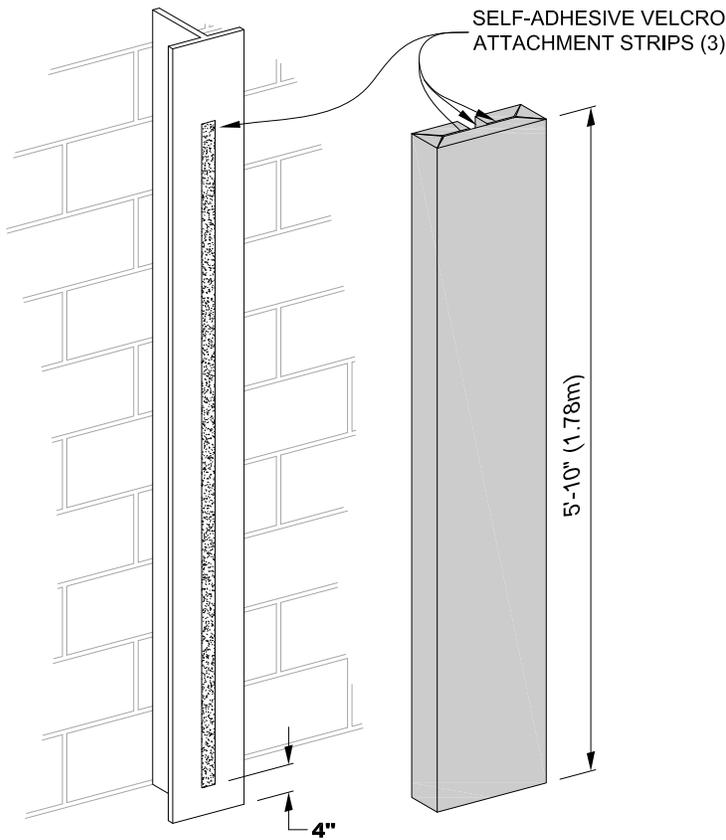

WARNING

This pad is provided to reduce the possibility of minor injuries. However, any activity involving motion and severe impacts may result in serious injuries, including but not limited to paralysis or death. No pad can guarantee the prevention of serious head or neck injuries that are due to a violent impact while participating in various sports activities.

Pads may feature Warning and/or Porter logo labels.

xx - COLOR SELECTION	
01 - Light Blue	09 - Gray
02 - Royal Blue	10 - Maroon
03 - Red	11 - Purple
04 - White	12 - Black
05 - Orange	13 - Navy Blue
06 - Yellow Gold	14 - Kelly Green
08 - Tan	15 - Dark Green

MAXIMUM ALLOWABLE DIMENSION TO MINIMIZE THE POSSIBILITY OF BODY CONTACT WITH THE "I" BEAM (Per ASTM Standard Specification F2440)

- _____ 3560xx "I" BEAM PAD: 6"-8" Wide x 5'-10" High (Under 1/2" Flange Thickness)
- _____ 3562xx "I" BEAM PAD: 8"-10" Wide x 5'-10" High (Over 1/2" Flange Thickness)
- _____ 3563xx "I" BEAM PAD: 10"-12" Wide x 5'-10" High (Over 1/2" Flange Thickness)

- _____ 4560xx FR "I" BEAM PAD: 6"-8" Wide x 5'-10" High (Under 1/2" Flange Thickness)
- _____ 4562xx FR "I" BEAM PAD: 8"-10" Wide x 5'-10" High (Over 1/2" Flange Thickness)
- _____ 4563xx FR "I" BEAM PAD: 10"-12" Wide x 7'-10" High (Over 1/2" Flange Thickness)



2" Sewn I Beam Pads

SPECIFICATIONS

PORTER No. 3560xx "I" BEAM PAD WITH VELCRO ATTACHMENT STRIPS

Pad shall be fabricated in a 5'-10" length with a "C" shaped cross section for attachment to flanges of exposed "I" beams with a width of 6" to 8".

Interior of pad shall be 2" thick foam with a durable vinyl covered nylon material covering. Cover shall be mildew and rot resistant, fortified with an infection combating fungicide. The cover material shall be certified as being flame retardant. Vinyl covering is available in 14 colors.

Inside surfaces of pad shall be provided with three (3) 5'-10" long Velcro strips (one on front center of I Beam, two on backside of I Beam) and three (3) pieces of self adhesive backed Velcro attachment strips for applying to surface of "I" beam.

No. 356 pads may be fabricated in sizes other than listed in specifications at additional cost – (contact Porter).

PORTER No. 3562xx "I" BEAM PAD WITH VELCRO ATTACHMENT STRIPS

Same specification as No. 3560xx above except for 8"-10" "I" Beam Flange Width and over 1/2" Flange Thickness.

PORTER No. 3563xx "I" BEAM PAD WITH VELCRO ATTACHMENT STRIPS

Same specification as No. 3560xx above except for 10"-12" "I" Beam Flange Width and over 1/2" Flange Thickness.

PORTER No. 4560xx "I" BEAM PAD WITH VELCRO ATTACHMENT STRIPS

Same specification as No. 3560xx above except with Fire Rated foam.

PORTER No. 4562xx "I" BEAM PAD WITH VELCRO ATTACHMENT STRIPS

Same specification as No. 3562xx above except with Fire Rated foam.

PORTER No. 4563xx "I" BEAM PAD WITH VELCRO ATTACHMENT STRIPS

Same specification as No. 3563xx above except with Fire Rated foam.

PORTER
WWW.PORTERATHLETIC.COM/FACILITY

WALL PADS SPECIFICATION SHEET

G-356-0