

- Unpack all boxes and confirm all items have been included.
- Install ground sleeves as shown on the following page. System can be installed with either ground sleeves or a sand anchor kit.
- Rest upright on the ground with the groove facing up.
- Place the winch on the upright so that the tie off is facing the top and the winch stop is seated in the gear. NOTE: The bottom of the upright has three holes through the upright for anchoring.
- Slide (2) tapped flats through the groove in the upright until they line-up with the holes on the winch. Fasten the winch to the flats using a flat head cap screw and knob provided. (Do not tighten hardware)
- Repeat steps 4 and 5 for the pulley that sits above the winch. SEE DETAIL A (Do Not Tighten Hardware)
- Repeat steps 4 and 5 for the (2) tie offs on the opposite standard. SEE DETAIL B & C (Do Not Tighten Hardware)
- Hook the S-hook on the top tie off directly opposite of the pulley.
- Adjust all the fittings to the proper heights then tighten all hardware.
- Place a plastic end cap on top of each standard.
- Anchor each standard with the fittings facing the inside of the court.
- Stretch net across court and place the net cable over the pulley on the winch upright. Secure the snap hook to the end loop on the net.
- Attach and tighten net straps to complete installation.

AGE GROUPS	FEMALE/REVERSE CO-ED	MALE/CO-ED
70 years and above	2.19 m (7'-2 1/8")	2.29 m (7'-6")
55 years and above	2.19 m (7'-2 1/8")	2.38 m (7'-9 3/8")
45 years and above	2.19 m (7'-2 1/8")	2.43 m (7'-11 1/8")
15-18 years and under	2.24 m (7'-4 1/8")	2.43 m (7'-11 1/8")
13-14 years and under	2.24 m (7'-4 1/8")	2.24 m (7'-4 1/8")
11-12 years and under	2.13 m (7'-0")	2.13 m (7'-0")
10 years and under	1.98 m (6'-6")	2.13 m (7'-0")

### WARNING

Serious injury, including permanent paralysis, can occur in volleyball. This can be caused by falls on the head, neck, and other parts of the body, or by running into unpadded volleyball standards. *Approved upright padding is mandatory.*

- While it cannot be eliminated, the risk of injuries can be greatly reduced by following proper safety guidelines and completing proper maintenance and safety inspections.

- Never attempt to remove the height adjuster pin if the net is under tension.

- Never attempt to lift or install uprights without assistance.

- Under no circumstances should volleyball standards be stored leaning against a wall or other rigid objects.

- Do not over tighten the volleyball net, as damages to uprights may result and void all written and implied warranties.

- This warning is given in compliance with California's Proposition 65: WARNING- this product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

### General Maintenance


- Inspect equipment for wear, loose fittings, damage, and proper stability before each use.

- Replace defective or worn parts immediately. If in doubt, do not use this equipment until repaired

## GROUND SLEEVE INSTALL OPTIONS


00444000

FOR USE IN DIRT

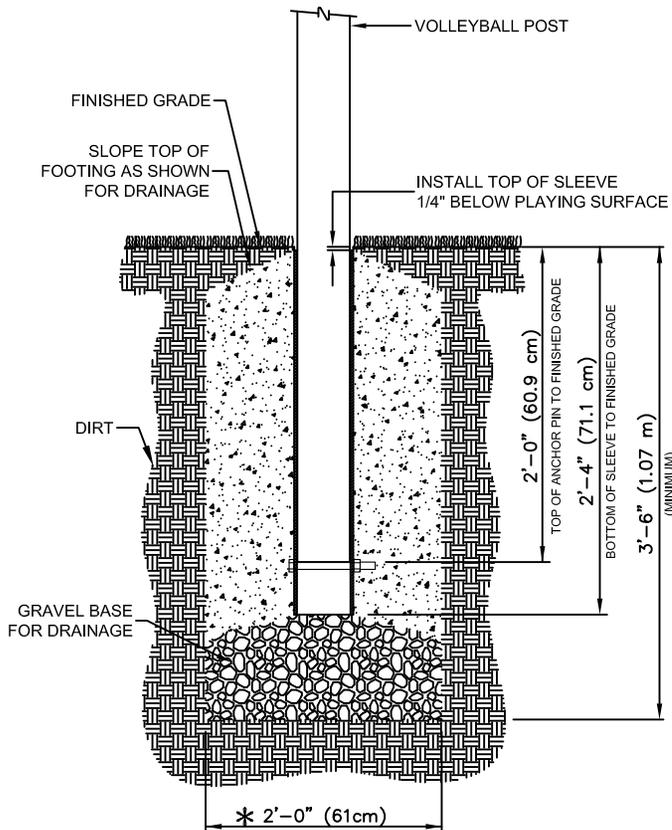


00444040

FOR USE IN DIRT + SAND

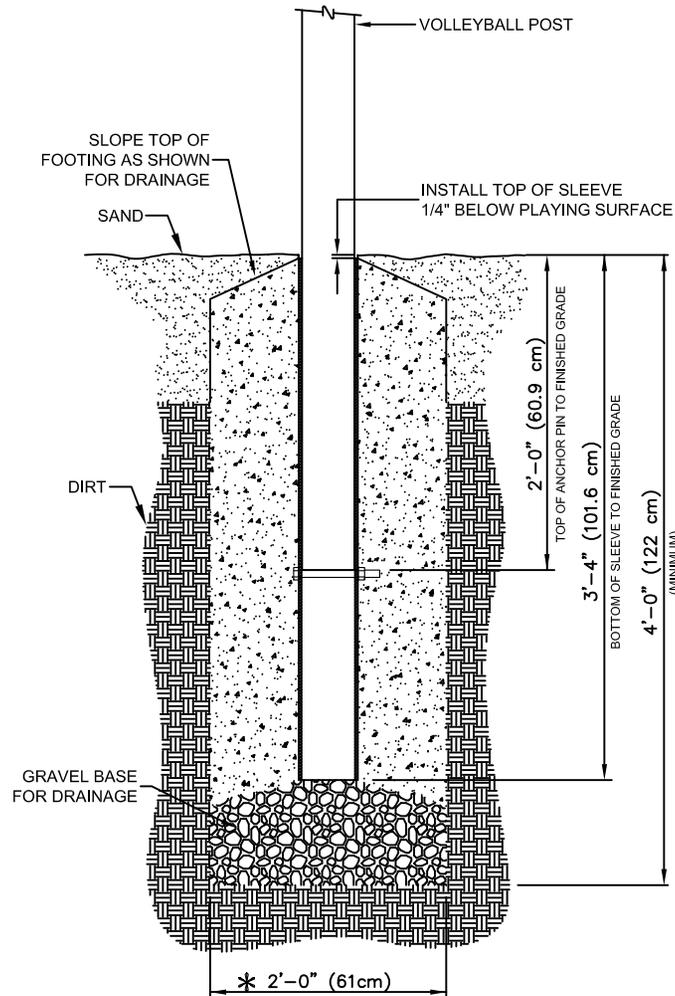

592

FOR USE IN SAND

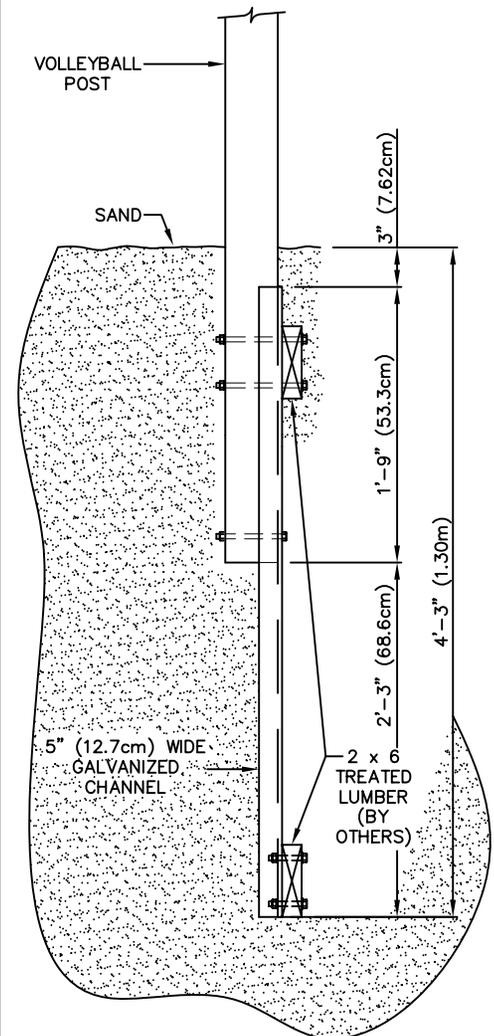

\* Local soil conditions will determine the actual size of concrete footings. The following instructions are recommendations only, and should be considered minimums.

Consult with the architect for exact placement of ground sleeves