


E-2080-2-P - WIRING DETAIL

2080 CENTER-ROLL® DIVIDER CURTAIN
MAXIMUM 120'-0" LENGTH OR 3000 Sq. Ft.

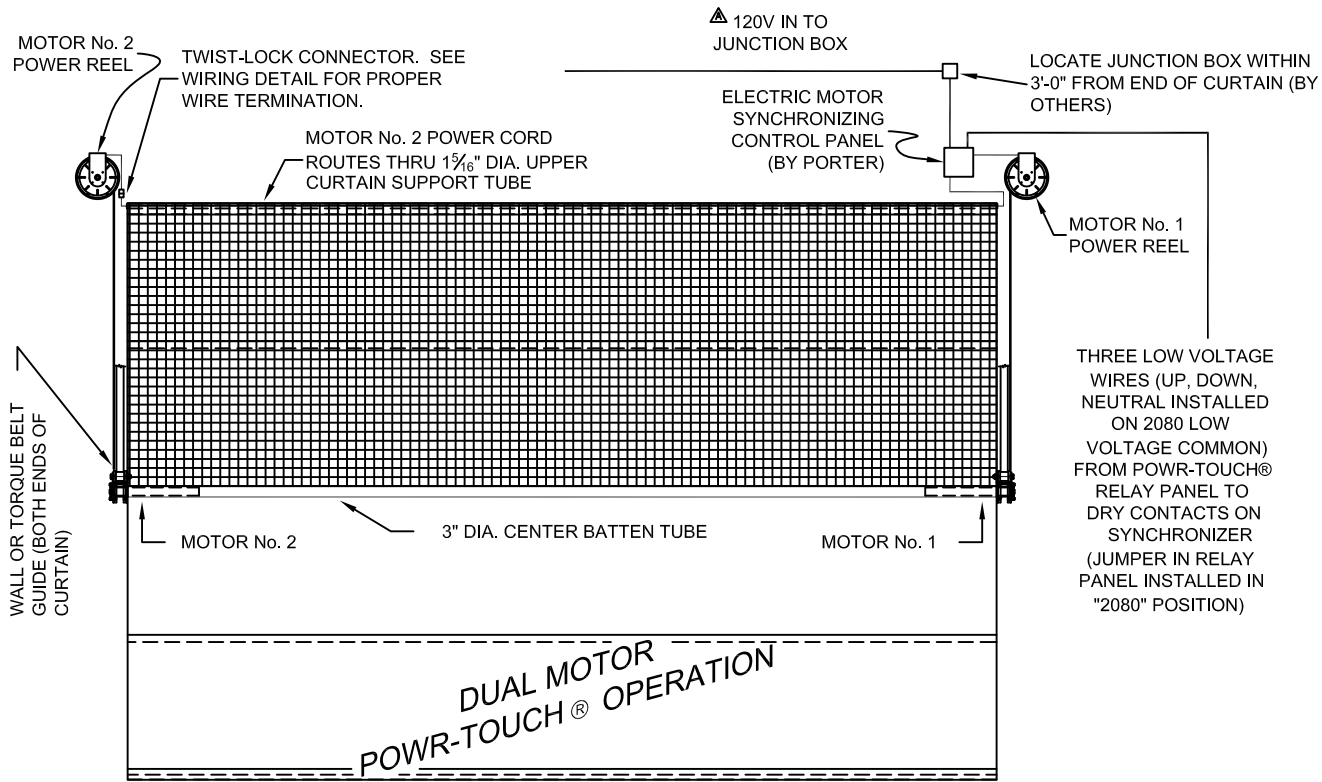


CENTER-ROLL® DIVIDER CURTAIN FIELD WIRING DETAIL
(WITH POWR-TOUCH® OPERATION)

POWER SOURCE REQUIREMENTS (EACH ELECTRIC MOTOR)

- 115 VOLTS
- 5 AMPS
- SINGLE PHASE, 60 Hz.

WIRING OF ALL ELECTRICAL COMPONENTS SHALL BE IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES, AND IN ACCORDANCE WITH THESE INSTRUCTIONS.

NOTE - ELECTRICAL CONTRACTOR TO PROVIDE FIELD WIRING AS REQUIRED TO MEET ALL LOCAL ELECTRICAL CODES.

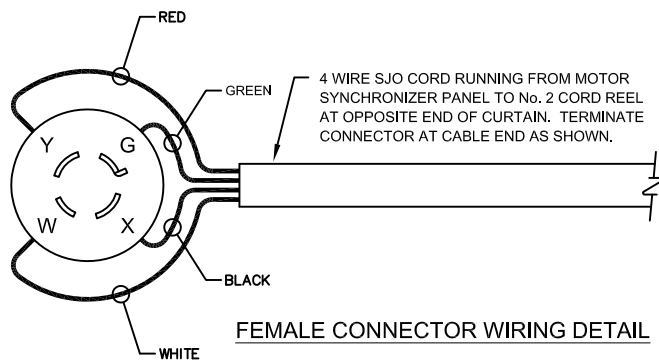

FIELD-WIRING DETAIL FOR CENTER-ROLL® DIVIDER CURTAIN MODELS (FOR UNITS EQUIPPED WITH POWR-TOUCH® OPERATION)

MODEL 92084-__ WALL GUIDE OPERATION DIVIDER CURTAIN (60'-0" TO 120'-0" LG.)

MODEL 92085-__ TORQUE BELT OPERATION DIVIDER CURTAIN (60'-0" TO 120'-0" LG.)

Porter®

888-277-7778 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2014 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER _____

PROJECT NAME _____

Porter

WWW.PORTERATHLETIC.COM/FACILITY

FIELD WIRING SHEET

E-2080-2-P

6/20/2014