


# E-2080-2-S - WIRING DETAIL

## 2080 SERIES CENTER-ROLL® DIVIDER CURTAIN MAXIMUM 120'-0" LENGTH OR 3000 Sq. Ft.

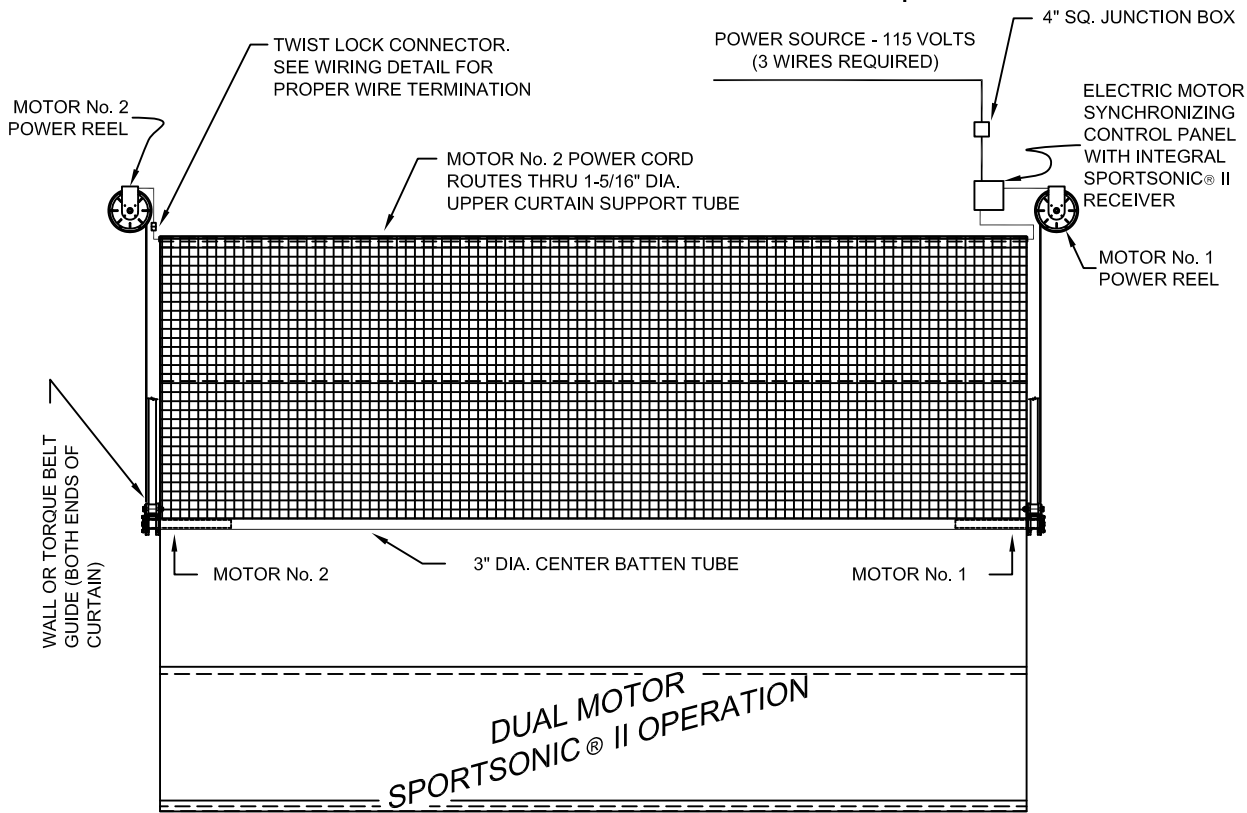


**CENTER-ROLL® DIVIDER CURTAIN FIELD WIRING DETAIL**  
(WITH SPORTSONIC® II WIRELESS CONTROL SYSTEM)

### POWER SOURCE REQUIREMENTS (EACH ELECTRIC MOTOR)

- 115 VOLTS
- 5 AMPS
- SINGLE PHASE, 60 Hz.

NOTE - ELECTRICAL CONTRACTOR TO PROVIDE FIELD WIRING AS REQUIRED TO MEET ALL LOCAL ELECTRICAL CODES.

WIRING OF ALL ELECTRICAL COMPONENTS SHALL BE IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES, AND IN ACCORDANCE WITH THESE INSTRUCTIONS.

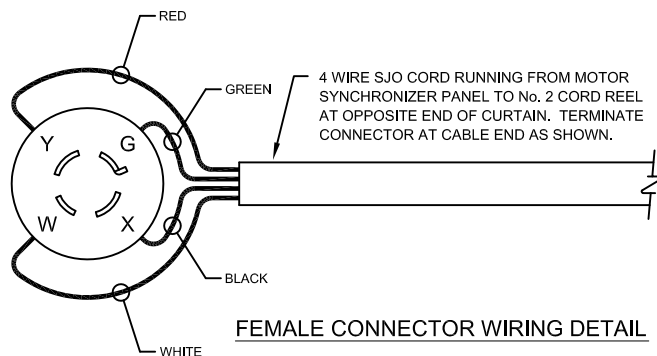

### FIELD-WIRING DETAIL FOR CENTER-ROLL® DIVIDER CURTAIN MODELS (FOR UNITS EQUIPPED WITH SPORTSONIC® II WIRELESS CONTROL SYSTEM)

MODEL 92084-\_\_\_ WALL GUIDE OPERATION DIVIDER CURTAIN (60'-0" TO 120'-0" LG.)

MODEL 92085-\_\_\_ TORQUE BELT OPERATION DIVIDER CURTAIN (60'-0" TO 120'-0" LG.)

**Porter**®

888-277-7778 PORTER@PORTERATHLETIC.COM  
© COPYRIGHT 2014 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

**Porter**

WWW.PORTERATHLETIC.COM/FACILITY

FIELD WIRING SHEET

E-2080-2-S

6/23/2014