


E-2080-1-K - WIRING DETAIL

2080 SERIES CENTER-ROLL® DIVIDER CURTAIN
MAXIMUM 60'-0" LENGTH OR 1500 Sq. Ft.

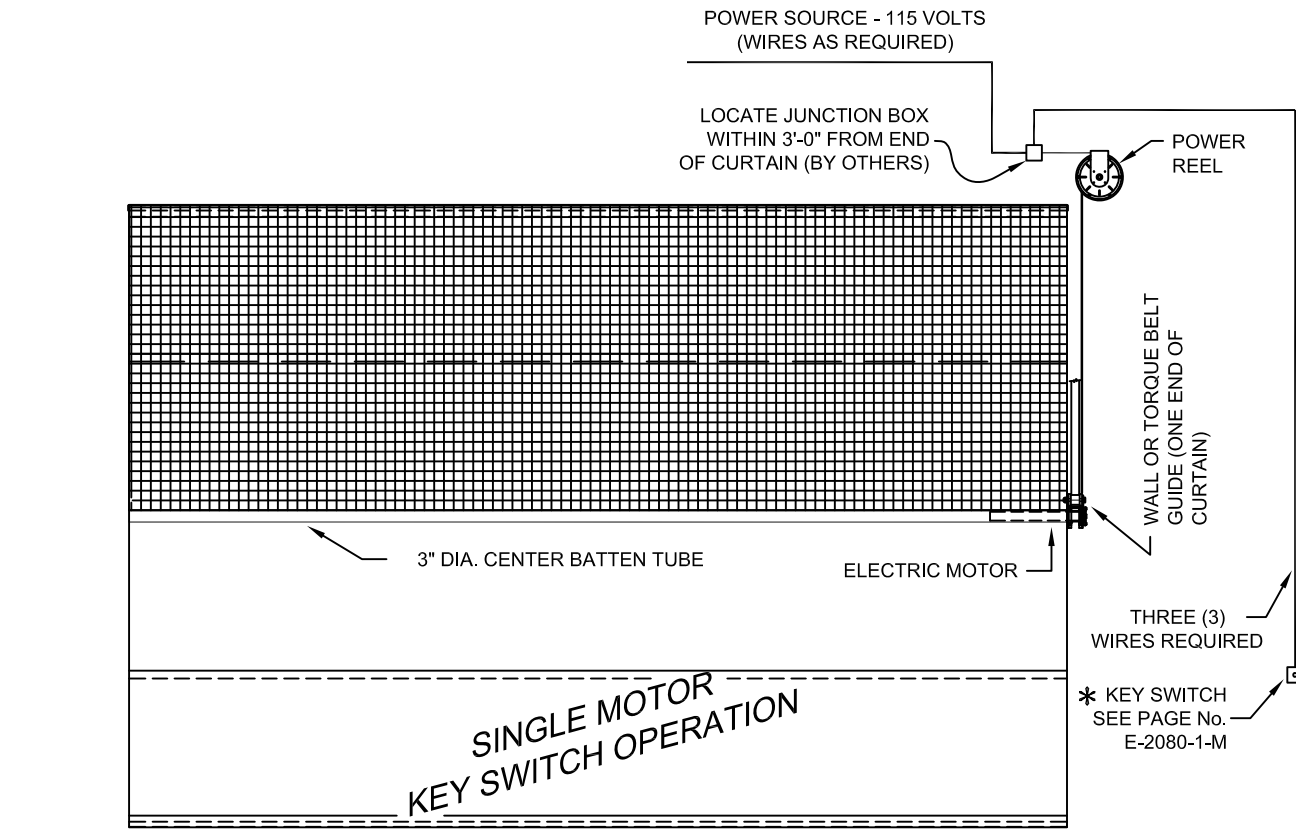

CENTER-ROLL® DIVIDER CURTAIN FIELD WIRING DETAIL

POWER SOURCE REQUIREMENTS (ELECTRIC MOTOR)

- 115 VOLTS
- 5 AMPS
- SINGLE PHASE, 60 Hz.

* CAUTION

KEY SWITCH MUST BE MOUNTED ON
THE WALL IN A LOCATION SO THAT
THE EQUIPMENT IT IS CONTROLLING
IS IN FULL VIEW OF THE OPERATOR.

WIRING OF ALL ELECTRICAL COMPONENTS
SHALL BE IN ACCORDANCE WITH NATIONAL
AND LOCAL ELECTRICAL CODES, AND IN
ACCORDANCE WITH THESE INSTRUCTIONS.

NOTE - ELECTRICAL CONTRACTOR TO PROVIDE
FIELD WIRING AS REQUIRED TO MEET ALL LOCAL
ELECTRICAL CODES.

FIELD-WIRING DETAIL FOR CENTER-ROLL® DIVIDER CURTAIN MODELS (FOR UNITS EQUIPPED WITH KEY SWITCH OPERATION)

MODEL 92081-___ WALL GUIDE OPERATION DIVIDER CURTAIN (MAXIMUM 60'-0" LG.)

MODEL 92082-___ TORQUE BELT OPERATION DIVIDER CURTAIN (MAXIMUM 60'-0" LG.)

Porter®

888-277-7778 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2014 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER _____

PROJECT NAME _____

Porter

WWW.PORTERATHLETIC.COM/FACILITY

FIELD WIRING SHEET

E-2080-1-K

6/20/2014