

POWER SOURCE OPTIONS (3-PHASE ONLY)


- ☐ 208 VOLTS (9.75 AMPS), 3 PHASE, 60 HZ.
- ☐ 460 VOLTS (4.86 AMPS), 3 PHASE, 60 HZ.

WIRING OF ALL ELECTRICAL COMPONENTS SHALL BE IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES, AND IN ACCORDANCE WITH THESE INSTRUCTIONS.

FIELD WIRING DIAGRAM FOR THE FOLLOWING MODELS:


- 91107-000 SINGLE (42'-45') MAT MOVER (OVERHEAD)
- 91107-050 SINGLE (42'-45') MAT MOVER (WALL-MOUNTED)
- 91107-002 DOUBLE (42'-45') MAT MOVER (OVERHEAD)
- 91107-052 DOUBLE (42'-45') MAT MOVER (WALL-MOUNTED)

FIELD WIRING DETAIL

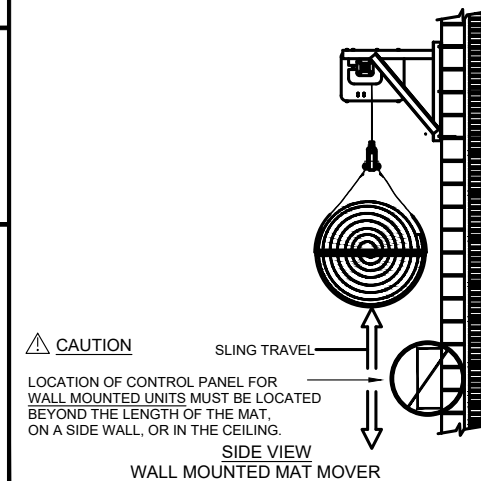

FIELD WIRING FOR STATIONARY MAT MOVER

CONTROL PANEL
6" DEEP ENCLOSURE

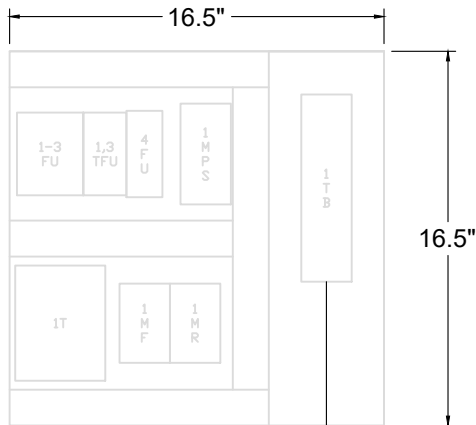

***NOTE:**

ALL WIRING SHOWN SHALL BE PROVIDED BY OTHERS. ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR SIZING WIRES APPROPRIATELY FOR THE LOAD AND DISTANCE BETWEEN TERMINATIONS.

