




# 90640N00 - WALK DRAW GYMNASIUM DIVIDER NET

**Porter**


WWW.PORTERATHLETIC.COM/FACILITY

## CURTAIN SPECIFICATION SHEET

C-640-N

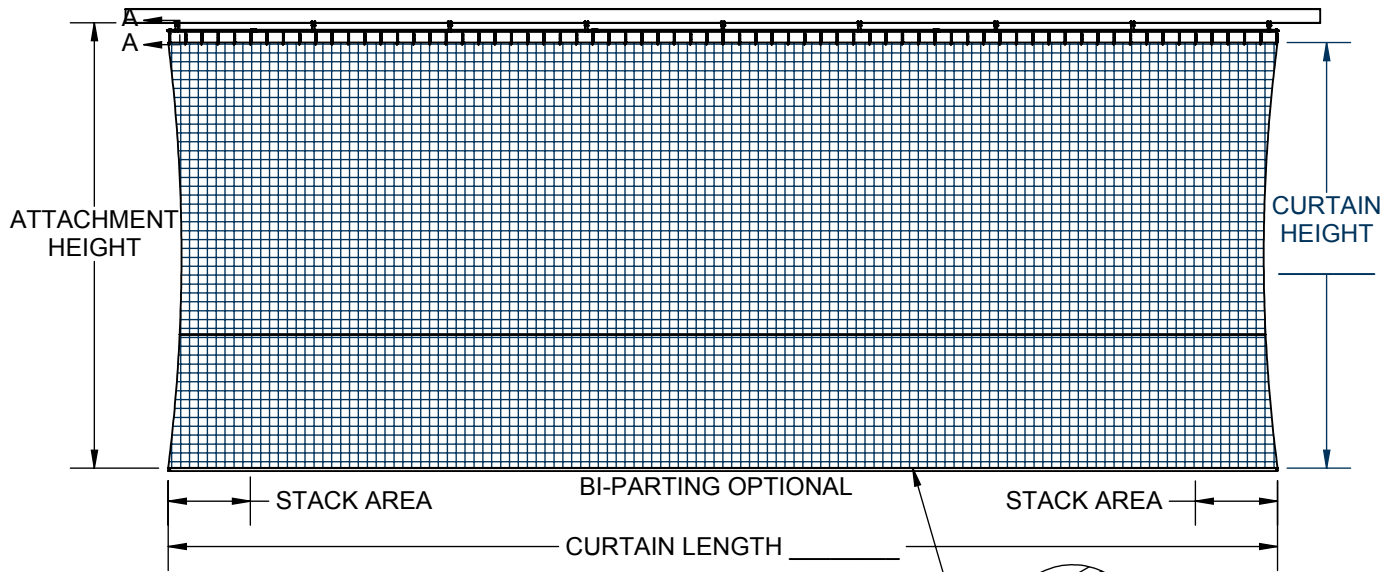

### HANGER VARIATIONS

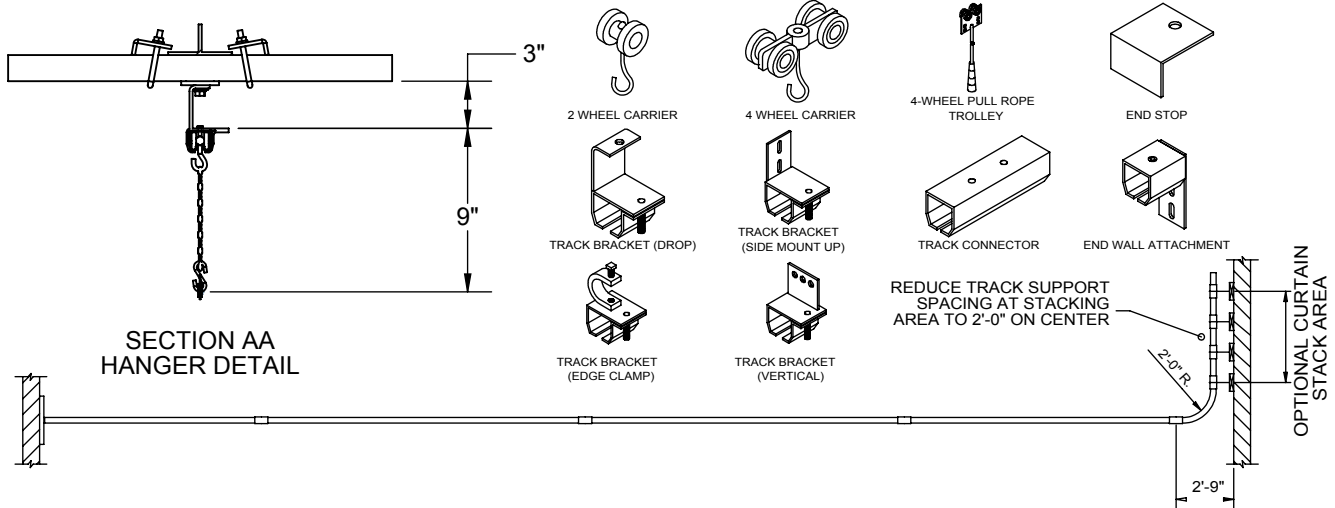

COLOR COMBINATIONS			
OPTIONS	NETTING	VINYL POCKETS	ROPE SUPPORTS
1	BLACK	BLACK	BLACK
2	GREEN	GREEN	BLACK
3	WHITE	WHITE	WHITE

NET MATERIAL OPTIONS	BREAKING STRENGTH
#96 KNOTTED 1-3/4" MESH (DISCUS)	940 LBS
#36 KNOTTED 1-3/4" MESH (BASEBALL)	340 LBS
#21 KNOTTED 1-3/4" MESH (BASEBALL)	210 LBS
#420 KNOTLESS 3/4" MESH (GOLF)	135 LBS
#252 KNOTLESS 3/4" MESH (GOLF)	95 LBS

- 90640N00 WALK DRAW GYMNASIUM DIVIDER NET

- CURTAIN HEIGHT
- CURTAIN LENGTH
- NET MATERIAL
- NET COLOR

# 90640N00 - WALK DRAW GYMNASIUM DIVIDER NET

## TRACK TYPE WALK DRAW GYMNASIUM DIVIDER NET

### SPECIFICATIONS

The curtain shall be made of a nylon netting material. The netting material shall meet the National Fire Protection Association Standard 701 Small Scale Test for flammability resistance.

Bottom of curtain shall contain a concealed chain.

Top hem of curtain shall be 2" wide, solid material with 3/8" I.D. metal spur grommets spaced on 12" centers. Curtain track shall be enclosed, formed channel type to protect rollers from collecting dust, etc., which could hinder the free operation of the curtain. Track shall be heavy-duty type, 16 gauge galvanized steel suspended from building structure at centers not to exceed 8'-0" centers. At curtain stacking area(s), track support spacing shall be 2'-0" on center. Support hardware shall be of heavy-duty high tensile ductile iron, clamp type castings or other heavy-duty supports as prescribed by building conditions and divider locations.

Four wheel ball bearing, swivel type master carriers shall be located at each end of curtain. Intermediate carriers spaced on 12" centers shall be 1" diameter, dual nylon rollers with swivel type hook for attachment of electronically welded and plated, #4 twist line coil chain and S-hooks for attaching to grommets on top hem of curtain with bottom hem hanging approximately 3" above floor.

Each end of divider shall be equipped with snap hook and wall mounted screw eye for securing to wall. Vinyl nylon strap with snap swivel shall also be provided to secure curtain against wall when not in use.

Curtain shall be supplied with 1/2" of fullness per foot of room size to allow curtain to easily extend from wall to wall without stretching taunt (example – on a 50' wall to wall dimension the actual curtain length total of both halves would be 52'-1".)

Curtain stack area – Each foot of length (actual curtain length) requires 1" of stack area. Curtain may be provided in two sections (bi-parting type) allowing one half of the curtain to be stacked on each side of room. Curtain stack area may also be parallel to wall when required by means of a 2'-0" radius curved track and straight track of a length required for proper storage of curtain.

#### NET OPTIONS

- #252 Knotless 3/4" 95 lbs (Golf)
- #420 Knotless 3/4" 135 lbs (Golf)
- #21 Knotted 1 3/4" 210 lbs (Baseball)
- #36 Knotted 1 3/4" 340 lbs (Baseball)
- #96 Knotted 1 3/4" 940 lbs (Discus)

#### WARRANTY

- 640 curtains come with a 1 year limited warranty.
- Other components may be covered by their own extended warranty.

#### COLOR OPTIONS

##### NET

Black, Green, White

Note: Rope hem and rope supports will be black if the netting is black or green. The rope hem and rope supports will be white if the netting white.

#### LEED® SUBMITTAL INFORMATION

Credit	Measure
MRc4-Recycled Content	Post Consumer Average 10.0%      Post Industrial 0%
MRc5-Regional Materials	Raw materials originate from multiple sources so origin point cannot be determined. Final Manufacturing/Assembly in Champaign, IL 61822