

00220-000 - SIDE FOLD BACKSTOP


WALL-MOUNTED SIDE-FOLD BACKSTOP WITH CENTER-STRUT® HEIGHT ADJ.
- RECT. BACKBOARD - 10'-0¹/₈" to 12'-0" EXTENSION

PORTER

WWW.PORTERATHLETIC.COM/FACILITY

BASKETBALL SPECIFICATION SHEET

W-220-R12H

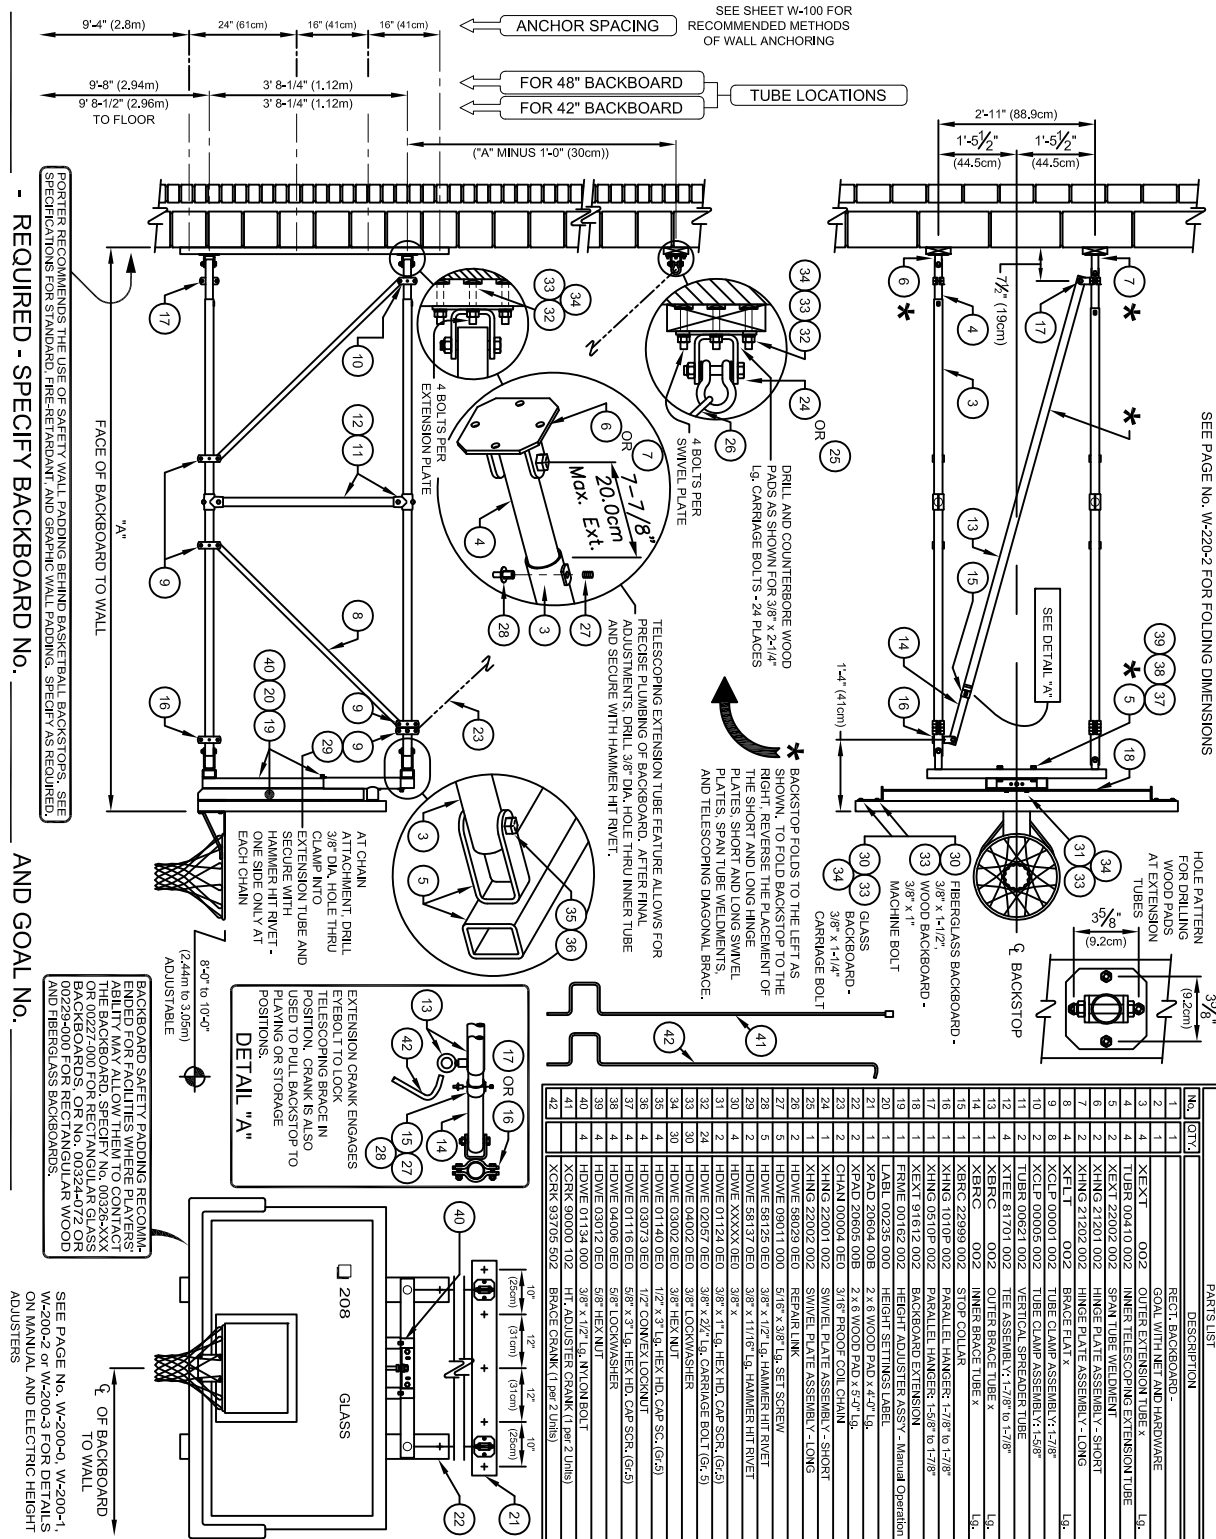

00220-000 - SIDE FOLD BACKSTOP

WALL-MOUNTED SIDE-FOLD BACKSTOP WITH CENTER-STRUT® HEIGHT ADJ.
- RECT. BACKBOARD - 10'-0 $\frac{1}{8}$ " to 12'-0" EXTENSION

SPECIFICATIONS

PORTER No. 00220- WALL-MOUNTED SIDE-FOLD BACKSTOP WITH CENTER-STRUT® HEIGHT ADJUSTMENT UNIT FOR RECTANGULAR BACKBOARD

Backstop shall be wall-mounted side-fold type with face of backboard extended 10' 0-1/8" to 12'-0" from supporting wall. Specify extension.

Extension frames shall be fabricated of four (4) 1-7/8" O.D. tubes with a telescoping end section for ease of installation, and precise plumbing and alignment of backboard with official court markings, even when supported on uneven wall conditions. Ends of telescoping extension frame assemblies shall be drilled and bolted to hinge plate assemblies (short and long) for attachment to the backside of the backboard and to the wall pads. The hinge plate assemblies shall be offset-type, to allow backstop to be folded to a position nearly flat against the wall. The direction of fold is determined at the time of installation by placement of the hinge plate assemblies.

Backstop shall be vertically braced with four (4) 3/16" x 1-1/4" steel tension flats attached at both ends with precision die-formed clamps. Two (2) chain supports (3/16" proof coil chain) shall extend diagonally from the wall to the upper extension tubes, terminating in clamp-type fittings.

Backstop shall be locked into the playing and storage positions by means of a 1-7/8" O.D. telescoping tube assembly, running diagonally across the lower extension tubes. An extension crank shall be provided (one for every two backstops) to operate telescoping brace from the floor. Crank engages eyebolt on telescoping brace to lock it in position. Crank is also used to pull backstop to playing or storage positions.

Southern yellow pine wall pads shall be provided at all wall attachment points. All edges shall be chamfered and pads shall be finished with two finish coats of natural gloss lacquer.

Height adjustment unit shall be designed to provide an adjustable, direct mount Center-Strut® goal attachment system to eliminate any strain on the backboard, should a player hang on the front mounted goal. Height adjustment units without the prescribed direct mount goal feature will not be approved as equal. Height adjustment feature will allow goal height settings from 8'-0" to the official 10'-0" for use by all age groups. Unit shall be designed for use with any official size (4' x 6' or 3'-6" x 6') Porter rectangular backboard and companion front-mount type goal.

Center unitized support frame of height adjustment unit shall be fabricated by dual, 2-3/16" square heavy wall zinc plated guide tubes located on 11-3/16" centers. Ends of guide tubes shall be welded to heavy mounting brackets. Outer dual slide tubes shall support heavy structural steel angle sections which extend downward to accept a direct mount Center-Strut® goal mounting system. Slide tube assembly shall be provided with a heavy, formed steel section to attach a horizontal backboard support assembly to secure the unit to the upper two corners of the rectangular backboard on standard (5'-6") mounting centers.

Height adjustment unit shall incorporate a centrally located 3/4" diameter Acme threaded rod equipped with precision, hardened steel roller thrust bearings for ease of operation from the playing floor by means of an awning crank-type mechanism. Height adjustment system shall incorporate an internal, spring-loaded height locking mechanism to automatically lock and hold unit at any desired goal height during play. Lock mechanism automatically releases when height setting changes are made with adjustment crank assembly. Adjustment crank assembly shall be provided with each pair of height adjustment units. A height setting scale shall be located on the side of the unit to visually determine height settings from 8'-0" to 10'-0" in 3" increments.

Limited lifetime warranty on Porter rectangular backboards when used in conjunction with Porter Center-Strut® height adjustment unit installed on a Porter No. 220 Wall-Mounted Backstop.

All metal parts shall be painted one (1) coat of flat black enamel. (If special painting of colors is required, specify final painting by painting contractor.)

Specify backboard and goal as required.