

# 00312-012 - WALL-BRACED BACKSTOP



## WALL-MOUNTED BACKSTOP WITH CENTER-STRUT® HEIGHT ADJUSTER FAN BACKBOARD - FLUSH MOUNT (1'-2")




WWW.PORTERATHLETIC.COM/FACILITY

### WALL MOUNT SPECIFICATION SHEET

W-312-FFH

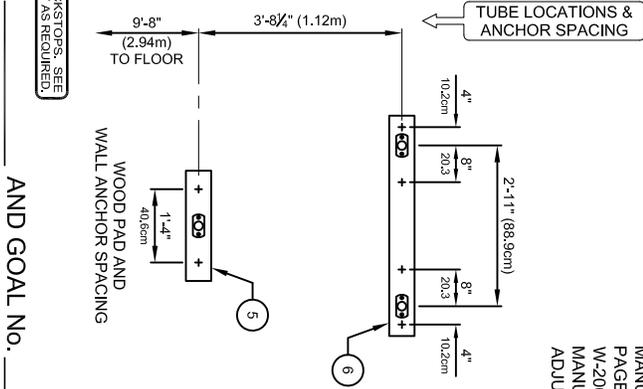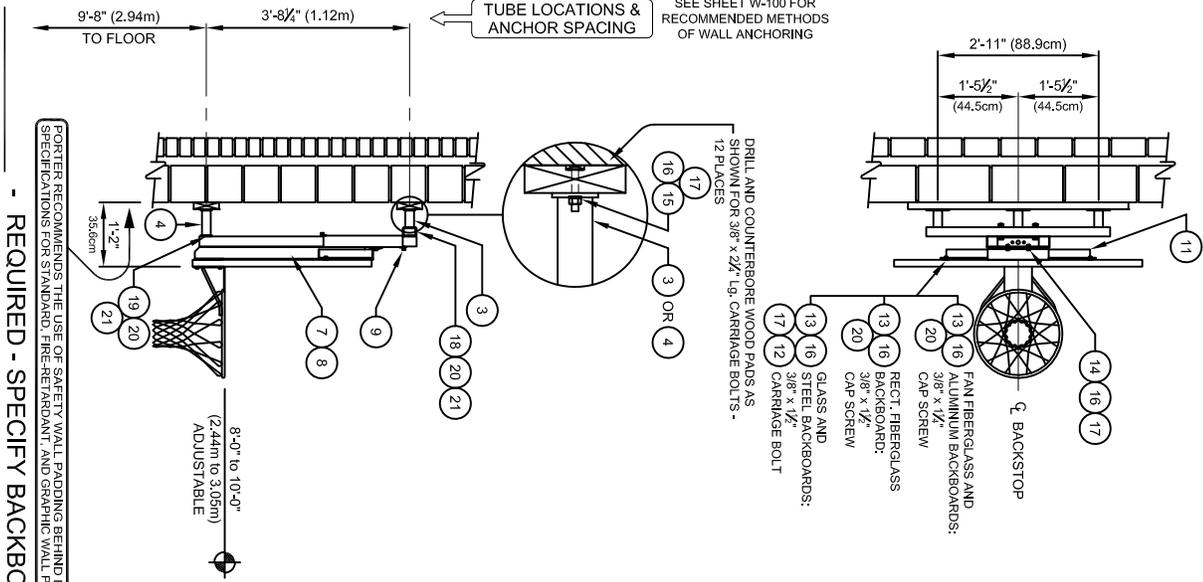

No.	QTY.	PARTS LIST DESCRIPTION
1	1	BACKBOARD:
2	1	GOAL WITH NET AND HARDWARE
3	1	XEXT 31301 002 UPPER SPAN TUBE WELDMENT
4	1	XEXT 31302 002 LOWER EXTENSION WELDMENT
5	1	XPAD 20602 00B 2 x 6 WOOD PAD x 2'-0" Lg.
6	1	XPAD 20604 00B 2 x 6 WOOD PAD x 4'-0" Lg.
7	1	FRWE 00162 002 HEIGHT ADJUSTER ASSY - Manual Operation
8	1	LABL 00235 000 HEIGHT SETTINGS LABEL
9	4	HDWE 01134 000 3/8" x 1/2" Lg. NYLON BOLT
10	**	XCRK 90000 102 HT. ADJUSTER CRANK (1 per 2 Units) **
11	1	FRME 00202 002 FAN BACKBOARD SUPPORT
12	2	SLVE 00078 002 SPACER SLEEVE - 1/4" THICK
13	2	HDWE XXXXX 0E0 3/8" x
14	2	HDWE 01124 0E0 3/8" x 1" Lg. HEX HD. CAP SCREW (Gr.5)
15	6	HDWE 02057 0E0 3/8" x 2 1/4" Lg. CARRIAGE BOLT (Grade 5)
16	10	HDWE 04002 0E0 3/8" LOCKWASHER
17	10	HDWE 03002 0E0 3/8" HEX NUT
18	2	HDWE 01116 0E0 5/8" x 3" Lg. HEX HD. CAP SCREW (Gr.5)
19	2	HDWE 01234 0E0 5/8" x 1 1/2" Lg. HEX HD. CAP SCREW(Gr.5)
20	4	HDWE 04006 0E0 5/8" LOCKWASHER
21	4	HDWE 03012 0E0 5/8" HEX NUT

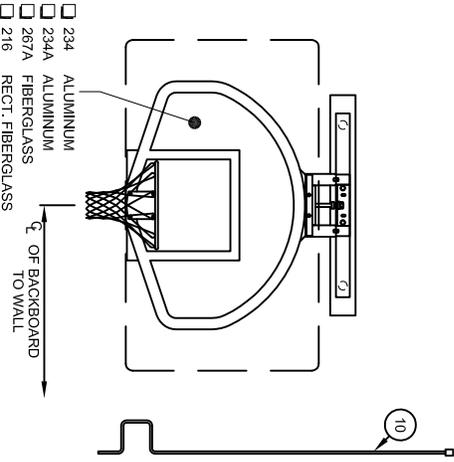

PORTER RECOMMENDS THE USE OF SAFETY WALL PADDING BEHIND BASKETBALL BACKSTOPS. SEE SPECIFICATIONS FOR STANDARD, FIRE-RETARDANT, AND GRAPHIC WALL PADDINGS. SPEEDY AS REQUIRED.

REQUIRED - SPECIFY BACKBOARD No. \_\_\_\_\_ AND GOAL No. \_\_\_\_\_

# 00312-012 - WALL-BRACED BACKSTOP

WALL-MOUNTED BACKSTOP WITH CENTER-STRUT® HEIGHT ADJUSTER  
FAN BACKBOARD - FLUSH MOUNT (1'-2")

## SPECIFICATIONS

### PORTER No. 00312-012 WALL-BRACED BACKSTOP WITH CENTER-STRUT® HEIGHT ADJUSTMENT UNIT FOR FAN BACKBOARD AND RECTANGULAR FIBERGLASS BACKBOARD

Backstop shall be wall-braced type with face of backboard extended 1'-2" from supporting wall.

Extension frames shall be fabricated of three (3) 1-7/8" O.D. tubes. Upper extensions shall terminate in a heavy wall rectangular tube assembly on standard 2'-11" centers for attachment to height adjustment unit. Lower extension shall terminate in a heavy steel flange for attachment to height adjustment unit. Extension frame assemblies shall terminate in heavy steel flanges for attachment to wall pads.

Southern yellow pine wall pads shall be provided at all wall attachment points. All edges shall be chamfered and pads shall be finished with two finish coats of natural gloss lacquer. Height adjustment unit shall be designed to provide an adjustable, direct mount Center-Strut® goal attachment system to eliminate any strain on the backboard, should a player hang on the front mounted goal. Height adjustment units without the prescribed direct mount goal feature will not be approved as equal. Height adjustment feature will allow goal height settings from 8'-0" to the official 10'-0" for use by all age groups. Unit shall be designed for use only with Porter No. 267A fan fiberglass, No. 234 or 234A fan aluminum, or No. 216 rectangular fiberglass backboards and companion front-mount type goal.

Center unitized support frame of height adjustment unit shall be fabricated by dual, 2-3/16" square heavy wall zinc plated guide tubes located on 11-3/16" centers. Ends of guide tubes shall be welded to heavy mounting brackets. Outer dual slide tubes shall support heavy structural steel angle sections which extend downward to accept a direct mount Center-Strut® goal mounting system. Slide tube assembly shall be provided with a heavy, formed steel section to attach a special upper backboard support assembly to secure the unit to the upper two corners of the fan-shaped backboard.

Height adjustment unit shall incorporate a centrally located 3/4" diameter Acme threaded rod equipped with precision, hardened steel roller thrust bearings for ease of operation from the playing floor by means of an awning crank-type mechanism. Height adjustment system shall incorporate an internal, spring-loaded height locking mechanism to automatically lock and hold unit at any desired goal height during play. Lock mechanism automatically releases when height setting changes are made with adjustment crank assembly. Adjustment crank assembly shall be provided with each pair of height adjustment units. A height setting scale shall be located on the side of the unit to visually determine height settings from 8'-0" to 10'-0" in 3" increments.

Limited Lifetime warranty on Porter fan-shaped fiberglass (267A), fan-shaped aluminum (234 or 234A), or rectangular fiberglass (216) backboards when used in conjunction with Porter Center-Strut® height adjustment unit installed on a Porter No. 312 Wall-Braced Backstop.

All metal parts shall be painted one (1) coat of flat black enamel. (If special painting of colors is required, specify final painting by painting contractor.)

Specify backboard and goal as required.