


1973 POWR-RIB II VOLLEYBALL SYSTEM

SLEEVE-TYPE 3" OD ALUMINUM VOLLEYBALL END STANDARDS



Porter
 WWW.PORTERATHLETIC.COM/FACILITY

VOLLEYBALL SPECIFICATION SHEET

V-1973

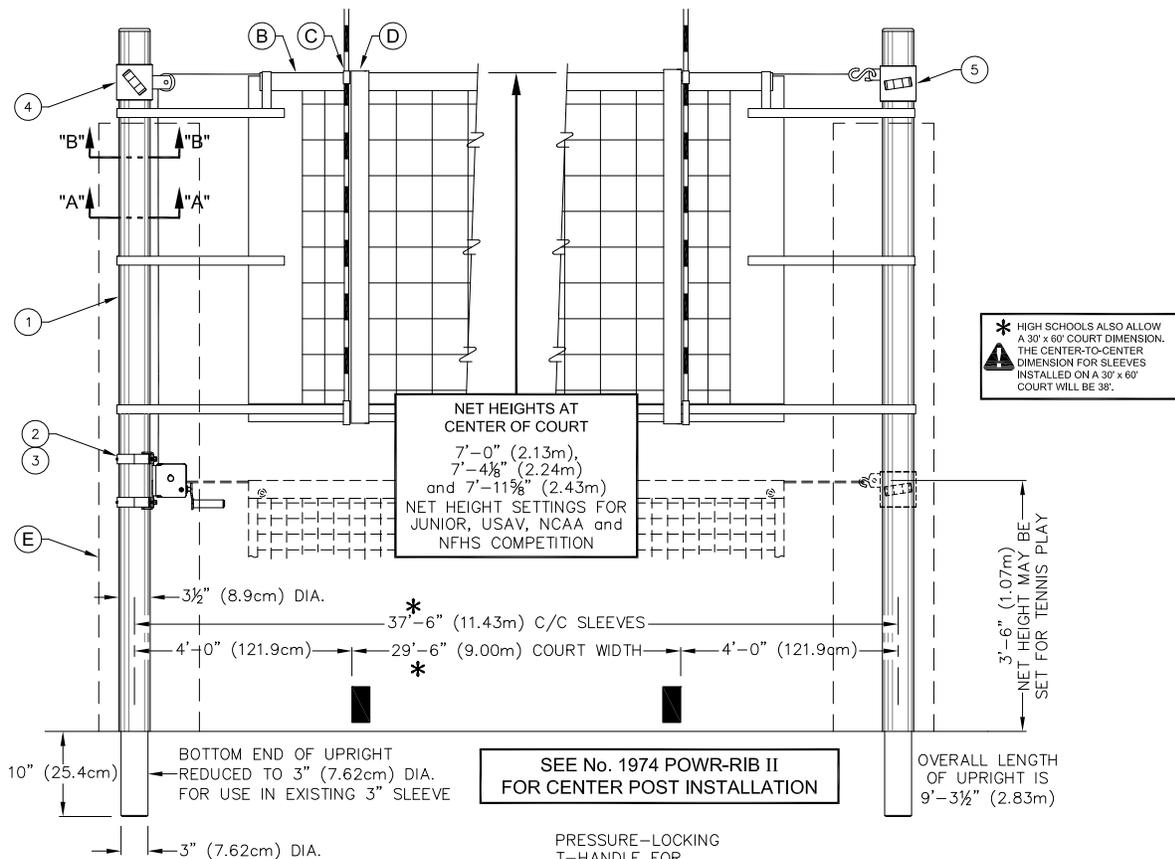

PARTS LIST - No. 1973		
No.	QTY.	DESCRIPTION
1	2	UPRT 00305 000 UPRIGHT ASSEMBLY
2	1	WINH 00113 POWR-SELECT WINCH
3	1	WINH 00114 CRANK FOR POWR-SELECT WINCH
4	1	SLVE 00070 001 SLEEVE WITH PULLEY
5	1	SLVE 00071 001 SLEEVE WITH NET TIE-OFF
6	2	LABL 00167 000 HEIGHT LABEL - 7'-11 1/8"
7	2	LABL 00168 000 HEIGHT LABEL - 7'-4 1/8"
8	2	LABL 00169 001 HEIGHT LABEL - 7'-0"
9	2	LABL 00170 000 HEIGHT LABEL - BADMINTON

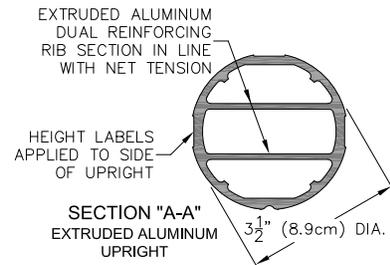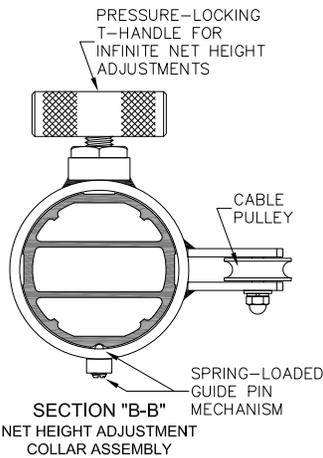

- _____ - 1973 POWR-RIB II 3" VOLLEYBALL STANDARDS (PAIR)
- _____ - 19739XX POWR-RIB II 3" VOLLEYBALL STANDARDS WITH PADS (PAIR)
- _____ - 19739XXSP POWR-RIB II 3" VOLLEYBALL STANDARDS WITH GRAPHIC PADS (PAIR)

QTY	PART No.	DESCRIPTION	No.	PAGE No.
	2295	UNIVERSAL VOLLEYBALL NET (EACH)	B	V-2295
	2297	POWR-SELECT NET ANTENNA (PAIR)	C	V-2297
	00546000	BOUNDARY MARKERS w/ ANTENNA (PAIR)	D	V-546
	8390XX	UPRIGHT CENTER PROTECTIVE PAD (PAIR)	E	V-839
	00889100	JUDGE'S STAND (NOT SHOWN)		V-889-1
	9931XX	PADS FOR JUDGE'S STAND (NOT SHOWN)		V-993-1
	02991340	TENNIS NET - 34' x 39" (NOT SHOWN)		V-2991

Porter[®]

PROJECT NUMBER _____

888-277-7778 PORTER@PORTERATHLETIC.COM
 © COPYRIGHT 2020 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NAME _____

02/27/2020

1973 POWR-RIB II VOLLEYBALL SYSTEM

SLEEVE-TYPE 3" OD ALUMINUM VOLLEYBALL END STANDARDS

SPECIFICATIONS

PORTER No. 1973 POWR-RIB II 3" VOLLEYBALL STANDARDS (PAIR)

Posts shall be provided in a high strength (6063T6), lightweight aluminum alloy, designed with dual internal reinforcing ribs to provide maximum rigidity and minimum deflection. Posts to be finished in a durable clear anodized finish. Top end of upright posts shall be fitted with a special molded, composite type cap.

Uprights shall be 3-1/2" (8.9cm) O.D., with bottom end of uprights fitted with a 3" (7.62cm) dia. x 9-1/2" (24.1cm) long, 1/4" (6.35mm) wall aluminum tube extension for use in existing 3" (7.6cm) dia. type floor sleeves.

Upright posts shall be equipped with special sliding collar devices incorporating a spring-loaded guide pin and positive pressure locking T-handle mechanism for instant net height settings for tennis, badminton and volleyball, to meet all USAV, NCAA and NFHS requirements for competition. Posts shall be furnished with height marking labels for BOYS'/MEN'S height setting of 7' 11-5/8" (2.43m), GIRLS'/WOMEN'S height setting of 7' 4-1/8" (2.24m), 12 YEAR AND UNDER height setting of 7'-0" (2.13m), and BADMINTON height setting of 5'-0" (1.52m).

Adjustable collar assemblies shall be positioned on a vertical axis by means of an external groove in the extruded aluminum upright, which is engaged by a spring-loaded ball/pin mechanism to prevent rotational movement of the collar. A pressure locking, threaded T-handle assembly shall be located on the opposite side of the collar assembly and shall tighten securely against a flat, extruded channel indent on the upright post for a positive locking system.

Tensioning reel shall be a vertical lift, worm gear winch with steel frame. Frame construction shall be of interlocking steel for high rigidity and precise alignment, semi enclosed for safety, and powder coated for corrosion resistance. Self-locking worm drive will prevent snap back or loss of tension. Net shall attach directly to the winch eliminating the need for straps.

Standards shall consist of one reel post and one end post. (For multiple court usage, specify additional No. 1974 Powr-Rib II center standards as required).

NET SELECTION

Specify No. 2235 tennis net if 42'-0" sleeve centers are used.

Specify No. 02991340 tennis net if 35'-6" sleeve centers are used.

Specify No. 2236110 net for badminton application.

WARRANTY

Volleyball system furnished with the following warranty:

Uprights – 10 year limited warranty

Winch – 1 year limited warranty