



2" SEWN 2-SIDED CORNER PAD

Custom Sewn Corner Pad

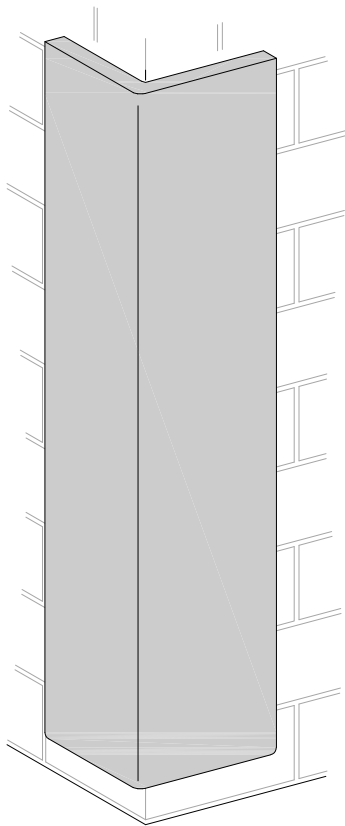

CORNER PAD - ADD 2 SIDES AND 4-3/8" CORNER

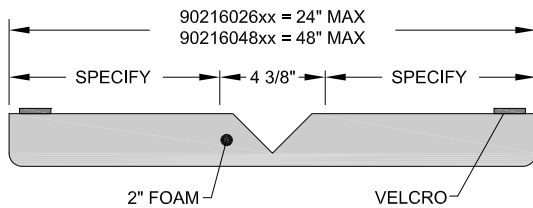


COLOR SELECTION

01 - Light Blue	09 - Gray
02 - Royal Blue	10 - Maroon
03 - Red	11 - Purple
04 - White	12 - Black
05 - Orange	13 - Navy Blue
06 - Yellow Gold	14 - Kelly Green
08 - Tan	15 - Dark Green

SELECT PAD:

- ☐ 90216026xx - 24" x 72" OR LESS CORNER PAD - SEWN
- ☐ 90216048xx - 48" x 96" OR LESS CORNER PAD - SEWN

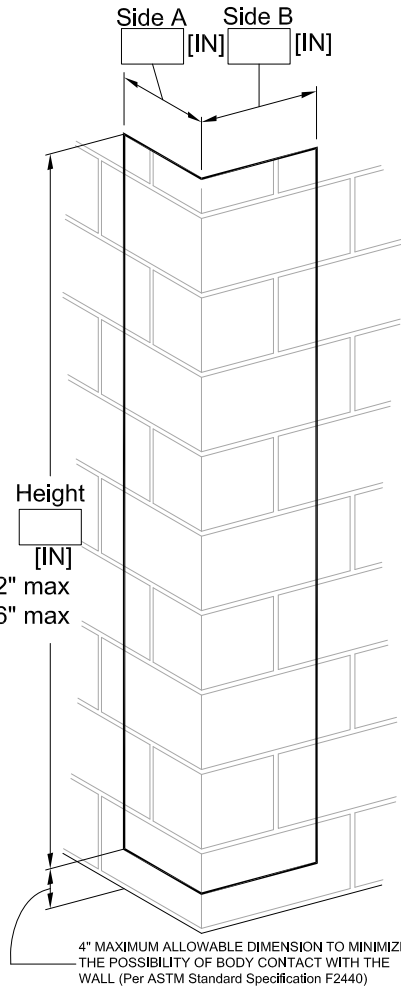

WARNING

This pad is provided to reduce the possibility of minor injuries. However, any activity involving motion and severe impacts may result in serious injuries, including but not limited to paralysis or death. No pad can guarantee the prevention of serious head or neck injuries that are due to a violent impact while participating in various sports activities.

Pad numbers are calculated by adding the lengths of each side and the corner allowances. Maximum total width is 48". Pads requiring more than this dimension must be split into two or more pads.

porter[®]

888-277-7778 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2020 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER

PROJECT NAME

porter

WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90216

6/4/2020

2" SEWN 2-SIDED CORNER PAD

Custom Sewn Corner Pad

SPECIFICATIONS

PORTER No. 90216026xx - 2" SEWN CORNER PAD
24"x72" (EACH)

Pads shall be fabricated to specified dimensions, with a "V" cut in filler as required, to facilitate installation and provide a neat, custom fit on exposed wall corners. Pads are two-sided (corner).

Pads will be constructed of 2" foam and covered with flame-retardant, vinyl-coated polyester sewn casing.

Panel shall meet the min. ASTM F2440 Standard Specification. Panels that have not been tested to this minimum standard shall not be considered as equal.

Entire pad shall be upholstered in a heavy (15-oz.) fire-retardant, high tensile, vinyl-coated polyester fabric material with a leather-like embossed finish. Cover material shall be designated as flame resistant in accordance with NFPA 701, and State of California. The cover material shall have a tear strength of 100 P.S.I. and shall be mildew and rot resistant and fortified with an infection combating fungicide. Vinyl covering is available in 14 colors - see color chart for options.

The installing contractor shall be responsible for proper inspection and installation of all pads. Attachment methods shall be self adhesive hook and loop strips in accordance with current factory suggested procedures.

Certifications:

- ASTM F2440 Standard Specification for Indoor Wall/Feature Padding

PORTER No. 90216048xx - 2" SEWN CORNER PAD
48"x96" (EACH)

Same specifications as above except 48" x 96" or less in size.

porter
WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90216