
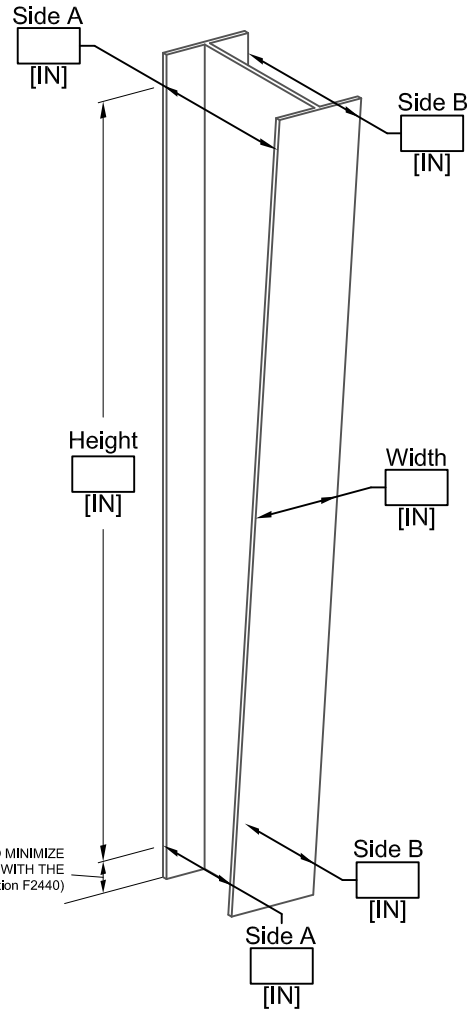


2" DURASAFE 3-SIDED TAPERED PAD


Custom Rigid Back Tapered Pad

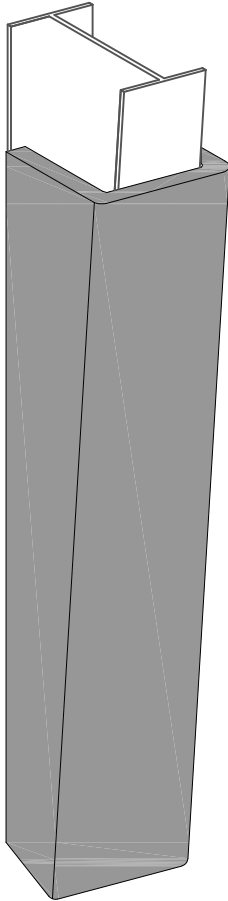

NAILING MARGINS?	
<input type="checkbox"/>	NONE
<input type="checkbox"/>	TOP & BOTTOM
<input type="checkbox"/>	TOP
<input type="checkbox"/>	BOTTOM

4" MAXIMUM ALLOWABLE DIMENSION TO MINIMIZE THE POSSIBILITY OF BODY CONTACT WITH THE WALL (Per ASTM Standard Specification F2440)

TOP UNFOLDED VIEW
TAPERED PAD - ADD 3 SIDES AND 10" ALLOWANCE FOR CORNERS

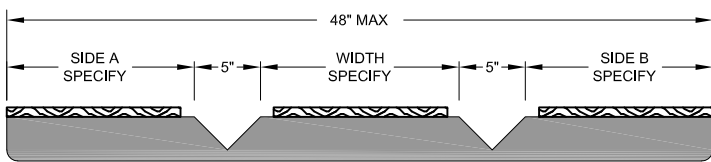

WARNING

This pad is provided to reduce the possibility of minor injuries. However, any activity involving motion and severe impacts may result in serious injuries, including but not limited to paralysis or death. No pad can guarantee the prevention of serious head or neck injuries that are due to a violent impact while participating in various sports activities.

Pad numbers are calculated by adding the lengths of each side and the corner allowances. Maximum total width is 48". Pads requiring more than this dimension must be split into two or more pads.

COLOR SELECTION

<input type="checkbox"/> 01 - Light Blue	<input type="checkbox"/> 09 - Gray
<input type="checkbox"/> 02 - Royal Blue	<input type="checkbox"/> 10 - Maroon
<input type="checkbox"/> 03 - Red	<input type="checkbox"/> 11 - Purple
<input type="checkbox"/> 04 - White	<input type="checkbox"/> 12 - Black
<input type="checkbox"/> 05 - Orange	<input type="checkbox"/> 13 - Navy Blue
<input type="checkbox"/> 06 - Yellow Gold	<input type="checkbox"/> 14 - Kelly Green
<input type="checkbox"/> 08 - Tan	<input type="checkbox"/> 15 - Dark Green

SELECT PAD:

___ 90406048xx - 48" x 96" OR LESS 3-SIDED TAPERED PAD - RIGID BACK

porter[®]

888-277-7778 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2017 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER

PROJECT NAME

porter
WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90406

7/14/2020

2" DURASAFE 3-SIDED TAPERED PAD

Custom Rigid Back Tapered Pad

SPECIFICATIONS

PORTER No. 90406048xx - 2" DURASAFE 3-SIDED TAPERED PAD
48"x96" - RIGID BACK (EACH)

Pads shall be fabricated to specified dimensions, with a "V" cut in filler and backing board as required, to facilitate installation and provide a neat, custom fit on exposed wall corners. Pads are three-sided (column).

Pads will be constructed of 2" foam cemented to 7/16" backing board and covered with flame-retardant, vinyl-coated polyester folded and stapled securely to back of oriented strand board.

Panel shall meet the min. ASTM F2440 Standard Specification. Panels that have not been tested to this minimum standard shall not be considered as equal.

Entire face of panel, including the 1" nailing margins, shall be upholstered in a heavy (19-oz.) fire-retardant, high tensile, vinyl-coated polyester fabric material. Cover material shall be designated as flame resistant in accordance with NFPA 701, and State of California. The cover material shall be mildew and rot resistant and fortified with an infection combating fungicide. Vinyl covering shall be folded and stapled securely to backside of oriented strand board. Vinyl covering is available in 14 colors - see color chart for options.

The installing contractor shall be responsible for proper inspection and installation of all pads. Attachment methods including but not limited to 1" nailing margins and/or "Z" clips supplied as specified. Installation shall be made in accordance with current factory suggested procedures.

Certifications:

- ASTM F2440 Standard Specification for Indoor Wall/Feature Padding

PORTER
WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90406