

2" SEWN 2-SIDED TAPERED PAD



Custom Sewn Tapered Pad

Porter

WWW.PORTERATHLETIC.COM/FACILITY


WALL PAD SPECIFICATION SHEET

G-90516

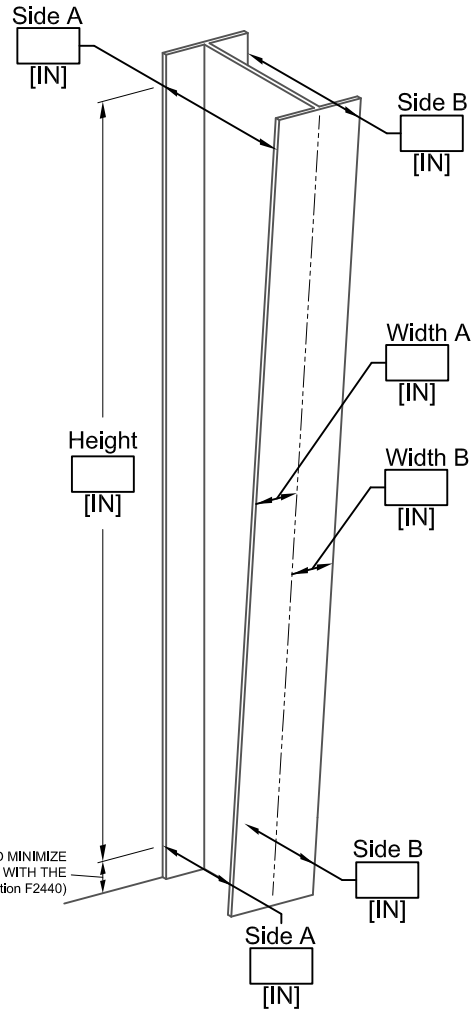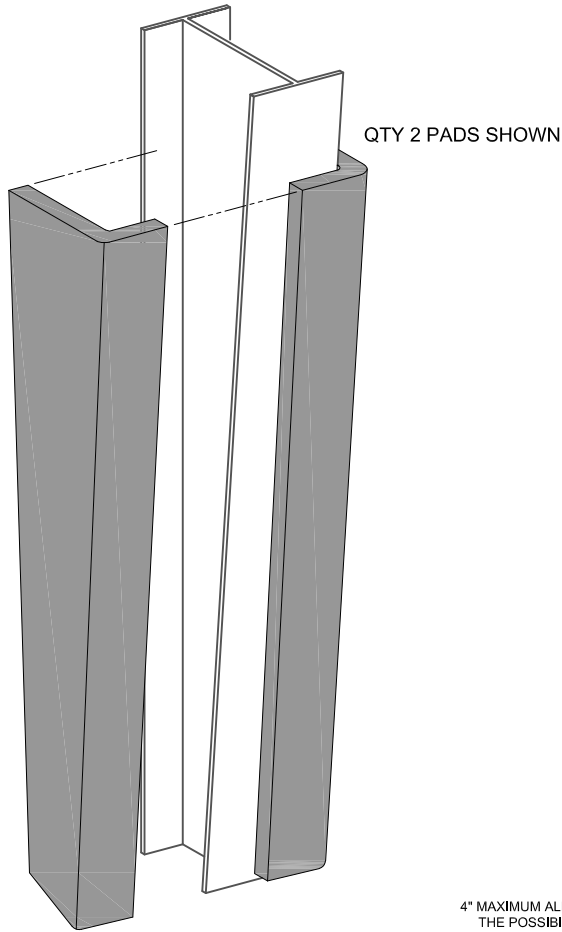

4" MAXIMUM ALLOWABLE DIMENSION TO MINIMIZE THE POSSIBILITY OF BODY CONTACT WITH THE WALL (Per ASTM Standard Specification F2440)

TOP UNFOLDED VIEW - QTY 2 PADS SHOWN

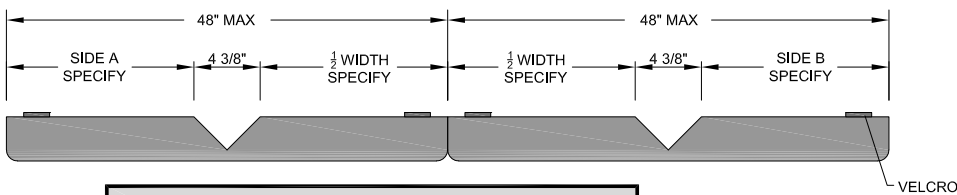

COLOR SELECTION

<input type="checkbox"/> 01 - Light Blue	<input type="checkbox"/> 09 - Gray
<input type="checkbox"/> 02 - Royal Blue	<input type="checkbox"/> 10 - Maroon
<input type="checkbox"/> 03 - Red	<input type="checkbox"/> 11 - Purple
<input type="checkbox"/> 04 - White	<input type="checkbox"/> 12 - Black
<input type="checkbox"/> 05 - Orange	<input type="checkbox"/> 13 - Navy Blue
<input type="checkbox"/> 06 - Yellow Gold	<input type="checkbox"/> 14 - Kelly Green
<input type="checkbox"/> 08 - Tan	<input type="checkbox"/> 15 - Dark Green



WARNING

This pad is provided to reduce the possibility of minor injuries. However, any activity involving motion and severe impacts may result in serious injuries, including but not limited to paralysis or death. No pad can guarantee the prevention of serious head or neck injuries that are due to a violent impact while participating in various sports activities.

SELECT PAD:

___ 90516048xx - 48" x 96" OR LESS 2-SIDED TAPERED PAD - SEWN

Porter[®]

888-277-7778 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2021 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER _____

PROJECT NAME _____

4/20/2021

2" SEWN 2-SIDED TAPERED PAD

Custom Sewn Tapered Pad

SPECIFICATIONS

PORTER No. 90516048xx - 2" SEWN 2-SIDED TAPERED PAD
48"x96" (EACH)

Pads shall be fabricated to specified dimensions, with a "V" cut in filler as required, to facilitate installation and provide a neat, custom fit on exposed wall corners. Pads are two-sided, and tapered

Pads will be constructed of 2" Polyethylene foam and covered with flame-retardant, vinyl-coated polyester sewn casing.

Panel shall meet the min. ASTM F2440 Standard Specification. Panels that have not been tested to this minimum standard shall not be considered as equal.

Entire pad shall be upholstered in a heavy (15-oz.) fire-retardant, high tensile, vinyl-coated polyester fabric material with a leather-like embossed finish. Cover material shall be designated as flame resistant in accordance with NFPA 701, and State of California. The cover material shall be mildew and rot resistant and fortified with an infection combating fungicide. Vinyl covering is available in 14 colors - see color chart for options.

The installing contractor shall be responsible for proper inspection and installation of all pads. Attachment methods shall be self adhesive hook and loop strips in accordance with current factory suggested procedures.

Certifications:

- ASTM F2440 Standard Specification for Indoor Wall/Feature Padding

PORTER
WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90516