

90955000 - SIDE FOLD BACKSTOP

CEILING SUSPENDED, SIDE FOLD, SIDE BRACED UNIT
18' TO 28' \varnothing OF MAST PIPE TO FINISHED FLOOR

PRECISION DIE-FORMED SUPPORT FITTING STANDARD
(MAY VARY BASED ON GYMNASIUM SUPERSTRUCTURE)

GYMNASIUM SUPERSTRUCTURE
(SHOWN FOR REPRESENTATION
PURPOSES ONLY, MAY VARY)

$\varnothing 3\frac{1}{2}$ " O.D. PIPE STANDARD
(SUPERSTRUCTURE ENGINEERED PER BUILDING REQUIREMENTS)



$\varnothing 1\frac{7}{8}$ " O.D. SIDE BRACE

CENTER-STRUT® DIRECT
MOUNT SYSTEM

$\varnothing 6\frac{5}{8}$ " O.D. STEM

FULLY WELDED
MAST

BACKBOARD SAFETY
PADDING (OPTIONAL)

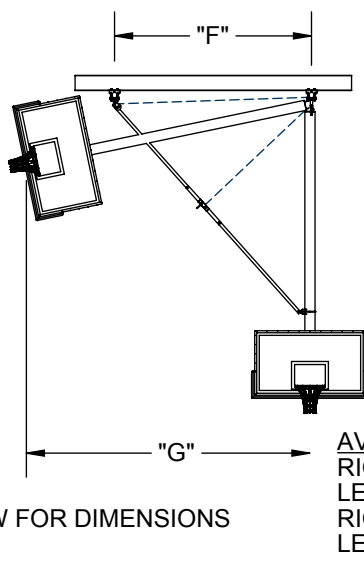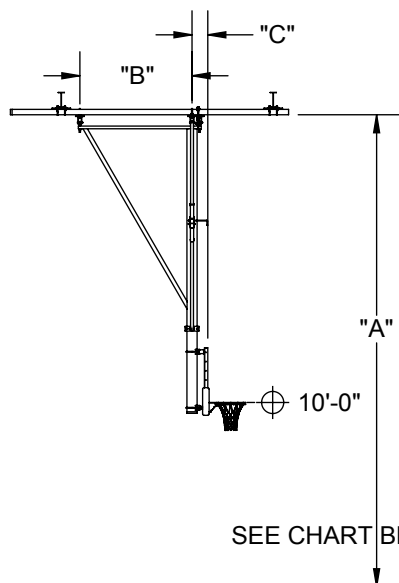

AVAILABLE ORIENTATIONS:
RIGHT FOLD BACK BRACED,
LEFT FOLD BACK BRACED,
RIGHT FOLD FRONT BRACED,
LEFT FOLD FRONT BRACED

SEE CHART BELOW FOR DIMENSIONS

"A" BOTTOM OF STRUCTURE ABOVE FINISHED FLOOR	"B" MAST CENTERS	"C" FACE OF BACKBOARD TO MAST	"F" SIDE BRACE DIMENSION (WITHIN 6" ±)	"G" HORIZONTAL FOLD DIMENSION
18'-0" to 19'-0"	5'-0"	SEE "C" DIMENSION CHART	3'-9"	10'-3"
19' 0-1/8" to 20'-0"	5'-0"		4'-9"	11'-3"
20' 0-1/8" to 21'-0"	5'-6"		5'-9"	12'-3"
21' 0-1/8" to 22'-0"	5'-6"		6'-9"	13'-3"
22' 0-1/8" to 23'-0"	6'-0"		7'-9"	14'-3"
23' 0-1/8" to 24'-0"	6'-0"		8'-9"	15'-3"
24' 0-1/8" to 25'-0"	6'-6"		9'-9"	16'-3"
25' 0-1/8" to 26'-0"	6'-6"		10'-9"	17'-3"
26' 0-1/8" to 27'-0"	7'-0"		11'-9"	18'-3"
27' 0-1/8" to 28'-0"	7'-0"		12'-9"	19'-3"

"C" DIMENSION CHART- FACE OF BACKBOARD TO CENTERLINE OF MAST			
BACKBOARD MODEL NUMBER	DESCRIPTION	WITHOUT HEIGHT ADJUSTER	WITH HEIGHT ADJUSTER
208	RECTANGULAR GLASS	10-1/8"	12-11/16"
216	RECTANGULAR FIBERGLASS	9-7/8"	12-7/16"
243A	FAN ALUMINUM	9-5/16"	11-7/8"
267A	FAN FIBERGLASS	9-1/4"	11-13/16"

*UNITS UNDER 20' BOTTOM OF STRUCTURE
REQUIRE $3\frac{1}{2}$ " ADDITIONAL OFFSET

- _____ - 90955000 CEILING SUSPENDED, SIDE FOLD, SIDE BRACED UNIT
- _____ - BACKBOARD SELECTION
- _____ - GOAL SELECTION
- _____ - PADDING SELECTION

PROJECT NUMBER _____

PROJECT NAME _____

90955000 - SIDE FOLD BACKSTOP

CEILING SUSPENDED, SIDE FOLD, SIDE BRACED UNIT
18' TO 28' \varnothing OF MAST PIPE TO FINISHED FLOOR

SPECIFICATIONS

Basketball backstop shall consist of a main center mast of 6-5/8" O.D. heavy-wall structural steel tube with diagonal side sway braces of 2-1/2" x 1-1/2" rectangular steel tubing. Ends of diagonal brace tubes shall be fully welded to mainmast. Top horizontal mast member to be of a heavy 5" structural channel to support adjustable suspension hangers. Mast shall be fully welded and suspended by adjustable hangers (2) to provide for precise plumbing of frame during installation. Support hangers shall be offset a minimum of 1" behind centerline of welded mast to properly weight lock unit in playing position.

Goal shall mount directly through backboard and into a heavy structural steel Center-Strut® weldment which shall be clamped to the vertical 6-5/8" O.D. center support to eliminate any strain on backboard should a player hang on the front mounted goal (conforms to the NCAA latest rules). All fittings shall be attached to the 6-5/8" O.D. vertical drop tube by heavy 1/4" thick precision saddle die-cut formed steel fittings secured in place by 5/8" diameter 'U'-Bolt type hardware.

Backstop to operate with a 1-7/8" O.D. side brace assembly with a folding knee joint. Knee joint to incorporate an internal torsion spring design to lock brace assembly firmly in playing position. Hoist cable shall automatically disengage brace knee joint during the hoist cycle.

Backstop shall be supported from pipe anchored to roof framing members by precision die formed support fittings or custom attachments as required. All cap screws shall be rated a minimum SAE Grade 5. Grade 2 cap screws will not be approved as equal.

All metal parts shall be powder coated. See swatch card SMPL00048037 for standard color options. (contact Porter for custom color requests)

Backstop provided with specified backboard and goal (see B-200 for options).

See winch specifications for more information on included Porter winch system and control options. (manual- see B-700, electric- see B-701)

WARRANTY

- No. 900 Center-Strut® series backstop structure comes with a 25 year limited warranty.
- Limited Lifetime warranty on all Porter backboards when used in conjunction with the No. 900 Center-Strut® series backstop.
- Other components may be covered by their own warranty (see corresponding specifications for more details).

OPTIONAL ITEMS (SEE SPECIFICATION SHEETS FOR DETAIL)

- Backboard safety padding (see B-200)
- Height Adjuster (8' to 10' adjustable goal height) (see chart below)
- Saf-Strap (No. 10797100)

CENTER-STRUT® HEIGHT ADJUSTER

- | | | |
|---|--------------------------------|------------------------|
| • For Manual Operation, See Page No.: | B-900-506 (Rectangular Boards) | B-900-211 (Fan Boards) |
| • For Key Switch Operation, See Page No.: | B-901-506 (Rectangular Boards) | B-901-211 (Fan Boards) |
| • For Powr-Stick Operation, See Page No.: | B-902-506 (Rectangular Boards) | B-902-211 (Fan Boards) |
| • For Sportsonic® II Operation, See Page No.: | B-903-506 (Rectangular Boards) | B-903-211 (Fan Boards) |
| • For Powr-Touch Operation, See Page No.: | B-904-506 (Rectangular Boards) | B-904-211 (Fan Boards) |

LEED® SUBMITTAL INFORMATION

Credit	Measure
MRc4-Recycled Content	Post Consumer Average 25.0% Post Industrial 0%
MRc5-Regional Materials	Raw materials originate from multiple sources so origin point cannot be determined. Final Manufacturing/Assembly in Champaign, IL 61822

CERTIFICATIONS

- Certified by the NCAA and NFHS