

# 90955000 - SIDE FOLD BACKSTOP

CEILING SUSPENDED, SIDE FOLD, SIDE BRACED UNIT  
32' TO 40'  $\phi$  OF MAST PIPE TO FINISHED FLOOR

$\phi 3\frac{1}{2}$ " O.D. PIPE STANDARD

(SUPERSTRUCTURE ENGINEERED PER BUILDING REQUIREMENTS)

PRECISION DIE-FORMED SUPPORT FITTING STANDARD  
(MAY VARY BASED ON GYMNASIUM SUPERSTRUCTURE)

GYMNASIUM SUPERSTRUCTURE  
(SHOWN FOR REPRESENTATION  
PURPOSES ONLY, MAY VARY)


CENTER-STRUT®  
DIRECT MOUNT  
SYSTEM

$\phi 2\frac{3}{8}$ " O.D. SIDE  
BRACE

$\phi 6\frac{5}{8}$ " O.D.  
STEM

FULLY WELDED  
MAST

BACKBOARD SAFETY  
PADDING (OPTIONAL)

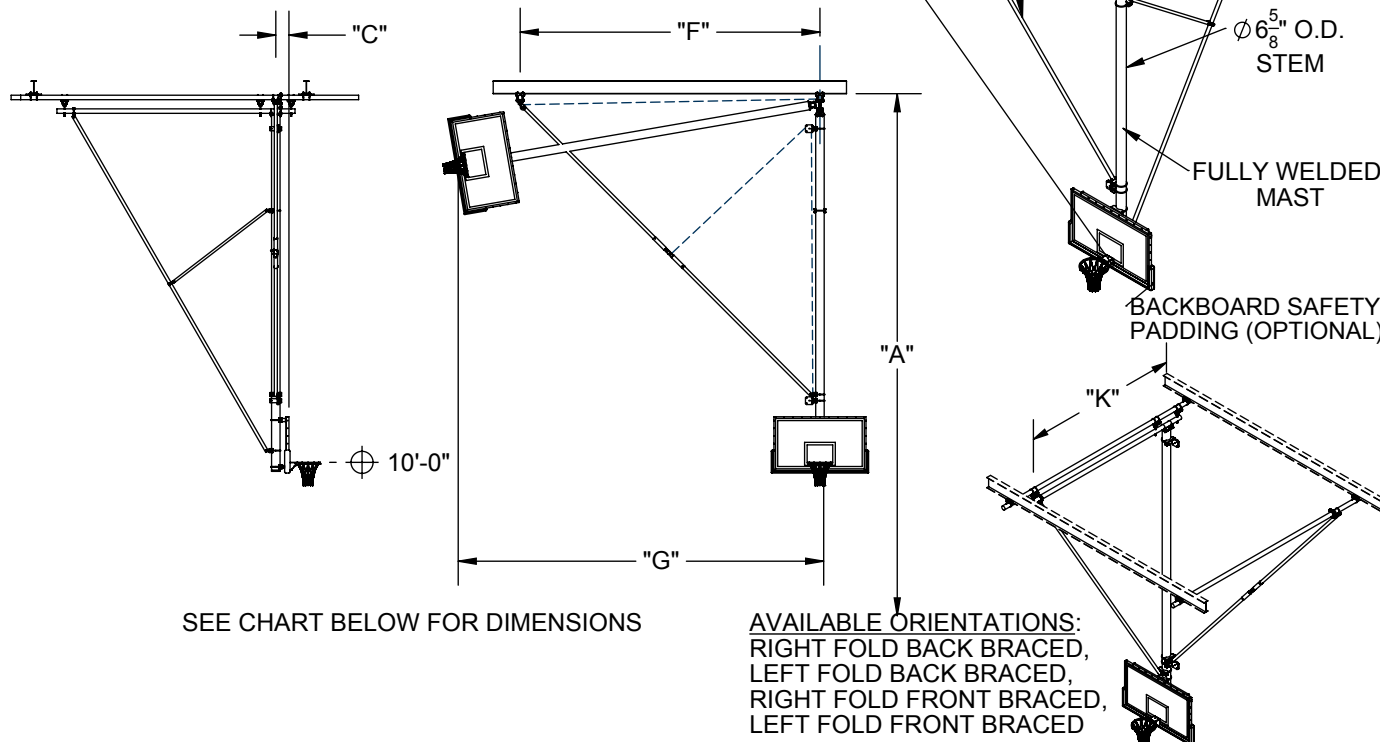

SEE CHART BELOW FOR DIMENSIONS

AVAILABLE ORIENTATIONS:  
RIGHT FOLD BACK BRACED,  
LEFT FOLD BACK BRACED,  
RIGHT FOLD FRONT BRACED,  
LEFT FOLD FRONT BRACED

"A" BOTTOM OF STRUCTURE ABOVE FINISHED FLOOR	"C" FACE OF BACKBOARD TO $\phi$ MAST	"F" SIDE BRACE DIMENSION (WITHIN 6" $\pm$ )	"G" HORIZONTAL FOLD DIMENSION	"I" $\phi$ OF MAST TO BACK MAST HANGER	"K" $\phi$ OF MAST TO FRONT BRACE HANGER
32' 0-1/8" to 33'-0"	SEE "C" DIMENSION CHART	18'-6"	24'-3"	12'-2"	15'-0"
33' 0-1/8" to 34'-0"		19'-6"	25'-3"	12'-9"	15'-10"
34' 0-1/8" to 35'-0"		20'-6"	26'-3"	13'-4"	16'-8"
35' 0-1/8" to 36'-0"		21'-6"	27'-3"	13'-11"	17'-6"
36' 0-1/8" to 37'-0"		22'-6"	28'-3"	14'-6"	18'-4"
37' 0-1/8" to 38'-0"		23'-6"	29'-3"	15'-1"	19'-2"
38' 0-1/8" to 39'-0"		24'-6"	30'-3"	15'-8"	20'-0"
39' 0-1/8" to 40'-0"		25'-6"	31'-3"	16'-4"	20'-10"

"C" DIMENSION CHART- FACE OF BACKBOARD TO CENTERLINE OF MAST			
BACKBOARD MODEL NUMBER	DESCRIPTION	WITHOUT HEIGHT ADJUSTER	WITH HEIGHT ADJUSTER
208	RECTANGULAR GLASS	10-1/8"	12-11/16"
216	RECTANGULAR FIBERGLASS	9-7/8"	12-7/16"
234A	FAN ALUMINUM	9-5/16"	11-7/8"
267A	FAN FIBERGLASS	9-1/4"	11-13/16"

- \_\_\_\_\_ - 90955000 CEILING SUSPENDED, SIDE FOLD, SIDE BRACED UNIT
- \_\_\_\_\_ - BACKBOARD SELECTION
- \_\_\_\_\_ - GOAL SELECTION
- \_\_\_\_\_ - PADDING SELECTION

PROJECT NUMBER \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

# 90955000 - SIDE FOLD BACKSTOP

CEILING SUSPENDED, SIDE FOLD, SIDE BRACED UNIT  
32' TO 40' C OF MAST PIPE TO FINISHED FLOOR

## SPECIFICATIONS

Basketball backstop shall consist of a main center mast of 6-5/8" O.D. heavy-wall structural steel tube with rear diagonal brace of 2-3/8" O.D. tubing. Top horizontal mast member to be of a heavy 3-1/2" O.D. tubing to form a rigid triangular design. Internal web type bracing of heavy 1-7/8" O.D. tube shall be provided as required by unit size. Mast shall be shipped as a bolt-together assembly due to size of unit. Welded mast shall be suspended by adjustable hangers (3) to provide for precise plumbing of frame during installation.

Goal shall mount directly through backboard and into a heavy structural steel Center-Strut® weldment which shall be clamped to the vertical 6-5/8" O.D. center support to eliminate any strain on backboard should a player hang on the front mounted goal (conforms to the NCAA latest rules). All fittings shall be attached to the 6-5/8" O.D. vertical drop tube by heavy 1/4" thick precision saddle die-cut formed steel fittings secured in place by 5/8" diameter 'U'-Bolt type hardware.

Backstop to operate with a 2-3/8" O.D. side brace assembly with a folding knee joint. Knee joint to incorporate an internal torsion spring design to lock brace assembly firmly in playing position. Hoist cable shall automatically disengage brace knee joint during the hoist cycle.

Backstop shall be supported from pipe anchored to roof framing members by precision die formed support fittings or custom attachments as required. All cap screws shall be rated a minimum SAE Grade 5. Grade 2 cap screws will not be approved as equal.

All metal parts shall be powder coated. See swatch card SMPL00048037 for standard color options. (contact Porter for custom color requests)

Backstop provided with specified backboard and goal (see B-200 for options).

See winch specifications for more information on included Porter winch system and control options. (B-701)

## WARRANTY

- No. 900 Center-Strut® series backstop structure comes with a 25 year limited warranty.
- Limited Lifetime warranty on all Porter backboards when used in conjunction with the No. 900 Center-Strut® series backstop.
- Other components may be covered by their own warranty (see corresponding specifications for more details).

## OPTIONAL ITEMS (SEE SPECIFICATION SHEETS FOR DETAIL)

- Backboard safety padding (see B-200)
- Height Adjuster (8' to 10' adjustable goal height) (see chart below)
- Saf-Strap (No. 10797100)
- Retractor Reel (No. 10799100, 10799110); with Saf-Strap (No. 10799200, 10799210)

## CENTER-STRUT® HEIGHT ADJUSTER

- For Manual Operation, See Page No.: B-900-506 (Rectangular Boards) B-900-211 (Fan Boards)
- For Key Switch Operation, See Page No.: B-901-506 (Rectangular Boards) B-901-211 (Fan Boards)
- For Powr-Stick Operation, See Page No.: B-902-506 (Rectangular Boards) B-902-211 (Fan Boards)
- For Sportsonic® II Operation, See Page No.: B-903-506 (Rectangular Boards) B-903-211 (Fan Boards)
- For Powr-Touch Operation, See Page No.: B-904-506 (Rectangular Boards) B-904-211 (Fan Boards)

## LEED® SUBMITTAL INFORMATION

Credit	Measure
MRc4-Recycled Content	Post Consumer Average 25.0% Post Industrial 0%
MRc5-Regional Materials	Raw materials originate from multiple sources so origin point cannot be determined. Final Manufacturing/Assembly in Champaign, IL 61822

## CERTIFICATIONS

- Certified by the NCAA and NFHS