

174 - GOOSENECK OUTDOOR BACKSTOP

4' EXTENDED OUTDOOR BACKSTOP FOR FAN BACKBOARDS

Porter

WWW.PORTERATHLETIC.COM/FACILITY



BASKETBALL SPECIFICATION SHEET

R-174

4/04/2018

SHOWN WITH No. 267 FAN FIBERGLASS BACKBOARD
SELECT BACKBOARD FROM CHART BELOW

SHOWN WITH No. 00235000
STANDARD GOAL - SELECT
GOAL FROM CHART BELOW

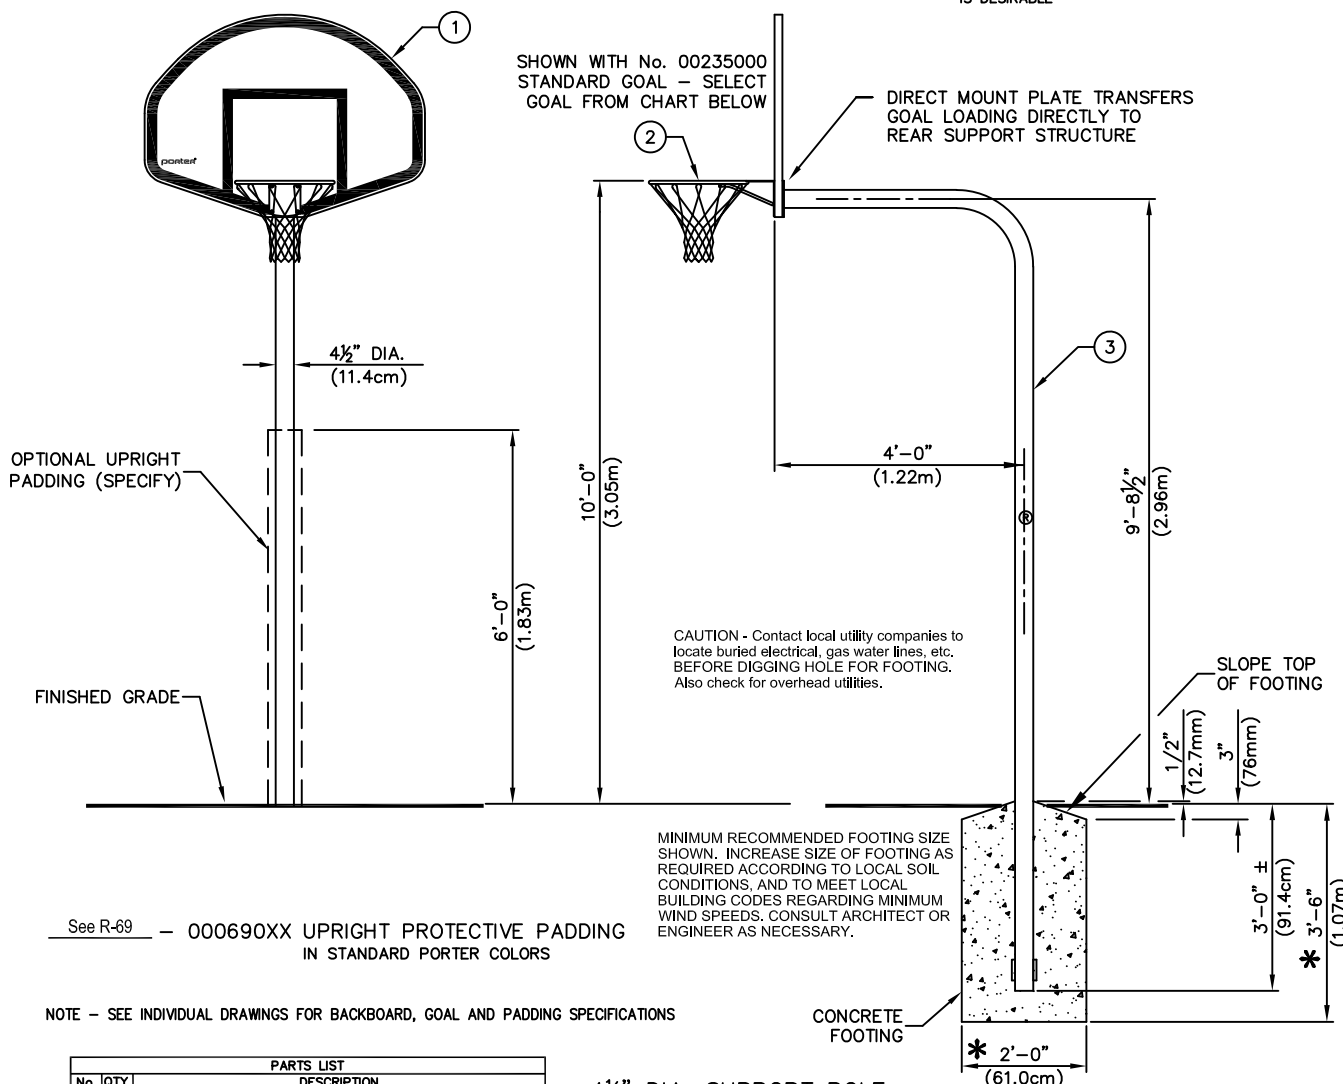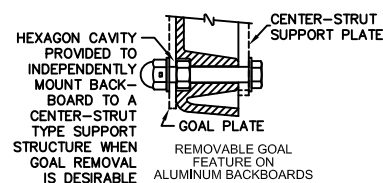

NOTE - SEE INDIVIDUAL DRAWINGS FOR BACKBOARD, GOAL AND PADDING SPECIFICATIONS

PARTS LIST	
No.	QTY.
1	1
2	1
3	1

4 1/2" DIA. SUPPORT POLE
GOOSENECK POLE STYLE

PART NUMBER:

— 174 __
(Galvanized)

— 174 __ CXX
(Powder-coat, select color)

NOTE - Upright can be provided in Porter's standard powder-coat colors at additional cost. Refer to Porter's power-coat color chart.

BOARD	GOAL	00235000	00202H00	00251H00	236H00
267	12	13	14	15	
234	22	23	24	25	
234A	32	33	34	35	

EXAMPLE: No. 17415 - INCLUDES 267 FIBERGLASS BACKBOARD AND 236H00 GOAL

COLOR SELECTION (For 174 __ CXX only)

01 - Light Blue	10 - Maroon
02 - Royal Blue	11 - Purple
03 - Red	12 - Black (Gloss)
04 - White	13 - Navy Blue
05 - Orange	14 - Kelly Green
06 - Yellow Gold	15 - Dark Green
07 - Silver	22 - Arch. Gray
08 - Gold	23 - Arch. Black
09 - Gray	

Porter

1-800-637-3090 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2018 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER

PROJECT NAME

174 - GOOSENECK OUTDOOR BACKSTOP

4' EXTENDED OUTDOOR BACKSTOP FOR FAN BACKBOARDS

SPECIFICATIONS

PORTER No. 174 __ (CXX) – 4' EXTENDED SINGLE POST BACKSTOP

Face of backboard shall be 4'-0" (1.22m) extended from the centerline of the formed upright support. Upright support shall be 4-1/2" (11.4cm) O.D., 7ga. wall, zinc Flo-Coat steel tube formed to an approximate 24" (30.5cm) radius. Vertical section shall extend 3'-0" (91.4cm) into a concrete footing and shall be secured by welded anchor lugs. Horizontal section shall be fabricated with a special, slotted mounting plate to level the backboard and goal. Bolts from the front mounted goal shall mount directly through the backboard and into the Center-Strut® mounting plate to eliminate any strain on the backboard should a player hang on the front mounted goal.

__ designates backboard and goal required – see chart on opposite side of this sheet for selection – specify. For specifications of backboards or goals, see specific page in backboard/goal section.

CXX designates optional powder coat color - see chart on opposite side of the sheet for selection - specify. Upright can be provided in Porter's standard powder-coat colors. Refer to Porter's powder-coat color chart.

OPTIONAL ITEMS TO SPECIFY

See Page No. R-69 for specifications on Porter No. 000690XX Upright Padding (Each).